

# Flow Measurement

## SITRANS F C

### Transmitter MASS 6000 for 19" insert/19" wall mounting

#### Overview



MASS 6000 is based on the latest developments within digital signal processing technology – engineered for high performance, fast flow step response, fast batching applications, high immunity against process noise, easy to install, commission and maintain.

The MASS 6000 transmitter delivers true multi parameter measurements i.e.: Mass flow, volume flow, density, temperature and fraction.

The MASS 6000 19" transmitter can be connected to all sensors of types MASS 2100/MC2/FC300 and are available in different versions depending of number of output facilities, Ex protection and grade of enclosure.

#### Benefits

- Dedicated mass flow chip with the latest ASIC technology
- Fast batching and flow step response with an update rate of true 30 Hz
- Superior noise immunity due to a patented DFT (Discrete Fourier Transformation) algorithm.
- Front end resolution better than 0.35 ns improves zero point stability and enhances dynamic turn-down ratio on flow and density accuracy.
- Advanced diagnosis and service menu enhances troubleshooting and meter verification.
- Built-in batch controller with compensation and monitoring comprising 2 built-in totalizers
- Multi-parameter outputs, individual configurable for mass flow, volume flow, density, temperature or fraction flow such as BRIX or PLATO
- Many output capacities, up to 3 current, 2 frequency/pulse and 2 relay outputs (excludes the possibility of an add-on module)
- Digital input for batch-control, remote zero adjust or forced output mode
- All outputs can be forced to preset value for simulation, verification or calibration purposes.
- User-configurable operation menu with password protection
  - 3 lines, 20 characters display in 11 languages
  - Self-explaining error handling/log in text format
  - Keypad can be used for controlling batch as start/stop/hold/reset

- SENSORPROM technology automatically configures transmitter at start-up providing:
  - Factory pre-programming with calibration data, pipe size, sensor type, output settings
  - Any values or settings changed by users are stored automatically
  - Automatically re-programming any new transmitter without loss of accuracy
  - Transmitter replacement in less than 5 minutes. True "plug & play"
- 4-wire Pt1000 temperature measurement ensures optimum accuracy on mass flow, density and fraction flow
- Fraction flow computation based on a 5th-order algorithm matching all applications
- USM II platform enables fitting of add-on bus modules without loss of functionality.
  - All modules can be fitted as true "plug & play"
  - Module and transmitter automatically configured through the SENSORPROM.
- Transmitter available with ATEX and UL approval
- All electrical connections are easily accessible on the large back plane PCB

#### Application

SITRANS F C Coriolis mass flowmeters are suitable for all applications within the entire process industry, where there is a demand for accurate flow measurement. The meter can measure both liquids and gases.

The main applications for the MASS 6000 19" transmitter can be found in:

- Chemical and pharmaceutical industries
- Food and beverage industries
- Automotive industry
- Oil and gas industry
- Power generation and utility industry
- Water and waste water industry

#### Design

The transmitter is designed as a 19" insert as base to be used in:

- 19" rack system
- Panel mounting IP66/NEMA 4
- Back of panel mounting IP20/NEMA 1
- Wall mounting IP66/NEMA 4

The MASS 6000 19" is available as standard or as ATEX-approved transmitter which is to be mounted in the safe area.

# Flow Measurement

## SITRANS F C

### Transmitter MASS 6000 for 19" insert/19" wall mounting

#### Function

The following functions are available:

- Mass flow rate, volume flow rate, density, temperature, fraction flow
- 2 output versions available as standard:
  - 1 current output, 1 frequency/pulse output, 1 relay output, 1 digital input
  - 3 current outputs, 2 frequency/pulse outputs, 2 relay outputs, 1 digital input
- All outputs can be individually configured with mass, volume, density etc.
- 2 built-in totalizers which can count positive, negative or net
- Low flow cut-off
- Density cut-off or empty pipe cut-off, adjustable
- Flow direction
- Error system consisting of error-log, error pending menu
- Operating time
- Uni/bidirectional flow measurement
- Limit switches with 1 or 2 limits, programmable for flow, density or temperature
- Noise filter setting for optimization of measurement performance under non-ideal application conditions
- Full batch controller
- Automatic zero adjustment menu, with zero point evaluation feed-back
- Full service menu for effective and straight forward application and meter troubleshooting

#### Technical specifications

<b>Measurement of</b>	Mass flow [kg/s (lbs/min)], volume flow [l/s (gpm)], fraction [%], °Brix, density [kg/m <sup>3</sup> (lbs/ft <sup>3</sup> )], temperature [°C (°F)]
<b>Current output</b>	
Current	0 ... 20 mA or 4 ... 20 mA
Load	< 800 Ω
Time constant	0 ... 99.9 s adjustable
<b>Digital output</b>	
Frequency	0 ... 10 kHz, 50 % duty cycle
Time constant	0 ... 30 s adjustable
Active	24 V DC, 30 mA, 1 kΩ ≤ R <sub>load</sub> ≤ 10 kΩ, short-circuit-protected
Passive	3 ... 30 V DC, max. 110 mA, 1 kΩ ≤ R <sub>load</sub> ≤ 10 kΩ
<b>Relay</b>	
Type	Change-over relay
Load	42 V/2 A peak
Functions	Error level, error number, limit, direction
<b>Digital input</b>	11 ... 30 V DC
Functionality	Start/hold/continue batch, zero point adjust, reset totalizer 1/2, force output, freeze output
<b>Galvanic isolation</b>	All inputs and outputs are galvanically isolated, isolation voltage 500 V.
<b>Cut-off</b>	
Low-flow	0 ... 9.9 % of maximum flow

<b>Limit function</b>	Mass flow, volume flow, fraction, density, sensor temperature
<b>Totalizer</b>	Two eight-digit counters for forward, net or reverse flow
<b>Display</b>	<ul style="list-style-type: none"> <li>• Background illumination with alphanumeric text, 3 × 20 characters to indicate flow rate, totalized values, settings and faults</li> <li>• Reverse flow indicated by negative sign</li> </ul>
<b>Zero point adjustment</b>	Via keypad or remote via digital input
<b>Ambient temperature</b>	
Operation	-20 ... +50 °C (-4 ... +122 °F)
Storage	-40 ... +70 °C (-40 ... +158 °F) (Humidity max. 95 %)
<b>Communication</b>	Add-on modules: HART, PROFIBUS PA and DP, MODBUS RTU RS485, DeviceNet, FOUNDATION Fieldbus H1
<b>Enclosure 19"</b>	
Material	Aluminum/steel (DIN 41494)
Rating	IP20/NEMA 1 to IEC 529 and DIN 40050 (1 mH <sub>2</sub> O for 30 min.)
Mechanical load	18 ... 1000 Hz random, 3.17G rms, in all directions, to IEC 68-2-36
<b>Supply voltage</b>	<ul style="list-style-type: none"> <li>• 87 ... 253 V AC +10 % ... -10 %, 50 ... 60 Hz</li> <li>• 18 ... 30 V DC or 20 ... 30 V AC</li> </ul>
<b>Power consumption</b>	
230 V AC	9 VA max.
24 V DC	6 W I <sub>N</sub> = 250 mA, I <sub>ST</sub> = 2 A (30 ms)
<b>EMC performance</b>	
Emission	EN/IEC 61000-6-4 (Industry)
Immunity	EN/IEC 61000-6-2 (Industry)
<b>Ex approval</b>	[EEx ia] IIC, DEMKO 03 ATEX 135251X
<b>Maintenance</b>	The flowmeter has a built-in error log/pending menu which should be inspected on a regular basis.
<b>Fuse</b>	T 400 mA, T 250 V (IEC 127), not replaceable by operator
<b>Cable</b>	<ul style="list-style-type: none"> <li>• Max. 300 m</li> <li>• C: max. 300 [pF/m]; L<sub>C</sub>/R<sub>C</sub>: max. 100 [μH/Ω]</li> <li>• The total cable capacity must be max. 200 nF.</li> </ul>
<b>Cable glands</b>	The cable gland is available in polyamide, in dimension: PG 13.5

# Flow Measurement SITRANS F C

## Transmitter MASS 6000 for 19" insert/19" wall mounting

Selection and Ordering data	Order No.
<b>SITRANS F C MASS 6000 transmitter</b> Transmitter for rack and wall mounting, incl. connection board	<b>7 ME 4 1 1 0 -</b> 2 ■■■■ - ■■ A 0
<b>Enclosure</b> 19 inch insert IP20/NEMA 1 (rack) 19 inch insert in IP66/NEMA 4 (wall mounting)	<b>C</b> <b>E</b>
<b>Output configuration</b> 1 current, 1 frequency, 1 relay 3 current, 2 frequency, 2 relay	<b>A</b> <b>C</b>
<b>Supply voltage</b> 115/230 V AC, 50/60 Hz 24 V AC/DC	<b>1</b> <b>2</b>
<b>Ex Approvals</b> Standard (No Ex-approval) ATEX UL Class 1, Div. 2 (only IP66/NEMA 4 version)	<b>0</b> <b>1</b> <b>5</b>
<b>Display/Keypad</b> With display	<b>1</b>
<b>Serial communication</b> (Only possible to connect to MASS 6000 version with 1 current output) No communication	<b>A</b>
HART	<b>B</b>
PROFIBUS PA Profile 3	<b>F</b>
PROFIBUS DP Profile 3	<b>G</b>
MODBUS RTU RS485	<b>E</b>
DeviceNet	<b>H</b>
FOUNDATION Fieldbus H1	<b>J</b>

**Attention (Ex applications)!**

MC2 Ex version sensors must only be connected to MASS 6000 standard. The MASS 6000 connection board must be replaced by a connection board approved FDK-083H4294 or FDK-083H4295 (see connection boards/PCB for MASS 6000 and MC2 sensors).

Please also see [www.siemens.com/SITRANSFordering](http://www.siemens.com/SITRANSFordering) for practical examples of ordering

**Operating instructions for SITRANS F C MASS 6000 19"**

Description	Order No.
• English	<b>A5E02944875</b>

This device is shipped with a Quick Start guide and a CD containing further SITRANS F literature.


All literature is also available for free at:  
<http://www.siemens.com/flowdocumentation>

**Accessories**

Enclosure

Description	Order No.
Enclosure in ABS plastic for front panel mounting IP66/NEMA 4, for one 19" transmitter insert (21 TE)	<b>FDK-083F5030</b>
Enclosure in ABS plastic for front panel mounting IP66/NEMA 4, for two 19" transmitter inserts (42 TE)	<b>FDK-083F5031</b>
Enclosure in aluminum for back of panel mounting IP20/NEMA 1, for one 19" transmitter insert (21 TE)	<b>FDK-083F5032</b>

Description	Order No.
Enclosure in aluminum for back of panel mounting IP20/NEMA 1, for two 19" transmitter inserts (42 TE)	<b>FDK-083F5033</b>



Front cover (7 TE)	<b>FDK-083F4525</b>
--------------------	---------------------

Cable glands

Description	Order No.
<b>Cable glands, screwed entries type PG 13.5</b> in nickel-plated brass, 2 pcs.	<b>FDK-083G3140</b>
<b>Cable glands, screwed entries type PG 13.5</b> in polyamide (100 °C (212 °F)) black, 2 pcs.	<b>FDK-083G0228</b>



Add-on module

Note:  
Only possible to connect to MASS 6000 versions with 1 current output.

Description	Order No.
HART (Ex-i)	<b>FDK-085U0226</b>
PROFIBUS PA Profile 3 (Ex-i)	<b>FDK-085U0236</b>
PROFIBUS DP Profile 3	<b>FDK-085U0237</b>
MODBUS RTU RS485	<b>FDK-085U0234</b>
FOUNDATION Fieldbus H1 (Ex-i)	<b>A5E02054250</b>
DeviceNet	<b>FDK-085U0229</b>



**Operating instructions for SITRANS F add-on modules**

Description	Order No.
HART • English	<b>A5E03089708</b>
PROFIBUS PA/DP • English • German	<b>A5E00726137</b> <b>A5E01026429</b>
MODBUS • English • German • Spanish • French	<b>A5E00753974</b> <b>A5E03089262</b> <b>A5E03089278</b> <b>A5E03089265</b>
FOUNDATION Fieldbus • English • German • Spanish • French	<b>A5E02318728</b> <b>A5E02488856</b> <b>A5E02512177</b> <b>A5E02512169</b>
DeviceNet • English	<b>A5E03089720</b>


This device is shipped with a Quick Start guide and a CD containing further SITRANS F C literature.

# Flow Measurement


## SITRANS F C

### Transmitter MASS 6000 for 19" insert/19" wall mounting

#### Connection boards/PCB for MASS 6000 and MASS 2100 sensors

Description	Version	Order No.	
Connection board MASS 6000 for 19" IP20 rack mounting version	24 V 115/230 V	<b>FDK-083H4272</b>	
Connection board MASS 6000 EEx [ia] IIC for 19" IP20 rack mounting version	24 V 115/230 V	<b>FDK-083H4273</b>	
Connection board MASS 6000 for 19" wall mounting version, for enclosure FDK-083F5037/FDK-083F5038	24 V 115/230 V	<b>FDK-083H4274</b>	
Connection board MASS 6000 EEx [ia] IIC for 19" wall mounting version, for enclosure FDK-083F5037/FDK-083F5038	24 V 115/230 V	<b>FDK-083H4275</b>	

#### Connection boards/PCB for MASS 6000 and MC2 sensors

Description	Version	Order No.	
Connection board MASS 6000 for 19" IP20 rack mounting version	24 V 115/230 V	<b>FDK-083H4272</b>	
Connection board MASS 6000 for Ex application <sup>1)</sup> and 19" IP20 rack mounting version (connection board MASS 6000 to MC2 sensors Ex-approved)	24 V 115/230 V	<b>FDK-083H4294</b>	
Connection board MASS 6000 for 19" wall mounting version, for enclosure FDK-083F5037/FDK-083F5038	24 V 115/230 V	<b>FDK-083H4274</b>	
Connection board MASS 6000 for Ex application <sup>1)</sup> and 19" wall mounting version (connection board MASS 6000 to MC2 sensors Ex-approved), for enclosure FDK-083F5037/FDK-083F5038	24 V 115/230 V	<b>FDK-083H4295</b>	

<sup>1)</sup> Attention (Ex application): MC2 Ex version sensors must only be connected to connection board FDK-083H4294 or FDK-083H4295.

Description	Order No.	
Wall mounting enclosure for MASS 6000 19" version IP66/NEMA 4 (21 TE) with connection board/PCB for Ex application connected to MC2 Ex sensors	<b>FDK-083H4296</b>	


#### Spare parts 19" versions

##### Enclosure (without PCB, connection board)

Description	Order No.	
Enclosure in ABS plastic for wall mounting IP66/NEMA 4, for one 19" transmitter insert (21 TE), connection board not included	<b>FDK-083F5037</b>	
Enclosure in ABS plastic for wall mounting IP66/NEMA 4, for two 19" transmitter inserts (42 TE), connection board not included	<b>FDK-083F5038</b>	
Display for MASS 6000 19" insert/19" wall mounting. Order the Display and Keypad accessory from MASS 6000 IP67 compact/remote (FDK-085U1039) and use the display for replacement	<b>FDK-085U1039</b>	


**Dimensional drawings**

Transmitter 19" insert

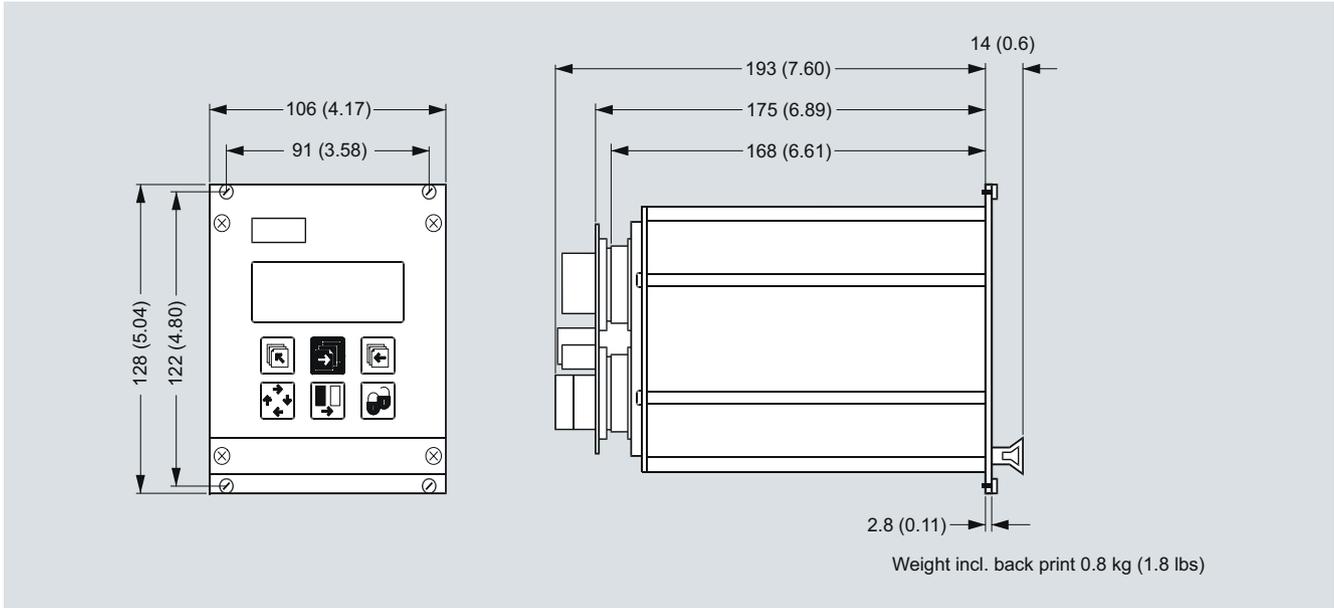

Dimensions in mm (inch)

Transmitter 19" wall mounting

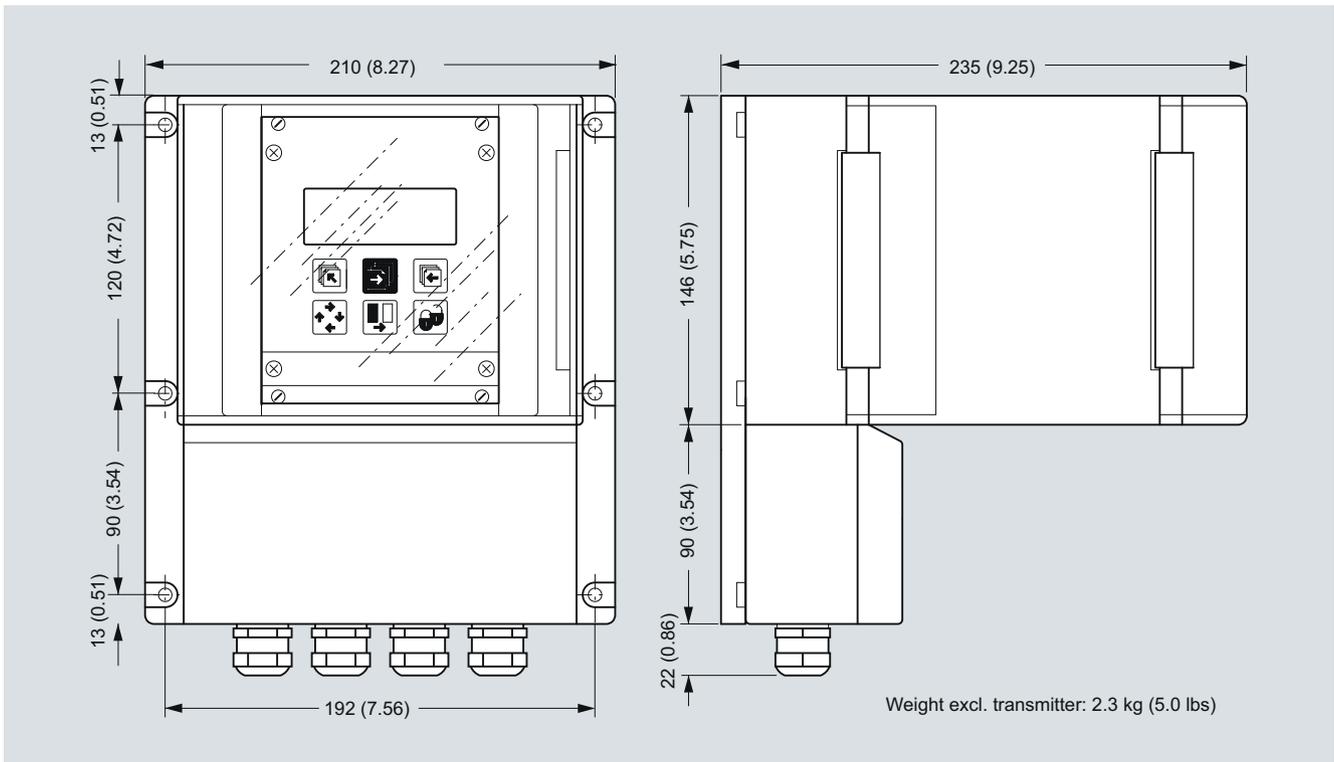


Dimensions in mm (inch)

# Flow Measurement SITRANS F C


**Transmitter MASS 6000  
for 19" insert/19" wall mounting**

Transmitter 19" front of panel

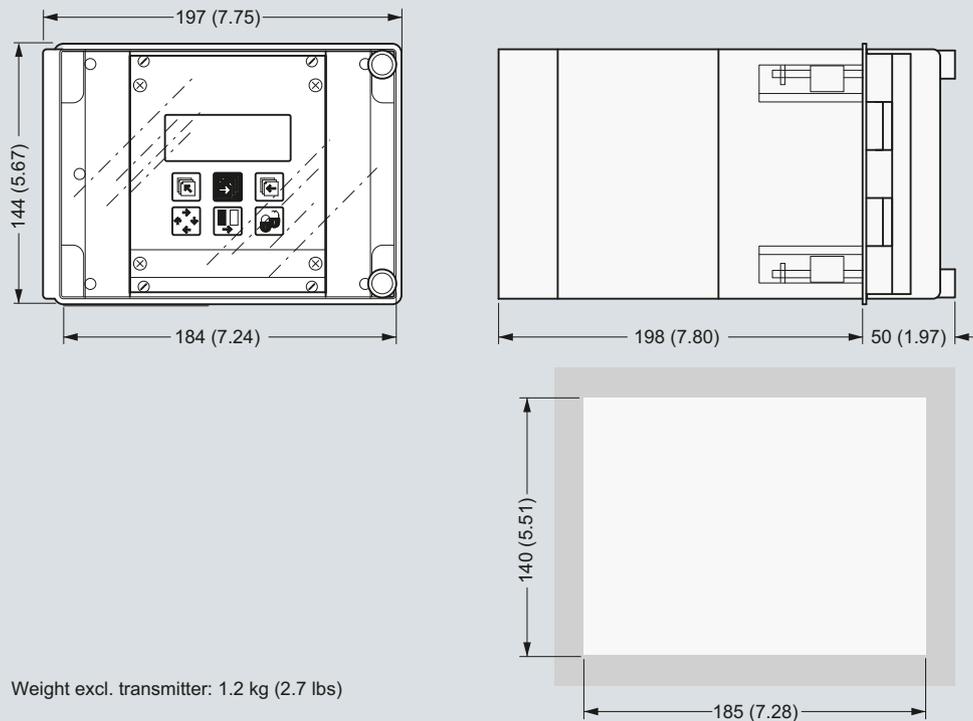


Dimensions in mm (inch)

Transmitter back of panel

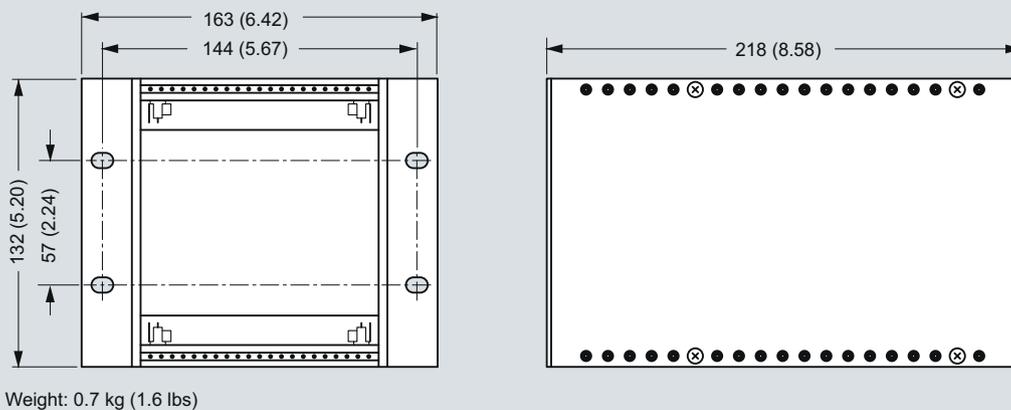

Dimensions in mm (inch)

Transmitter back of panel, 42 TE

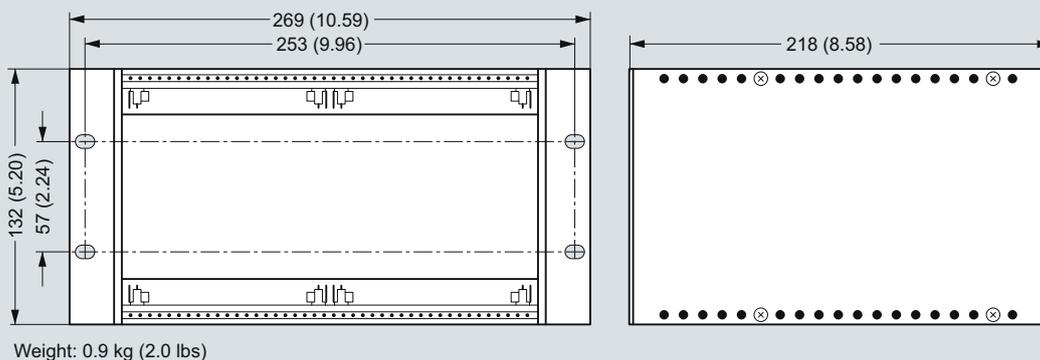

Dimensions in mm (inch)

### Schematics

#### Electrical connection

##### Grounding

PE must be connected due to safety class 1 power supply.

##### Mechanical counters

When mounting a mechanical counter to terminals 57 and 58 (active output), a 1000 µF capacitor must be connected to the terminals 56 and 58. Capacitor + is connected to terminal 56 and capacitor - to terminal 58.

##### Output cables

If long cables are used in noisy environment, it is recommended to use shielded cables.

