

Features

- Economical flow measurement in a compact transmitter
- No moving parts
- No pressure drop
- Wide rangeability with 150 to 1 turndown ratio
- Non-obstructive flow measurement
- Tolerance to dirty streams
- Low maintenance
- Suitable for high temperatures
- Two-path measurement available for maximum accuracy

Applications

The DigitalFlow XGM868 gas flow transmitter is a complete ultrasonic flow metering system for measurement of most gases including:

- Hydrocarbon gases
- Vent gases
- Biogases
- Digester gases
- Fuel gases
- Waste gases
- Incinerator air flow
- Vapor recovery
- Stack gases
- Other gases

DigitalFlow™ XGM868

Panometrics Gas Flow Ultrasonic Transmitter

DigitalFlow XGM868 is a Panometrics product. Panometrics has joined other GE high-technology sensing businesses under a new name—GE Industrial, Sensing.



GE Sensing

The DigitalFlow XGM868 gas ultrasonic flow transmitter is designed to measure the flow rate of virtually any gas. The DigitalFlow XGM868 flow transmitter offers a unique combination of rangeability, ease of installation, low maintenance and accuracy in a low-cost transmitter. The state-of-the-art XGM868 shares the many advantages offered by the other products in the GE line of innovative ultrasonic flowmeters. The all-digital XGM868 creates no pressure drop; has no moving parts or parts that foul or collect debris; seldom requires maintenance; and provides reliable, drift-free operation.

The flow rate can be displayed locally or transmitted to a remote system via an analog or digital communications link.

Compact Housing

All of the DigitalFlow XGM868's electronic components are housed in a compact transmitter package that can be installed right at the flow measurement point. This greatly simplifies wiring of the transducers and results in trouble-free operation.

Dual-Channel Model


In addition to the standard single-channel model, an optional two-channel model provides enhanced accuracy when measuring two paths on a single pipe. It can also be used to measure a single path on two pipes.

Low Operational Costs

Because the DigitalFlow XGM868 installation produces no flow obstruction, the energy-robbing pressure drops and high maintenance requirements characteristic of other flowmeters are eliminated. The special sealed metal transducers supplied with an DigitalFlow XGM868 system are immune to the erosion and stress caused by thermal expansion cycles.

Works Under Wide Range of Flow Conditions

Unlike limited conventional flowmeters, the DigitalFlow XGM868 transmitter can be used over a wide range of flow rates with any gas at pressures up to 3,480 psig (240 bar). Turndown ratio is 150 to 1.

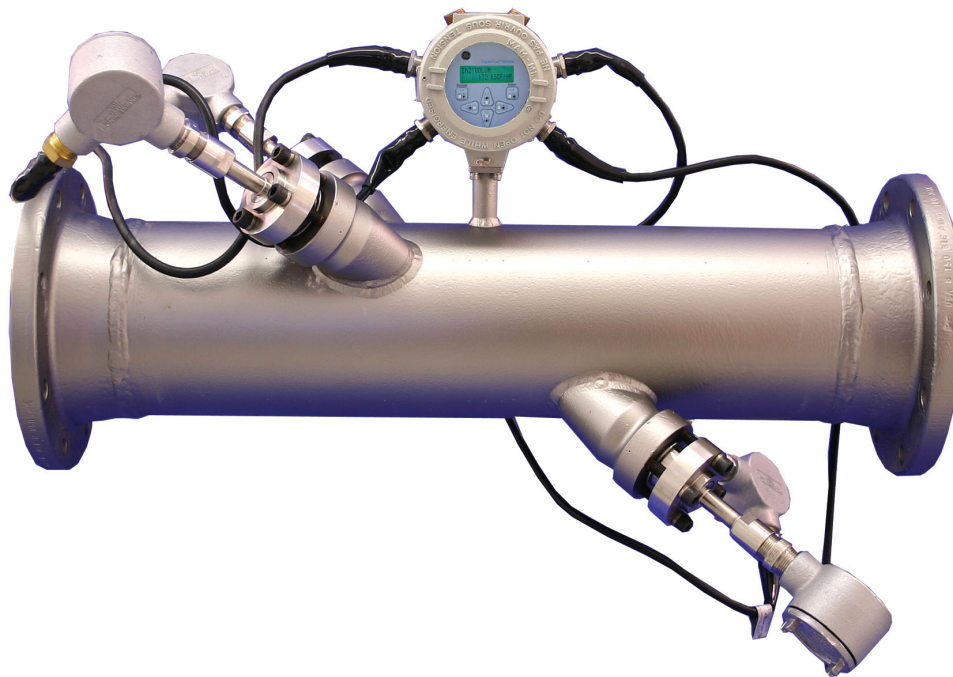

XGM868 Specifications

Operation and Performance

Fluid Types

Acoustically conductive gases

Pipe Sizes

2 to 120 in. NB (50 to 3,000 mm) and larger

Pipe Materials

All metals. Consult GE for other materials.

Flow Accuracy (Velocity)

±1% to 2% of reading typical

Accuracy depends on pipe size and whether measurement is one-path or two-path. Accuracy to ±0.5% of reading may be achievable with process calibration.

Repeatability

±0.2% to 0.5% of reading

Range (Bidirectional)

-150 ft/s to 150 ft/s (-46 m/s to 46 m/s)

Rangeability (Overall)

150:1

Specifications assume a fully developed flow profile (typically 20 diameters upstream and 10 diameters downstream of straight pipe run) and flow velocity greater than 3 ft/s (1 m/s).

Measurement Parameters


Mass flow, standard and actual flow, totalized flow, and flow velocity

Electronics

Flow Measurement

Transit time

Enclosures

- Standard: Epoxy-coated aluminum Type 4X/IP66 Class I, Division 1, Groups B,C&D Flameproof ISSeP 02ATEX008  II 2 GD EEx d IIC T5 IP66 T95°C
- Optional: Stainless steel

Dimensions (h x d)

Standard: Size 8.2 in x 6.6 in (208 mm x 168 mm), weight 10 lb (4.5 kg)

Channels

- Standard: One channel
- Optional: Two channels (for two pipes or two-path averaging)

Display

Optional: 2 line x 16 character backlit LCD display, configurable to display up to four measurement parameters in sequence

Keypad

Built-in infrared, six-button keypad for full functionality operation

Power Supplies

- Standard: 100 to 130 VAC, 50/60 Hz or 200 to 265 VAC, 50/60 Hz
- Optional: 12 to 28 VDC, ±5%

Power Consumption

20 W maximum

Operating Temperature

-40°F to 140°F (-40°C to 60°C)

Storage Temperature

-67°F to 167°F (-55°C to 75°C)

Standard Inputs/Outputs

Two 0/4 to 20 mA isolated outputs, 600 Ω maximum load

Optional Inputs/Outputs

All analog and digital I/O are available in specific combinations. Consult GE for available option cards.

- Two additional 0/4 to 20 mA isolated outputs, 1000 Ω maximum load
- Two 4 to 20 mA isolated inputs, 24 VDC loop power

XGM868 Specifications

- Two or four isolated, three-wire RTD (temperature) inputs, -148°F to 662°F (-100°C to 350°C), 100 Ω platinum
- Two or four pulse or frequency outputs, optically isolated, 3 A maximum, 100 VDC maximum, 1 W maximum, from DC to 10 KHz maximum
- Alarm relays:
 - Two or four Form C relays; 120 VAC, 28 VDC maximum, 5 A maximum; DC 30 W maximum, AC 60 VA maximum

Digital Interfaces

- Standard: RS232
- Optional: RS485 (multiuser)
- Optional Hart[®] protocol
- Optional: Modbus[®] protocol

Data Logging

- Standard: None
- Optional: Memory capacity (linear and/or circular type) to log over 150,000 flow data points

European Compliance

System complies with EMC Directive 89/336/EEC, 73/23/EEC LVD (Installation Category II, Pollution Degree 2) and transducers comply with PED 97/23/EC for DN < 25

Wetted Ultrasonic Flow Transducers

Temperature Range

- Standard: -58°F to 302°F (-50°C to 150°C)
- Optional (overall): -310°F to 842°F (-190°C to 450°C)

Pressure Range

- Standard: 0 psig to 2700 psig (1 bar to 187 bar)
- Optional: 3480 psig (240 bar) maximum

Materials

- Standard: Titanium
- Optional: Monel[®] or Hastelloy[®] alloys


Process Connections

Flanged and compression fittings

Mountings

Flowcell or cold tap

Area Classifications

- Standard: General purpose
- Optional: Weatherproof Type 4X/IP66
- Optional: Explosion-proof Class I, Division 1, Groups B,C,&D
- Optional: Flameproof  II 2 GD EEx d IIC T6

Transducers and flowcells for specific applications are available. Consult GE for details.

Transducer Cables

- Standard: One pair of coaxial cables, type RG62 AU, or as specified for transducer type
- Optional: Lengths up to 1000 ft (330 m) maximum

High Temperature and High Pressure Ultrasonic Flow Transducers

Bundle Waveguide Technology[™] (BWT) System transducer and holder (see BWT System specifications) are available.

©2004 GE. All rights reserved.
920-003B



All specifications are subject to change for product improvement without notice. DigitalFlow[™], Bundle Waveguide Technology[™], BWT[™] and PanaView[™] are trademarks or registered trademarks of GE. GE[®] is a registered trademark of General Electric Co. Windows[®] is a registered trademark of Microsoft Corporation, which is not affiliated with GE, in the U.S. and other countries. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.

