

### Overview



SITRANS F X vortex flowmeters provide accurate volumetric and mass flow measurement of steam, gases and liquids as an all-in-one solution with integrated temperature and pressure compensation.

### Benefits

- All devices have 2-wire technology and HART communication
- Temperature compensation for saturated steam as standard feature
- Integrated temperature and pressure measurement enabling direct compensation of density
- Pressure, temperature and flow can be read at a single point. No additional installation of pressure and temperature sensors
- Direct measurement of energy or energy consumption
- Optimum process reliability thanks to Intelligent Signal Processing (ISP) - stable readings, free of external perturbations
- Fully welded stainless steel construction with high corrosion, pressure and temperature resistance
- Maintenance-free sensor design
- Ready to use due to plug & play feature. No additional cabling work
- Minimal pressure drop
- Pressure and temperature compensation for fluctuating volume flows
- Measurement of consumption in compressed air systems
- No risk of deposits or damage (sensor in the turbulent area)
- All units parameterized prior to delivery








### Application

The SITRANS FX300 is a compact flowmeter in a single or dual transmitter version, suitable for measuring industrial steam, gases, as well as conductive and non-conductive liquids. E.g. steam (saturated steam, superheated steam), industrial gases (compressed air, nitrogen, liquefied gases, flue gases), and conductive and non-conductive liquids (demineralized water, boiler feed water, solvents, heat transfer oil).

The main applications of SITRANS FX300 can be found in the following sectors:

- Chemical
- Petrochemical
- Oil & Gas
- Power plants
  - Air
  - Heating
  - Cooling
  - Chilling
- Food & beverage
  - Pharmaceutical
  - Sugar refineries
  - Dairies
  - Breweries
  - Production of soft drinks
- Refining
- Water & waste water

### System Overview

Version	Single transmitter			Dual transmitter
	Standard	Pressure sensor	Pressure sensor and isolation valve	
Options				Standard
Flange				
Sandwich				

### Function

#### Operating Principle


SITRANS F X vortex flowmeters measure flow rate by detecting the frequency at which alternating vortices are shed from a bluff body inserted into the flow stream. This principle of measurement is known as Von Karman's vortex street principle: alternating vortices form behind an object in a stream. The frequency of the alternating vortices is proportional to the flow rate.

The passage of a vortex causes a slight stress on a pick-up placed downstream of the bluff body. The stress is picked up and counted as pressure surges by a dual Piezo crystal placed inside the wing.

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300

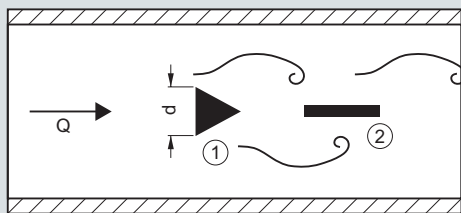

① = Bluff Body, ② = Pick-up

The flowmeter calculates the flow velocity using the following equation:

$$Q = A \cdot V = A \cdot d / St \cdot f = 101,93 \cdot f / K \text{ [m}^3\text{/h]}$$

Where:

Q = flow rate [m<sup>3</sup>/h]

f = vortex shedding frequency [Hz]

K = calibration constant [pulses/m<sup>3</sup>]

d = width of the bluff body [m]

St = Strouhal Number

A = cross-section area [m<sup>2</sup>]

V = flow velocity [m/s]

#### Requirements

In order to generate the vortex streets, the medium must have a minimum velocity:

- For steam and gases, the flow velocity must be 2 to 80 m/s (6.6 to 262 ft/s)
- For liquids the flow velocity must be 0.4 to 10 m/s (1.3 to 32.8 ft/s)

#### Design

SITRANS FX300 volumetric and mass flowmeter is available in the following configurations:

##### SITRANS FX300 Single transmitter

The single transmitter is available as a flange or sandwich solution in the following versions:

- Vortex standard flowmeter  
Measurement with integrated temperature sensor as standard feature
- Vortex flowmeter with pressure sensor  
Measurement with integrated temperature and pressure sensors for compensation of gases, wet gases, gas mixtures or steam (for energy measurement).
- Vortex flowmeter with pressure sensor and isolation valve  
Allowing the pressure sensor to be shut off for the purpose of pressure or leak testing of the pipeline or for being exchanged without interrupting the process. Using the built-in two-way valve, the pressure sensor can also be calibrated and tested at a later time.

##### SITRANS FX300 Dual transmitter

This is a genuine redundant system with two independent sensors and two converters providing twofold functional reliability and availability of the measurement. This variant is optimally suited for measurements in multi-product pipelines.

The dual converter is available as:

- Vortex standard flowmeter  
Measurement with temperature sensor for saturated steam compensation as standard feature

#### Technical specifications

<b>Input</b>	
Measuring range limits	See „Dimensional Drawings“
Media pressure	1 ... 100 bar (Higher pressures on request)
<b>Output</b>	
Current output	
• Measuring range	4 ... 20 mA
• Over range	20.8 mA ± 1 % (105 % ± 1 %)
• Load	
- min.	100 Ω
- max.	$R_{\max} = (U_{\text{Power Supply}} - 14 \text{ V}) / 22 \text{ mA}$
• Error signal	NAMUR NE 43
• Maximum output	22 mA (112.5 %)
• Multidrop mode	4 mA
Digital output	
• Communication	HART
• Physical layer	FSK
• Device category	Transmitter
<b>Pulse Output</b> (Passive pulse output, needs separate power supply. Pulse output has to be defined in the Option menu Y47 totalizer or energy unit has to be entered. E.g.: 1 pulse/kg or 1 pulse/10 m <sup>3</sup> )	
• Pulse frequency	Max. 0.5 Hz
• Power supply	Min. 24 V DC as NAMUR or
• Non-Ex version	open < 1 mA, max. 36 V, closed 100 mA, $U < 2 \text{ V}$
• Ex version	open < 1 mA, max. 30 V, closed 100 mA, $U < 2 \text{ V}$
<b>Accuracy</b>	
Standard version	
• For liquids	
- Re ≥ 20 000	± 0.75 %
• For steam and gases	
- Re ≥ 20 000	± 1 %
• For steam, gases and liquids	
- 10 000 < Re < 20 000	± 2 %
Pressure and temperature-compensated version	
• For liquids	
- 10 000 < Re < 20 000	± 2 %
- Re ≥ 20 000	± 0.75 %
• For gases and steam	
- 10 000 < Re < 20 000	± 2.5 %
- Re ≥ 20 000	± 1.5 %
Repeatability	± 0,1 %
<b>Installation conditions</b> (At different conditions, e.g. installation after control valve, bends or reductions, please refer to the operating instructions.)	
• Inlet run	≥ 20 × DN
• Outlet run	≥ 5 × DN

<b>Software</b>	
Uncompensated for gases, steam and liquids, but temperature-compensated for saturated steam	Order option 1
Density-compensated by temperature and pressure for superheated steam, no energy calculation	Order option 4
Gross heat	
When the device has to operate as an energy calculation device	Order option 5
In options Y51 to Y56 add information regarding:	<ul style="list-style-type: none"> <li>• Y51 Variable current output</li> <li>• Y52 Power unit Select one of the following units from power units table in Y52: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom)</li> <li>• Y53 Fullscale power value</li> <li>• Y54 Variable pulse output</li> <li>• Y55 Totalizer on/off</li> <li>• Y56 Configures for totalizer select one of the following units from energy units table in Y56: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom).</li> </ul>
Gases and wet gases	Order option 7
Wet gases	Select Y49 and enter relative humidity in %
FAD - Free Air Delivery	
When the device has to operate close to a compressor	Order option 8
In Y81 to Y87 add information regarding:	<ul style="list-style-type: none"> <li>• Y81 Inlet suction temperature</li> <li>• Y82 Atmosphere pressure</li> <li>• Y83 Pressure drop filter</li> <li>• Y84 Inlet relative humidity</li> <li>• Y85 Actual revolutions per minute (of compressor)</li> <li>• Y86 Rated rpm of compressor</li> <li>• Y87 Outlet relative humidity. This information is available from compressor supplier.</li> </ul>
Mixed gases	When the fluid is a gas mixture, make an SDR request (sheet available on intranet) and fill in gas names and amount in %
<b>Rated operation conditions</b>	
Ambient temperature	
• Non-Ex version	-40 ... +85 °C (-40 ... +185 °F)
• Ex version	-40 ... +65 °C (-40 ... +149 °F)
Storage temperature	-50 ... +85 °C (-58 ... +185 °F)
Media temperature	-40 ... +240 °C (-40 ... +464 °F)
Density	Taken into consideration when rating
Viscosity	< 10 cP
Reynolds number	10 000 ... 2 300 000
Media pressure limit	Max. 100 bar (Higher pressure on request. Make an SDR request, sheet available on intranet)

<b>Design</b>	
Material	
• Sensor: house/pick-up	1.4404(316L)/1.4435(316L) Hastelloy C22 available (make an SDR request, sheet available on intranet)
• Housing: transmitter	Aluminium for increased requirements
• Sensor gaskets: for pick-up and pressure sensor	1.4435(316L)/FPM or FFKM  FPM (Viton®) by steam and non-aggressive gases. FFKM (Kalrez®) by chlorine and other aggressive gases (only available together with a pressure sensor).
Process connections	Flange norm EN 1092-1 form B1/B2 or ASME B16.5 RF.  Other flanges on request. Make an SDR request, sheet available on intranet
• Flange version	DN 15 ... 300 (½ ... 12")
• Sandwich version	DN 15 ... 100 (½ ... 4")
Degree of protection	IP66/IP67
Dimensions and weights	See „Dimensional Drawings“
<b>Display and operating interface</b>	
Local display	2 lines, 10 characters per line
Languages	German, English, French
<b>Power supply</b>	
• Standard version	14 ... 36 V DC
• Ex version	14 ... 30 V DC
<b>Certificates and approvals</b>	
Explosion protection	
• ATEX	II 2G EEx d ia [ia] IIC T6
• FM US/C	Class I, II, III, Div 1 & 2
<b>Calibration</b>	
	All flowmeters will be delivered with a 3 point calibration certificate
<b>Material Certificate</b>	
	Certificate of compliance, pressure test, material certificate, material in acc. of NACE and PMI of pressure bearing metal parts.
<b>Cleaning</b>	
	Choice Cleaning Class 1 when fluid is oxygen or contains chloride.
<b>Certificates</b>	
	X-ray test on pressurized weldings and dye penetration test on pressure bearing weldings  Dye penetration test

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300

#### Selection and Ordering data

**SITRANS FX300 Flanged**  
Single transmitter and  $T_{max} = 240\text{ °C (464 °F)}$

Order No.

7 ME 2 6 0 0 -

#### Connection size

#### Sensor size

DN 15 (½")	DN 15
DN 25 (1")	DN 25
DN 40 (1½")	DN 40
DN 50 (2")	DN 50
DN 80 (3")	DN 80
DN 100 (4")	DN 100
DN 150 (6")	DN 150
DN 200 (8")	DN 200
DN 250 (10")	DN 250
DN 300 (12")	DN 300

1 A  
2 B  
2 K  
2 R  
3 L  
3 S  
4 M  
4 T  
4 W  
5 E

#### Flange norm and nominal pressure

#### Form B1/B2

#### EN 1092-1

PN 10	DN 200 ... 300
PN 16	DN 50 ... 300
PN 25	DN 200 ... 300
PN 40	DN 15 ... 300
PN 63	DN 50 ... 150
PN 100	DN 15 ... 150

#### RF

#### ASME B16.5

150 lb	½ ... 12"
300 lb	½ ... 12"
600 lb	½ ... 6"

A  
B  
C  
D  
E  
F  
J  
K  
L

#### Sensor material/Gasket

Stainless steel 1.4404 (316L)/1.4435 (316L)/FPM  
Stainless steel 1.4404 (316L)/1.4435 (316L)/FFKM

1  
5

#### Transmitter design

Compact, none cable

1

#### Approval and cable gland

Non Ex, M20x1,5  
Non Ex, ½" NPT  
ATEX, M20x1,5  
ATEX, ½" NPT  
FM US/C, M20x1.5  
FM US/C, ½" NPT

1  
2  
4  
5  
6  
7

#### Transmitter, display and communication

With display, HART

A

#### Pressure sensor and isolation valve

Without pressure sensor  
With pressure sensor, range:  
4 bar  
6 bar  
10 bar  
16 bar  
25 bar  
40 bar  
60 bar  
100 bar  
With isolation valve and pressure sensor, range:  
4 bar  
6 bar  
10 bar  
16 bar  
25 bar  
40 bar  
60 bar  
100 bar

A  
B  
D  
E  
G  
H  
K  
L  
N  
P  
Q  
R  
S  
U  
V  
W  
Y

#### Selection and Ordering data

**SITRANS FX300 Flanged**  
Single transmitter and  $T_{max} = 240\text{ °C (464 °F)}$

Order No.

7 ME 2 6 0 0 -

#### Software

Uncompensated for gases, wet gases, steam and liquids, respectively, temperature compensation for saturated steam  
Density compensation for superheated steam  
Density compensation for superheated steam and setting of Gross heat Opt. Y51 ... Y56 for Energy measuring  
Density compensation for gases and wet gases and setting of Relative humidity at opt. Y49  
Density compensation for gases, wet gases and setting of FAD - free air delivery Opt. Y49 and Y81 ... Y87 for Compressor settings

1  
4  
5  
7  
8

#### Selection and Ordering data

Order code

#### Further designs

Please add "-Z" to Order No. and specify Order code.

#### Converter housing material

Aluminium for increased requirement, color: petrol green

A10

#### Material certificate

Certificate of compliance EN 10204-2.1  
Pressure test + 3.1 accordance EN 10204  
Material certificate pressure parts + certificate 3.1  
Material in accordance with NACE MR 0175-01  
PMI of pressure bearing metal parts + certificate 3.1  
Material certificate pressure parts + PMI/certificate 3.1

C10  
C11  
C12  
C13  
C14  
C15

#### Calibration certificate FX300

As standard the flow device has a 3-point calibration certificate.

Calibration certificate (5 point)

D11

#### Hardness test

Hardness test on pressure bearing parts + 3.1  
Equotip LD procedure according to NACE MR 0175-01

H30

#### Cleaning for oil and fat

Class 1 increased requirement (customer-specified) and 3.1 (EN 10204)

K46

Class 2 and 3.1 (EN 10204)

K48

#### Certificates

X-ray test on ppressure bearing weldings  
Dye penetration test on pressure bearing weldings

M56  
M58

#### Tag name plate

Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text)

Y17

Stainless steel tag with 2,5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text)

Y18

Selection and Ordering data	Order code
<b>Additional data</b>	
Please add "-Z" to Order No. and specify Order code and plain text.	
<b>Input process data</b>	
Medium: Specify steam, gas, liquid or customised	<b>Y40</b>
Temperature: Specify max. operating temperature and units	<b>Y41</b>
Pressure: Specify max. operating pressure and units	<b>Y42</b>
Density; (only by customized medium): Specify medium density and units	<b>Y43</b>
Viscosity; (only by customized medium): Specify medium viscosity and units	<b>Y44</b>
Flow rate: Specify min./max. flow rate and units	<b>Y45</b>
Setting of pulse output: Specify totalizer or energy unit (1 pulse/unit)	<b>Y47</b>
Relative humidity (amount in %)	<b>Y49</b>
<b>Settings of gross heat</b>	
Variable current output	<b>Y51</b>
Power unit (specify: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special(custom))	<b>Y52</b>
Fullscale power value	<b>Y53</b>
Variable pulse output	<b>Y54</b>
Totalizer on/off	<b>Y55</b>
Configure totalizer (specify: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special(custom))	<b>Y56</b>
<b>Settings of FAD</b>	
Inlet suction temperature	<b>Y81</b>
Atmosphere pressure	<b>Y82</b>
Pressure drop filter	<b>Y83</b>
Inlet relative humidity	<b>Y84</b>
Actual revolutions per minute (of compressor)	<b>Y85</b>
Rated Rpm of compressor	<b>Y86</b>
Outlet relative humidity This information is available from compressor supplier.	<b>Y87</b>

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300

Selection and Ordering data		Order No.
<b>SITRANS FX300 Sandwich</b>		7ME2700-
<b>Single transmitter and T<sub>max</sub> = 240 °C (464 °F)</b>		
<b>Connection size</b>	<b>Sensor size</b>	
DN 15 (½")	DN 15	1 A
DN 25 (1")	DN 25	2 B
DN 40 (1½")	DN 40	2 K
DN 50 (2")	DN 50	2 R
DN 80 (3")	DN 80	3 L
DN 100 (4")	DN 100	3 S
<b>Nominal pressure</b>		
<b>EN</b>		
PN 16	DN 50 ... 100	B
PN 40	DN 15 ... 100	D
PN 63	DN 50 ... 100	E
PN 100	DN 15 ... 100	F
<b>ASME</b>		
150 lb	½ ... 4"	J
300 lb	½ ... 4"	K
600 lb	½ ... 4"	L
<b>Sensor material/Gasket</b>		
Stainless steel 1.4404 (316L)/1.4435 (316L)/FPM		1
Stainless steel 1.4404 (316L)/1.4435 (316L)/FFKM		5
<b>Transmitter design</b>		
Compact, no cable		1
<b>Approval and cable gland</b>		
Non Ex, M20x1,5		1
Non Ex, ½" NPT		2
ATEX, M20x1,5		4
ATEX, ½" NPT		5
FM US/C, M20x1.5		6
FM US/C, ½" NPT		7
<b>Transmitter, display and communication</b>		
With display, HART		A
<b>Pressure sensor and isolation valve</b>		
Without pressure sensor		A
With pressure sensor, range:		
4 bar		B
6 bar		D
10 bar		E
16 bar		G
25 bar		H
40 bar		K
60 bar		L
100 bar		N
With isolation valve and pressure sensor, range:		
4 bar		P
6 bar		Q
10 bar		R
16 bar		S
25 bar		U
40 bar		V
60 bar		W
100 bar		Y
<b>Software</b>		
Uncompensated for gases, wet gases, steam and liquids respectively temperature compensation for saturated steam		1
Density compensation for superheated steam		4
Density compensation for superheated steam and setting of Gross heat Opt. Y51 ... Y56 for Energy measuring		5
Density compensation for gases and wet gases and setting of Relative humidity at opt. Y49		7
Density compensation for gases, wet gases and setting of FAD - free air delivery Opt. Y49 and Y81 ... Y87 for Compressor settings		8

Selection and Ordering data	Order code
<b>Further designs</b>	
Please add "-Z" to Order No. and specify Order code.	
<b>Converter housing material</b>	
Aluminium for increased requirement, color: petrol green	<b>A10</b>
<b>Material certificate</b>	
Certificate of compliance EN 10204-2.1	<b>C10</b>
Pressure test + 3.1 accordance EN 10204	<b>C11</b>
Material certificate pressure parts + certificate 3.1	<b>C12</b>
Material in accordance with NACE MR 0175-01	<b>C13</b>
PMI of pressure bearing metal parts + certificate 3.1	<b>C14</b>
Material certificate pressure parts + PMI/certificate 3.1	<b>C15</b>
<b>Calibration certificate FX300</b>	
As standard the flow device has a 3-point calibration certificate.	
Calibration certificate (5-point)	<b>D11</b>
<b>Hardness test</b>	
Hardness test on pressure bearing parts + 3.1 Equotip LD procedure according to NACE MR 0175-01	<b>H30</b>
<b>Cleaning for oil and fat</b>	
Class 1 increased requirement (customer-specified) and 3.1 (EN 10204)	<b>K46</b>
Class 2 and 3.1 (EN 10204)	<b>K48</b>
<b>Certificates</b>	
X-ray test on pressure bearing weldings	<b>M56</b>
Dye penetration test on pressure bearing weldings	<b>M58</b>
<b>Tag name plate</b>	
Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text)	<b>Y17</b>
Stainless steel tag with 2,5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text)	<b>Y18</b>

Selection and Ordering data	Order code
<b>Additional data</b>	
Please add "-Z" to Order No. and specify Order code and plain text.	
<b>Input process data</b>	
Medium: Specify steam, gas, liquid and customised	<b>Y40</b>
Temperature: Specify max. operating temperature and units	<b>Y41</b>
Pressure: Specify max. operating pressure and units	<b>Y42</b>
Density: (only by customized medium): Specify medium density and units	<b>Y43</b>
Viscosity: (only by customized medium): Specify medium viscosity and units	<b>Y44</b>
Flow rate: Specify min./max. flow rate and units	<b>Y45</b>
Setting of pulse output: Specify totalizer or energy unit (1 pulse/unit)	<b>Y47</b>
Relative humidity (amount in %)	<b>Y49</b>
<b>Settings of gross heat</b>	
Variable current output	<b>Y51</b>
Power unit (specify: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special(custom))	<b>Y52</b>
Fullscale power value	<b>Y53</b>
Variable pulse output	<b>Y54</b>
Totalizer on/off	<b>Y55</b>
Configure totalizer (specify: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special(custom))	<b>Y56</b>
<b>Settings of FAD</b>	
Inlet suction temperature	<b>Y81</b>
Atmosphere pressure	<b>Y82</b>
Pressure drop filter	<b>Y83</b>
Inlet relative humidity	<b>Y84</b>
Actual revolutions per minute (of compressor)	<b>Y85</b>
Rated Rpm of compressor	<b>Y86</b>
Outlet relative humidity	<b>Y87</b>
This information is available from compressor supplier.	

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300

#### Selection and Ordering data

Order No.

**SITRANS FX300 Flanged  
Dual transmitter and  $T_{\max} = 240\text{ °C (464 °F)}$** 

7 ME 2 8 0 0 -

#### Connection size

#### Sensor size

DN 40 (1½")	DN 40
DN 50 (2")	DN 50
DN 80 (3")	DN 80
DN 100 (4")	DN 100
DN 150 (6")	DN 150
DN 200 (8")	DN 200
DN 250 (10")	DN 250
DN 300 (12")	DN 300

 2 K  
 2 R  
 3 L  
 3 S  
 4 M  
 4 T  
 4 W  
 5 E

#### Flange norm and nominal pressure

#### Form B1/B2

#### EN 1092-1

PN 10	DN 200 ... 300
PN 16	DN 50 ... 300
PN 25	DN 200 ... 300
PN 40	DN 40 ... 300
PN 63	DN 50 ... 150
PN 100	DN 40 ... 150

 A  
 B  
 C  
 D  
 E  
 F

#### RF

#### ASME B16.5

150 lb	1½ ... 12"
300 lb	1½ ... 12"
600 lb	1½ ... 6"

 J  
 K  
 L

#### Sensor material/Gasket

 Stainless steel 1.4404 (316L)/1.4435 (316L)/FPM  
 Stainless steel 1.4404 (316L)/1.4435 (316L)/FFKM

 1  
 5

#### Transmitter design

Compact, no cable

1

#### Approval and cable gland

 Non Ex, M20x1,5  
 Non Ex, ½" NPT  
 ATEX, M20x1,5  
 ATEX, ½" NPT  
 FM US/C, M20x1.5  
 FM US/C, ½" NPT

 1  
 2  
 4  
 5  
 6  
 7

#### Transmitter, display and communication

With display, HART

A

#### Pressure sensor and isolation valve

Without pressure sensor

A

#### Software

 Uncompensated for gases, wet gases, steam and  
 liquids respectively temperature compensation for  
 saturated steam

1

#### Selection and Ordering data

Order code

#### Further designs

Please add "-Z" to Order No. and specify Order code.

#### Converter housing material

Aluminium for increased requirement,  
color: petrol green

A10

#### Material certificate

Certificate of compliance EN 10204-2.1

C10

Pressure test + 3.1 accordance EN 10204

C11

Material certificate pressure parts + certificate 3.1

C12

Material in accordance with NACE MR 0175-01

C13

PMI of pressure bearing metal parts + certificate 3.1

C14

Material certificate pressure parts + PMI/certificate 3.1

C15

#### Calibration certificate FX300

As standard the flow device has a 3-point calibration  
certificate.

Calibration certificate (5-point)

D11

#### Hardness test

Hardness test on pressure bearing parts + 3.1  
Equotip LD procedure according to NACE MR 0175-01

H30

#### Cleaning for oil and fat

Class 1 increased requirement (customer-specified)  
and 3.1 (EN 10204)

K46

Class 2 and 3.1 (EN 10204)

K48

#### Certificates

X-ray test on pressure bearing weldings

M56

Dye penetration test on pressure bearing weldings

M58

#### Tag name plate

Stainless steel tag with 3 mm characters, max. 2 x 8  
characters (40 x 20 mm, add plain text)

Y17

Stainless steel tag with 2,5 mm characters, max. 8 x 40  
characters (120 x 46 mm, add plain text)

Y18

#### Additional data

Please add "-Z" to Order No. and specify Order code  
and plain text.

#### Input process data

Medium: Specify steam, gas, liquid and customised

Y40

Temperature: Specify max. operating temperature and  
units

Y41

Pressure: Specify max. operating pressure and units

Y42

Density; (only by customized medium): Specify medium  
density and units

Y43

Viscosity; (only by customized medium):  
Specify medium viscosity and units

Y44

Flow rate: Specify min./max. flow rate and units

Y45

Setting of pulse output;  
Specify totalizer or energy unit (1 pulse/unit)





Y47

Relative humidity (amount in %)

Y49



## Accessories or spare parts for SITRANS FX300

Description	Order No.	
Seal disc 21,8-12-0,1	A5E02181439	
Socket only for DN 15/25 ; 1/2"	On request	
Socket only for DN 15/25 ; 1"	On request	
Pickup 1.4404	On request	
O-ring pickup	A5E02181464	
O-ring for pressure screw 17,13 x 2,62-FPM-70	A5E02181488	
Pressure sensor 4/6/10/16/25/40/60/100 bar	On request	
Cover gasket O-Ring 91.67 x 3.5	A5E02181492	
Converter housing gasket 59,35,5-2-N	A5E02181495	
O-ring DIN3771-20 x 1-FPM for sensor	A5E02181515	
O-ring 10x2-NBR for lead- through	A5E02181525	
DUBOX plug, 5-pole-RM2	A5E02181527	
Electronic		
• Basic D-HART	A5E02181531	
• Steam D-HART	A5E02181541	
• Gas D-HART	A5E02181544	
Display	A5E02181558	
Cable feedthrough 10-pole (non Ex). O-ring for cable feedthrough 21,89 x 2,62 10-pole plug	A5E02181562	
Sensor replacement (incl. Seal disc, pickup, O-rings for pickup, and pressure screw		
• DN 15 (incl. 1/2" socket)	A5E02181087	
• DN 25 (incl. 1" socket)	A5E02181116	
• DN 40 ... 100	A5E02181152	
• DN 150 ... 300	A5E02275105 <sup>F)</sup>	
Pressure sensor replacement (Incl. pressure sensor, DUBOX plug, 2 O-rings and calibration certificate)		
• 4 bar (58 psi)	A5E02181157	
• 6 bar (87 psi)	A5E02181175	
• 10 bar (145 psi)	A5E02181180	
• 16 bar (232 psi)	A5E02181221	
• 25 bar (363 psi)	A5E02181307	
• 40 bar (580 psi)	A5E02181316	
• 60 bar (870 psi)	A5E02181322	
• 100 bar (1450 psi)	A5E02181437	

## Description


Service Toolbox for changing software (basic, steam and gas) and different settings in the electronic.

## Order No.


A5E02375819



## Schematics

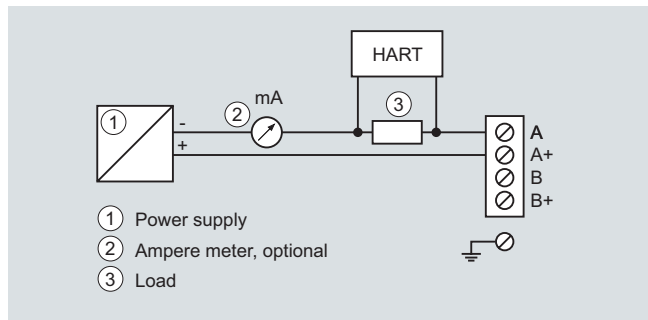

Load for HART communication

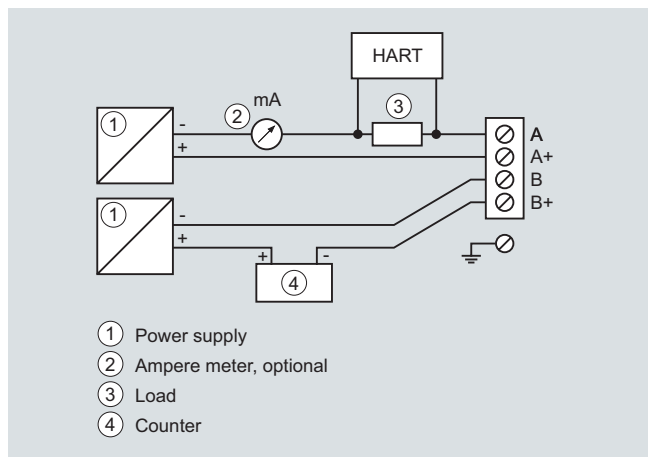

Connection pulse output

F) Subject to export regulations AL: 91999, ECCN: N.


# SITRANS F flowmeters

## SITRANS F X


### SITRANS FX300

#### Dimensional drawings


4

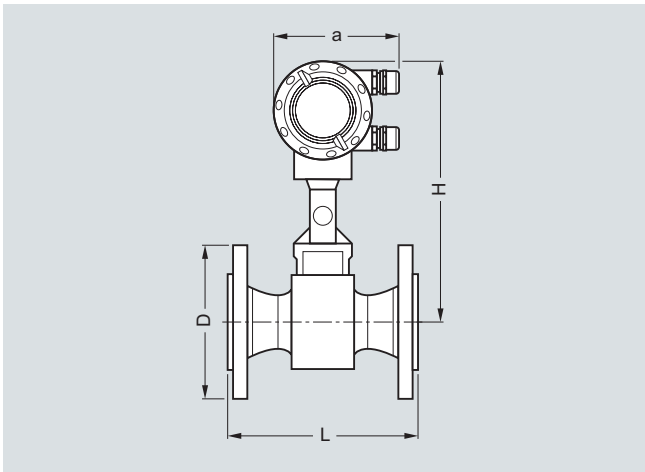


Flange version, frontal view, a = 133 mm (5.24 inches)

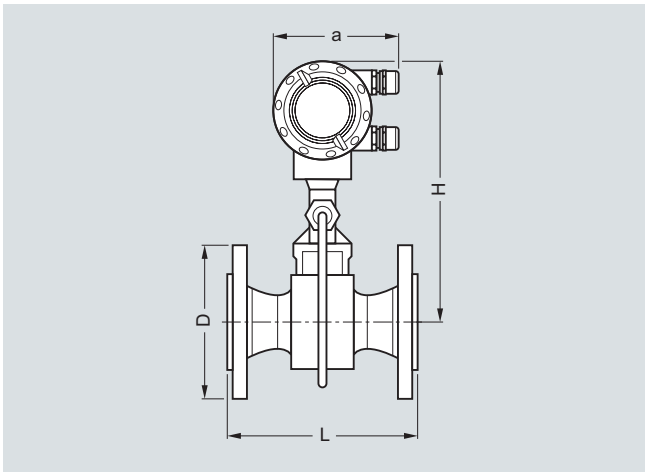


Flange version, frontal view, a = 133 mm (5.24 inches)

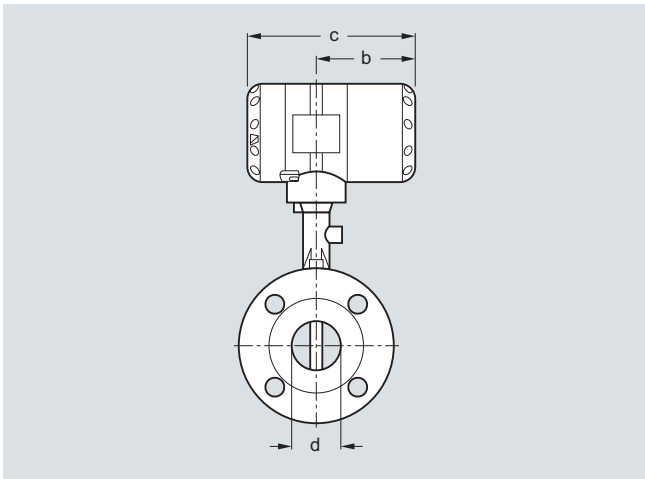

Flange version, side view, b = 105 mm (4.13 inches), c = 179 mm (7.05 inches)

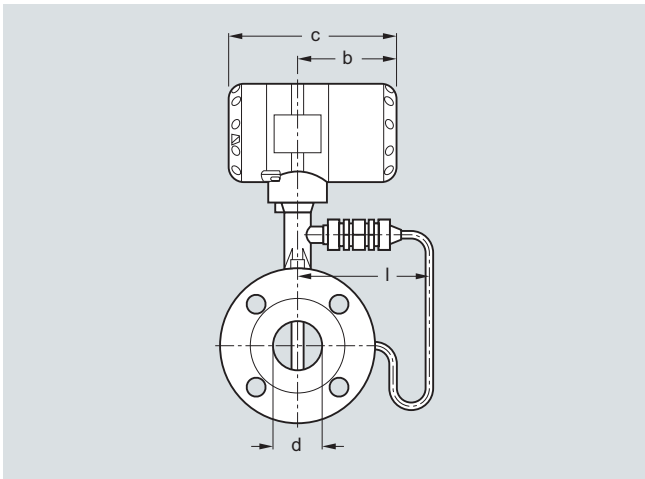

Flange version, side view, b = 105 mm (4.13 inches), c = 179 mm (7.05 inches)

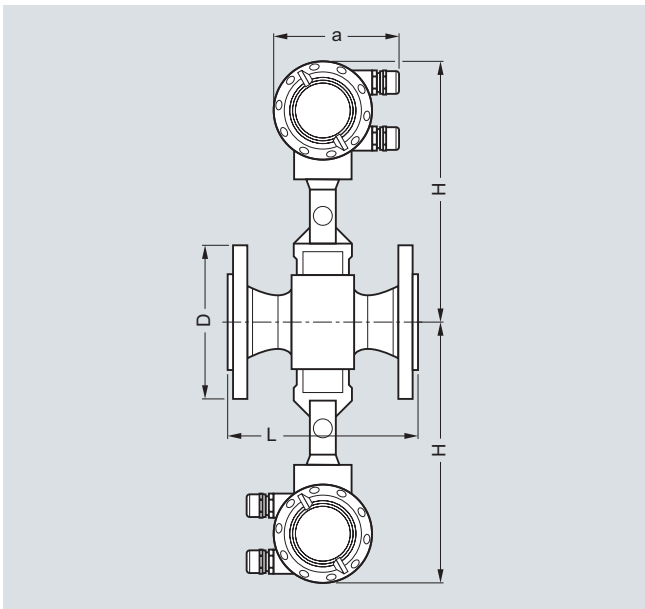

Flange version, dual converter, specified weight + 2.80 kg (6.17 lb)

Flange version EN1092-1								
Size	Pressure rating	Dimensions [mm (inches)]					Weight [kg (lb)]	
DN	PN	d	D	L	H	I	Flowmeter (with pressure sensor)	Flowmeter (without pressure sensor)
15	40	17.3 (0.68)	95 (3.74)	200 (7.87)	265 (10.43)	144 (5.67)	6.1 (13.45)	5.5 (12.13)
15	100	17.3 (0.68)	105 (4.13)	200 (7.87)	265 (10.43)	144 (5.67)	7.1 (15.65)	6.5 (14.33)
25	40	28.5 (1.12)	115 (4.53)	200 (7.87)	265 (10.43)	144 (5.67)	7.9 (17.42)	7.3 (16.09)
25	100	28.5 (1.12)	140 (5.51)	200 (7.87)	265 (10.43)	144 (5.67)	9.9 (21.83)	9.3 (20.50)
40	40	43.1 (1.70)	150 (5.91)	200 (7.87)	270 (10.63)	144 (5.67)	10.8 (23.81)	10.2 (22.49)
40	100	42.5 (1.67)	170 (6.69)	200 (7.87)	270 (10.63)	144 (5.67)	14.8 (32.63)	14.2 (31.31)
50	16	54.5 (2.15)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	12.7 (28.00)	12.1 (26.68)
50	40	54.5 (2.15)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	12.9 (28.44)	12.3 (27.12)
50	63	54.5 (2.15)	180 (7.09)	200 (7.87)	275 (10.83)	144 (5.67)	16.9 (37.26)	16.3 (35.94)
50	100	53.9 (2.12)	195 (7.68)	200 (7.87)	275 (10.83)	144 (5.67)	18.4 (40.57)	17.8 (39.24)
80	16	82.5 (3.25)	200 (7.87)	200 (7.87)	290 (11.42)	154 (6.06)	17.4 (38.36)	16.8 (37.04)
80	40	82.5 (3.25)	200 (7.87)	200 (7.87)	290 (11.42)	154 (6.06)	19.4 (42.77)	18.8 (41.45)
80	63	81.7 (3.22)	215 (8.46)	200 (7.87)	290 (11.42)	154 (6.06)	23.4 (51.59)	22.8 (50.27)
80	100	80.9 (3.19)	230 (9.06)	200 (7.87)	290 (11.42)	154 (6.06)	27.4 (60.41)	26.8 (59.08)
100	16	107.1 (4.22)	220 (8.66)	250 (9.84)	310 (12.20)	164 (6.46)	22 (48.50)	21.4 (47.18)
100	40	107.1 (4.22)	235 (9.25)	250 (9.84)	310 (12.20)	164 (6.46)	25 (55.12)	24.4 (53.79)
100	63	106.3 (4.19)	250 (9.84)	250 (9.84)	310 (12.20)	164 (6.46)	30 (66.14)	29.4 (64.82)
100	100	104.3 (4.11)	265 (10.43)	250 (9.84)	310 (12.20)	164 (6.46)	36 (79.37)	35.4 (78.04)
150	16	159.3 (6.27)	285 (11.22)	300 (11.81)	325 (12.80)	174 (6.85)	35.8 (78.93)	35.2 (77.60)
150	40	159.3 (6.27)	300 (11.81)	300 (11.81)	325 (12.80)	174 (6.85)	41.8 (92.15)	41.2 (90.83)
150	63	157.1 (6.19)	345 (13.58)	300 (11.81)	325 (12.80)	174 (6.85)	59.8 (131.84)	59.2 (130.51)
150	100	154.1 (6.07)	355 (13.98)	300 (11.81)	325 (12.80)	174 (6.85)	67.8 (149.47)	67.2 (148.15)
200	10	206.5 (8.13)	340 (13.39)	300 (11.81)	350 (13.78)	194 (7.64)	38.4 (84.66)	37.8 (83.33)
200	16	206.5 (8.13)	340 (13.39)	300 (11.81)	350 (13.78)	194 (7.64)	38.4 (84.66)	37.8 (83.33)
200	25	206.5 (8.13)	360 (14.17)	300 (11.81)	350 (13.78)	194 (7.64)	47.4 (104.50)	46.8 (103.18)
200	40	206.5 (8.13)	375 (14.76)	300 (11.81)	350 (13.78)	194 (7.64)	55.4 (122.14)	54.8 (120.81)
250	10	260.4 (10.25)	395 (15.55)	380 (14.96)	370 (14.57)	224 (8.82)	58.0 (127.87)	57.4 (126.55)
250	16	260.4 (10.25)	405 (15.94)	380 (14.96)	370 (14.57)	224 (8.82)	59.0 (130.07)	58.4 (128.75)
250	25	258.8 (10.19)	425 (16.73)	380 (14.96)	370 (14.57)	224 (8.82)	75.0 (165.35)	74.4 (164.02)
250	40	258.8 (10.19)	450 (17.72)	380 (14.96)	370 (14.57)	224 (8.82)	93.0 (205.03)	92.4 (203.71)
300	10	309.7 (12.19)	445 (17.52)	450 (17.72)	395 (15.55)	244 (9.61)	76.3 (168.21)	75.7 (166.89)
300	16	309.7 (12.19)	460 (18.11)	450 (17.72)	395 (15.55)	244 (9.61)	82.8 (182.54)	82.2 (181.22)
300	25	307.9 (12.12)	485 (19.09)	450 (17.72)	395 (15.55)	244 (9.61)	99.3 (218.92)	98.7 (217.60)
300	40	307.9 (12.12)	515 (20.28)	450 (17.72)	395 (15.55)	244 (9.61)	128.1 (282.41)	127.5 (281.09)

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300


#### Flange version ASME B16.5

Size	Pressure rating	Dimensions [mm (inches)]					Weight [kg (lb)]	
		DN	class	d	D	L	H	I
1/2	150	15.8 (0.62)	90 (3.54)	200 (7.87)	265 (10.43)	144 (5.67)	5.1 (11.24)	4.5 (9.92)
1/2	300	15.8 (0.62)	95 (3.74)	200 (7.87)	265 (10.43)	144 (5.67)	5.5 (12.13)	4.9 (10.80)
1/2	600	13.9 (0.55)	95 (3.74)	200 (7.87)	265 (10.43)	144 (5.67)	5.7 (12.57)	5.1 (11.24)
1	150	26.6 (1.05)	110 (4.33)	200 (7.87)	265 (10.43)	144 (5.67)	6.8 (14.99)	6.2 (13.67)
1	300	26.6 (1.05)	125 (4.92)	200 (7.87)	265 (10.43)	144 (5.67)	7.8 (17.20)	7.2 (15.87)
1	600	24.3 (0.96)	125 (4.92)	200 (7.87)	265 (10.43)	144 (5.67)	8.1 (17.86)	7.5 (16.53)
1 1/2	150	40.9 (1.61)	125 (4.92)	200 (7.87)	270 (10.63)	144 (5.67)	8.9 (19.62)	8.3 (18.30)
1 1/2	300	40.9 (1.61)	155 (6.10)	200 (7.87)	270 (10.63)	144 (5.67)	11 (24.25)	10.4 (22.93)
1 1/2	600	38.1 (1.50)	155 (6.10)	200 (7.87)	270 (10.63)	144 (5.67)	12 (26.46)	11.4 (25.13)
2	150	52.6 (2.07)	150 (5.91)	200 (7.87)	275 (10.83)	144 (5.67)	11.6 (25.57)	11 (24.25)
2	300	52.6 (2.07)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	13 (28.66)	12.4 (27.34)
2	600	49.3 (1.94)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	14.5 (31.97)	13.9 (30.64)
3	150	78 (3.07)	190 (7.48)	200 (7.87)	290 (11.42)	154 (6.06)	20.4 (44.97)	19.8 (43.65)
3	300	78 (3.07)	210 (8.27)	200 (7.87)	290 (11.42)	154 (6.06)	23.4 (51.59)	22.8 (50.27)
3	600	73.7 (2.90)	210 (8.27)	200 (7.87)	290 (11.42)	154 (6.06)	24.4 (53.79)	23.8 (52.47)
4	150	102.4 (4.03)	230 (9.06)	250 (9.84)	310 (12.20)	164 (6.46)	24 (52.91)	23.4 (51.59)
4	300	102.4 (4.03)	255 (10.04)	250 (9.84)	310 (12.20)	164 (6.46)	32 (70.55)	31.4 (69.23)
4	600	97.2 (3.83)	275 (10.83)	250 (9.84)	310 (12.20)	164 (6.46)	41 (90.39)	40.4 (89.07)
6	150	154.2 (6.07)	280 (11.02)	300 (11.81)	325 (12.80)	174 (6.85)	36.8 (81.13)	36.2 (79.81)
6	300	154.2 (6.07)	320 (12.60)	300 (11.81)	325 (12.80)	174 (6.85)	51.8 (114.20)	51.2 (112.88)
6	600	146.3 (5.76)	355 (13.98)	300 (11.81)	325 (12.80)	174 (6.85)	76.8 (169.31)	46.2 (101.85)
8	150	202.7 (7.98)	345 (13.58)	300 (11.81)	350 (13.78)	194 (7.64)	50.6 (111.55)	50.0 (110.23)
8	300	202.7 (7.98)	380 (14.96)	300 (11.81)	350 (13.78)	194 (7.64)	75.4 (166.23)	74.8 (164.91)
10	150	254.5 (10.02)	405 (15.94)	380 (14.96)	370 (14.57)	224 (8.82)	75.0 (165.35)	74.4 (164.02)
10	300	254.5 (10.02)	455 (17.91)	380 (14.96)	370 (14.57)	224 (8.82)	107.0 (235.89)	106.4 (234.57)
12	150	304.8 (12.00)	485 (19.09)	450 (17.72)	395 (15.55)	244 (9.61)	106.9 (235.67)	106.3 (234.35)
12	300	304.8 (12.00)	520 (20.47)	450 (17.72)	395 (15.55)	244 (9.61)	151.9 (334.88)	151.3 (333.56)


# SITRANS F flowmeters

## SITRANS F X


### SITRANS FX300

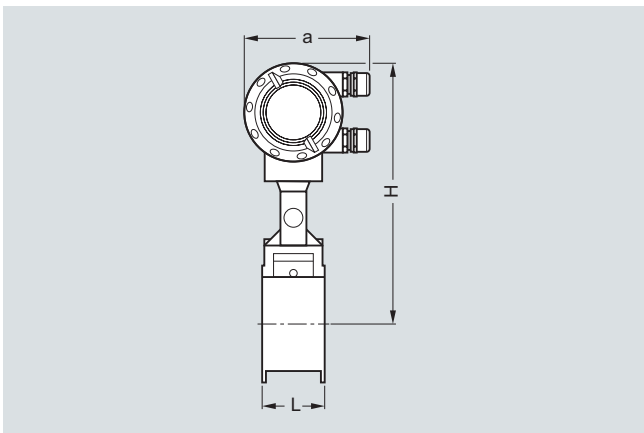


Sandwich version, front view, a = 133 mm (5.24 inches)

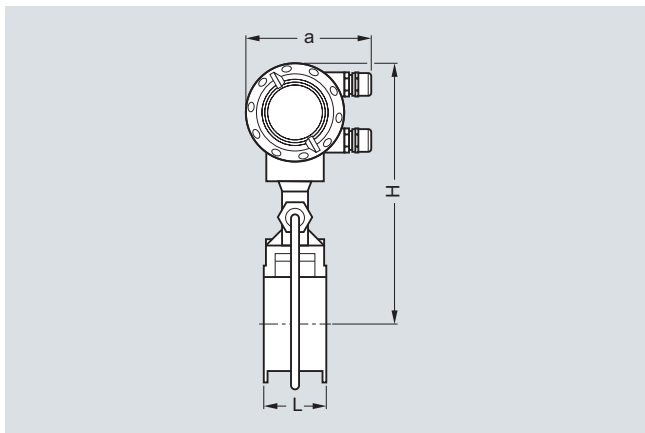

Sandwich version, front view, a = 133 mm (5.25 inches)

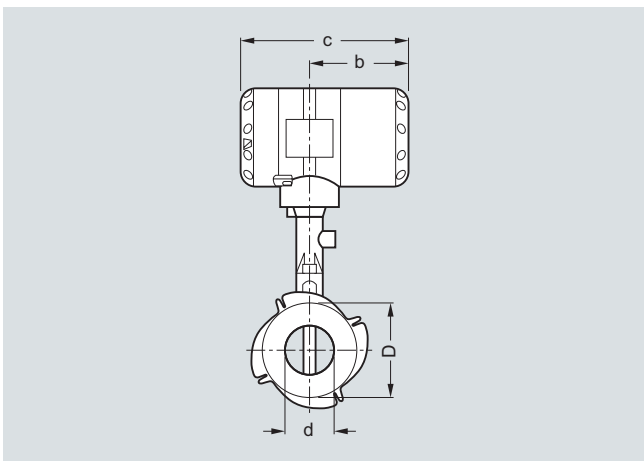

Sandwich version, side view, b = 105 mm (4.13 inches), c = 179 mm (7.05 inches)

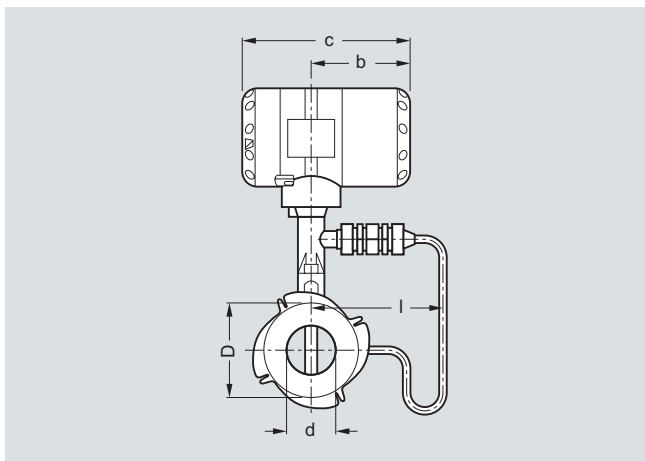

Sandwich version, side view, b = 105 mm (4.13 inches), c = 179 mm (7.05 inches)

4

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300

#### Sandwich version EN

Size	Pressure rating	Dimensions [mm (inches)]					Weight [kg (lb)]	
		DN	PN	d	D	L	H	I
15	16 ... 100	16 (0.63)	45 (1.77)	65 (2.56)	265 (10.43)	144 (5.67)	4.1 (9.04)	3.5 (7.72)
25	16 ... 100	24 (0.94)	65 (2.56)	65 (2.56)	265 (10.43)	144 (5.67)	4.9 (10.80)	4.3 (9.48)
40	16 ... 100	38 (1.50)	82 (3.23)	65 (2.56)	270 (10.63)	144 (5.67)	5.5 (12.13)	4.9 (10.80)
50	16 ... 100	50 (1.97)	102 (4.02)	65 (2.56)	275 (10.83)	144 (5.67)	6.6 (14.55)	6 (13.23)
80	16 ... 100	74 (2.91)	135 (5.31)	65 (2.56)	290 (11.42)	155 (6.10)	8.8 (19.40)	8.2 (18.08)
100	16 ... 100	97 (3.82)	158 (6.22)	65 (2.56)	310 (12.20)	164 (6.46)	10.1 (22.27)	9.5 (20.94)

#### Sandwich version ASME

Size	Pressure rating	Dimensions [mm (inches)]					Weight [kg (lb)]	
		DN	class	d	D	L	H	I
½"	150, 300, 600	16 (0.63)	45 (1.77)	65 (2.56)	265 (10.43)	144 (5.67)	4.1 (9.04)	3.5 (7.72)
1"	150, 300, 600	24 (0.94)	65 (2.56)	65 (2.56)	265 (10.43)	144 (5.67)	4.9 (10.80)	4.3 (9.48)
1½"	150, 300, 600	38 (1.50)	82 (3.23)	65 (2.56)	270 (10.63)	144 (5.67)	5.5 (12.13)	4.9 (10.80)
2"	150, 300, 600	50 (1.97)	102 (4.02)	65 (2.56)	275 (10.83)	144 (5.67)	6.6 (14.55)	6 (13.23)
3"	150, 300, 600	74 (2.91)	135 (5.31)	65 (2.56)	290 (11.42)	155 (6.10)	8.8 (19.40)	8.2 (18.08)
4"	150, 300, 600	97 (3.82)	158 (6.22)	65 (2.56)	310 (12.20)	164 (6.46)	10.1 (22.27)	9.5 (20.94)

4

## Flow tables

## Measuring Range Limits

Size		Q <sub>min</sub>	Q <sub>max</sub>	Q <sub>min</sub>	Q <sub>max</sub>
DN to EN 1092-1	DN to ASME B16.5	EN 1092-1 [m <sup>3</sup> /h]	EN 1092-1 [m <sup>3</sup> /h]	ASME B16.5 [m <sup>3</sup> /h]	ASME B16.5 [m <sup>3</sup> /h]
<b>Water</b>					
15	½"	0.45	5.07	0.44	4.94
25	1"	0.81	11.40	0.81	11.40
40	1½"	2.04	28.58	2.04	28.58
50	2"	3.53	49.48	3.53	49.48
80	3"	7.74	108.37	7.74	108.37
100	4"	13.30	186.22	13.30	186.21
150	6"	30.13	421.86	30.13	421.86
200	8"	56.6	792.42	56.60	792.42
250	10"	90.48	1 266.8	90.48	1 266.8
300	12"	131.41	1 839.8	131.41	1 839.8

Values based on water at 20 °C (68 °F) and 1.013 bar<sub>abs</sub> (14.7 psi<sub>abs</sub>)

Size		Q <sub>min</sub>	Q <sub>max</sub>	Q <sub>min</sub>	Q <sub>max</sub>
DN to EN 1092-1	DN to ASME B16.5	EN 1092-1 [m <sup>3</sup> /h]	EN 1092-1 [m <sup>3</sup> /h]	ASME B16.5 [m <sup>3</sup> /h]	ASME B16.5 [m <sup>3</sup> /h]
<b>Air</b>					
15	½"	6.80	25.33	6.72	24.70
25	1"	10.20	81.43	10.20	81.43
40	1½"	25.35	326.63	25.35	326.63
50	2"	43.89	565.49	43.89	565.49
80	3"	96.14	1 238.64	96.14	1 238.60
100	4"	165.19	2 128.27	165.19	2 128.27
150	6"	374.23	4 821.60	374.23	4 821.60
200	8"	702.95	9 056.8	702.95	9 056.8
250	10"	1 123.7	14 478.0	1 123.7	14 478.0
300	12"	1 632.1	21 028.0	1 632.1	21 028.0

Values based on air at 20 °C (68 °F) and 1.013 bar<sub>abs</sub> (14.7 psi<sub>abs</sub>)

## Flow rate limits

Product	Nominal diameters		Minimum flow rates	Maximum flow rates
	to EN	to ASME	[m/s]	[m/s]
Liquids	DN 15 ... DN 300	DN ½"...DN 12"	$0.5 \times (998/\rho)^{0.5 \ 1)}$	$7 \times (998/\rho)^{0.47 \ 1)}$
Gas, steam/vapor	DN 15 ... DN 300	DN ½"...DN 12"	$6 \times (1.29/\rho)^{0.5 \ 2)}$	$7 \times (998/\rho)^{0.47 \ 3)}$

$\rho$  = operating density [kg/m<sup>3</sup>]

<sup>1)</sup> Minimum flow rate 0.4 m/s (1.3 ft/s), maximum flow rate 10 m/s (32.8 ft/s)

<sup>2)</sup> Minimum flow rate 2 m/s (6.6 ft/s), maximum flow rate 80 m/s (262 ft/s)

<sup>3)</sup> Minimum flow rate 2 m/s (6.6 ft/s), maximum flow rate 80 m/s (262 ft/s); DN 15: 45 m/s (148 ft/s) and DN 25: 70 m/s (230 ft/s)

# SITRANS F flowmeters

## SITRANS F X

### SITRANS FX300

Measuring range saturated steam: 1 to 7 bar

Overpressure [bar]		1		3.5		5.2		7	
Density [kg/m <sup>3</sup> ]		1.13498		2.4258		3.27653		4.16732	
Temperature [°C]		120.6		148.2		160.4		170.6	
Flow [kg/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5								
15	½"	5.87	28.75	7.68	61.46	8.93	83.01	10.06	105.57
25	1"	11.82	92.42	17.28	197.53	20.09	266.81	22.66	339.35
40	1½"	29.64	370.71	43.33	792.33	50.63	1 070.2	56.8	1 361.2
50	2"	51.31	641.82	75.02	1 371.8	87.19	1 852.8	98.33	2 356.6
80	3"	112.41	1 405.8	164.33	3 004.7	191	4 058.4	215.39	5 161.8
100	4"	193.14	2 415.5	282.36	5 162.7	328.16	6 973.3	370.09	8 869.2
150	6"	437.56	5 472.4	639.69	11 696	743.45	15 798	838.44	20 093
200	8"	821.9	10 279.0	1 201.6	21 970.0	1 396.5	29 675.0	1 574.9	37 743
250	10"	1 313.9	16 433.0	1 920.9	35 122.0	2 232.5	47 439.0	2 517.7	60 337
300	12"	1 908.3	23 866.0	2 789.8	51 010.0	3 242.4	68 899.0	3 656.6	87 630

Measuring range saturated steam: 10.5 to 20 bar

Overpressure [bar]		10.5		14		17.5		20	
Density [kg/m <sup>3</sup> ]		5.88803		7.60297		9.31702		10.5442	
Temperature [°C]		186.2		198.5		208.7		215	
Flow [kg/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5								
15	½"	12.78	149.17	16.51	192.61	20.23	236.04	22.89	267.12
25	1"	26.93	479.46	30.6	619.11	33.87	758.69	36.04	858.62
40	1½"	67.51	1 878.2	76.72	2 150.7	84.93	2 395.3	90.35	2 557.7
50	2"	116.89	3 251.7	132.82	3 723.4	147.03	4 147	156.42	4 428.1
80	3"	256.03	7 122.4	290.93	8 155.8	322.06	9 083.7	342.62	9 699.3
100	4"	439.91	12 238	499.9	14 013	553.38	15 608	588.69	16 666
150	6"	996.62	27 725	1 132.5	31 747	1 253.7	35 359	1 333.7	37 756
200	8"	1 872.1	52 079	2 127.3	59 634	2 354.9	66 419	2 505.2	70 921
250	10"	2 992.7	83 254	3 400.7	95 333	3 764.6	106 180	4 004.9	113 380
300	12"	4 346.5	120 920	4 939.1	138 460	5 467.5	154 210	5 816.5	164 660



## Measuring range saturated steam: 15 to 100 psig

Overpressure [psig]		15		50		75		100	
Density [lbs/ft <sup>3</sup> ]		0.0719		0.1497		0.2036		0.2569	
Temperature [°F]		249.98		297.86		320.36		338.184	
Flow [lbs/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5								
15	½"	12.95	64.35	16.83	133.87	19.62	182.02	22.04	229.63
25	1"	26.25	206.83	37.86	430.3	44.15	585.06	49.59	738.09
40	1½"	65.81	829.61	94.92	1 726	110.68	2 346.7	124.32	2 960.5
50	2"	113.94	1 436.3	164.34	2 988	191.63	4 062.9	215.23	5 125.6
80	3"	249.57	3 146.1	360	6 545.3	419.74	8 899.4	471.45	11 227
100	4"	428.81	5 405.7	618.51	11 246	721.21	15 291	810.06	19 291
150	6"	971.47	12 246	1 401.2	25 478	1 633.9	34 642	1 835.2	43 703
200	8"	1 824.8	23 004	2 632.1	47 859	3 069.1	65 072	3 447.2	82 092
250	10"	2 917.2	36 774	4 207.7	76 508	4 906.4	104 030	5 510.8	131 230
300	12"	4 236.8	53 410	6 111.1	111 120	7 125.8	151 080	8 003.6	190 600

## Measuring range saturated steam: 150 to 300 psig

Overpressure [psig]		150		200		250		300	
Density [lbs/ft <sup>3</sup> ]		0.3627		0.4681		0.5735		0.6792	
Temperature [°F]		366.08		388.04		406.22		422.06	
Flow [lbs/h]		min.	max.	min.	max.	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5								
15	½"	27.79	324.21	35.86	418.47	43.94	512.66	52.04	607.12
25	1"	58.93	1 042.1	66.94	1 345.1	74.1	1 647.8	80.63	1 951.5
40	1½"	147.72	4 107.2	167.83	4 702.8	185.76	5 237	202.15	5 728
50	2"	255.75	7 111.9	290.56	8 141.9	321.6	9 066.8	350	9 917
80	3"	560.19	15 578	636.44	17 834	704.43	19 860	766.6	21 722
100	4"	962.54	26 766	1 093.5	30 643	1 210.4	34 124	1 317.2	37 324
150	6"	2 180.6	60 639	2 477.4	69 421	2 742.1	77 307	2 984	84 556
200	8"	4 096.1	113 900	4 653.6	130 400	5 150.7	145 210	5 605.2	158 830
250	10"	6 548.1	182 090	7 439.3	208 460	8 234.1	232 140	8 960.6	253 910
300	12"	9 510.2	264 460	10 805	302 760	11 959	337 150	13 014	368 770