

# SITRANS L Level instruments

## Continuous measurement - Ultrasonic controllers

MultiRanger 100/200

### Overview



MultiRanger is a versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries.

### Benefits

- Digital input for back-up level override from point level device
- Communication using built-in Modbus RTU via RS-485
- Compatible with SmartLinX system and SIMATIC PDM configuration software
- Single or dual point level monitoring
- Auto False-Echo Suppression for fixed obstruction avoidance
- Differential amplifier transceiver for common mode noise reduction and improved signal-to-noise ratio
- MultiRanger 100: level measurements, simple pump control and level alarm functions
- MultiRanger 200: level, volume and flow measurements in open channels, differential control, extended pump control and alarm functions
- Wall and panel mounting options

### Application

MultiRanger can be used on different materials, including fuel oil, municipal waste, acids, woodchips or on materials with high angles of repose. MultiRanger offers true dual point monitoring, digital communications with built-in Modbus® RTU via RS-485, as well as compatibility with SIMATIC PDM, allowing PC configuration and setup. MultiRanger features Sonic Intelligence® advanced echo-processing software for increased reading reliability.

MultiRanger 100 offers cost-effective level alarming, as well as on/off and alternating pump control. MultiRanger 200 will monitor open channel flow and features more advanced relay alarming and pump control functions as well as volume conversion.

It is compatible with chemical-resistant Echomax® transducers that can be used in hostile environments at temperatures as high as 145 °C (293 °F).

- Key Applications: wet wells, flumes/weirs, bar screen control, hoppers, chemical storage, liquid storage, crusher bins, dry solids storage

### Design

The MultiRanger is available in wall or panel mounting options.

### Technical specifications

#### Mode of Operation

Measuring principle	Ultrasonic level measurement
Measuring range	0.3 to 15 m (1 to 50 ft)

#### Input

• Analog (only MultiRanger 200)	0 to 20 mA or 4 to 20 mA, from alternate device, scaleable
• Digital	10 to 50 V DC switching level Logical 0 = < 0.5 V DC Logical 1 = 10 to 50 V DC Max. 3 mA

#### Output

• Echomax® Transducer	44 kHz
• Ultrasonic transducer	Compatible transducers: ST-H and Echomax series XPS-10/10F, XPS 15/15F, XCT-8, XCT-12 and XRS-5
• Relays	Rating 5 A at 250 V AC, non-inductive
- Version with 1 relay (MultiRanger 100 only)	1 Form A SPST
- Version with 3 relays	2 Form A SPST/ 1 Form C SPDT
- Version with 6 relays	4 Form A SPST/ 2 Form C SPDT
• mA output	0 to 20 mA or 4 to 20 mA
- Max. load	750 Ω, isolated
- Resolution	0.1% of range

#### Accuracy

• Error in measurement	0.25% of range or 6 mm (0.24"), whichever is greater
• Resolution	0.1% of measuring range <sup>1)</sup> or 2 mm (0.08"), whichever is greater
• Temperature compensation	<ul style="list-style-type: none"> <li>• -50 to +150 °C (-58 to +302 °F)</li> <li>• Integral temperature sensor</li> <li>• External TS-3 temperature sensor</li> <li>• Programmable fixed temperature values</li> </ul>

#### Rated operating conditions

##### Installation conditions

• Location	Indoor/outdoor
• Installation category	II
• Pollution degree	4

##### Ambient conditions

• Ambient temperature (housing)	-20 to +50 °C (-4 to +122 °F)
---------------------------------	-------------------------------

#### Design

• Weight	
- Wall mount	1.37 kg (3.02 lbs.)
- Panel mount	1.50 kg (3.31 lbs.)
• Material (enclosure)	Polycarbonate
• Degree of protection (enclosure)	
- Wall mount	IP65 / Type 4X / NEMA 4X
- Panel mount	IP54 / Type 3 / NEMA 3

1) Program range is defined as the empty distance to the face of the transducer plus any range extension.

# SITRANS L Level instruments

## Continuous measurement - Ultrasonic controllers

### MultiRanger 100/200

#### Electrical connection

- Transducer and mA output signal 2-core copper conductor, twisted, shielded, 0.5 to 0.75 mm<sup>2</sup> (22 to 18 AWG), Belden<sup>®</sup> 8760 or equivalent is acceptable
- Max. separation between transducer and transceiver 365 m (1200 ft)

#### Displays and controls

- Programming 100 x 40 mm (4 x 1.5") multi-block LCD with backlighting  
Programming using hand-held programmer, SIMATIC PDM or via PC with Dolphin Plus software

#### Power supply

- AC version 100 to 230 V AC ± 15%, 50/60 Hz, 36 VA (17 W)
- DC version 12 to 30 V DC (20 W)

#### Certificates and approvals

- CE<sup>1)</sup>  
Lloyd's Register of Shipping, ABS Type Approval, FM, CSA<sup>NRTL/C</sup>, UL listed  
CSA Class I, Div. 2, Groups A, B, C and D, Class II, Div.2, Groups F and G, Class III (wall mount only)

#### Communication

- RS-232 with Modbus RTU or ASCII via RJ-11 connector
- RS-485 with Modbus RTU or ASCII via terminal strips
- Optional: SmartLinX<sup>®</sup> cards

1) EMC performance available on request.

#### Selection and Ordering data

Order No.

#### MultiRanger 100/200

Versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries

C) **7ML 5 0 3 3 -**

#### Versions

MultiRanger 100, level measurement only  
MultiRanger 200, level, volume, flow and differential measurements

1  
2

#### Mounting, enclosure design

Wall mount, standard enclosure  
Wall mount, 4 entries, M20  
Panel mount (CE, CSA<sup>us/c</sup>, FM, UL)

A  
B  
C

#### Power supply

100 to 230 V AC  
12 to 30 V DC

A  
B

#### Number of measurement points

Single point version  
Dual point version

0  
1

#### Communication (SmartLinX)

Without module  
SmartLinX<sup>®</sup> Allen-Bradley<sup>®</sup> Remote I/O module  
SmartLinX PROFIBUS DP module  
SmartLinX DeviceNet<sup>™</sup> module  
See SmartLinX product page on page 5/175 for more information.

0  
1  
2  
3

#### Output relays

3 relays, 2 Form A, 1 Form 'C', 250 V AC  
6 relays, 4 Form A, 2 Form 'C', 250 V AC  
1 relay, 1 Form A, 250 V AC (available on MultiRanger 100 model only)

1  
2  
3

#### Approvals

General Purpose CE, FM, CSA<sup>us/c</sup>, UL listed  
CSA Class I, Div. 2, Groups A, B, C and D; Class II, Div 2, Groups F and G; Class III (for wall mount applications only)

A  
B

#### Instruction manual

English C) **7ML1998-5FB05**  
French C) **7ML1998-5FB13**  
Spanish C) **7ML1998-5FB23**  
German C) **7ML1998-5FB34**  
Note: The instruction manual should be ordered as a separate line on the order.

#### Other instruction manuals

SmartLinX Allen-Bradley Remote I/O, English C) **7ML1998-1AP03**  
SmartLinX PROFIBUS DP, English C) **7ML1998-1AQ03**  
SmartLinX PROFIBUS DP, German C) **7ML1998-1AQ32**  
SmartLinX PROFIBUS DP, French C) **7ML1998-1AQ12**  
SmartLinX DeviceNet, English C) **7ML1998-1BH02**  
Note: The appropriate SmartLinX instruction manual should be ordered as a separate line on the order.

#### Accessories

Handheld programmer **7ML1830-2AK**  
Tag, stainless steel, 12 x 45 mm (0.47 x 1.77"), one text line, suitable for enclosure **7ML1930-1AC**  
TS-3 Temperature Sensor - see TS-3 on page 5/112

#### Spare parts

Power Supply Board (100 to 230 V AC) C) **7ML1830-1MD**  
Power Supply Board (12 to 30 V DC) C) **7ML1830-1ME**  
Display Board C) **7ML1830-1MF**

See SmartLinX product page on page 5/175 for more information.

<sup>®</sup>Modbus is a registered trademark of Schneider Electric.

<sup>®</sup>Belden is a registered trademark of Belden Wire and Cable Company.

<sup>®</sup>Allen-Bradley is a registered trademark of Rockwell Automation.

<sup>™</sup>DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)


C) Subject to export regulations AL: N, ECCN: EAR99.

# SITRANS L Level instruments

## Continuous measurement - Ultrasonic controllers


MultiRanger 100/200

### Dimensional drawings

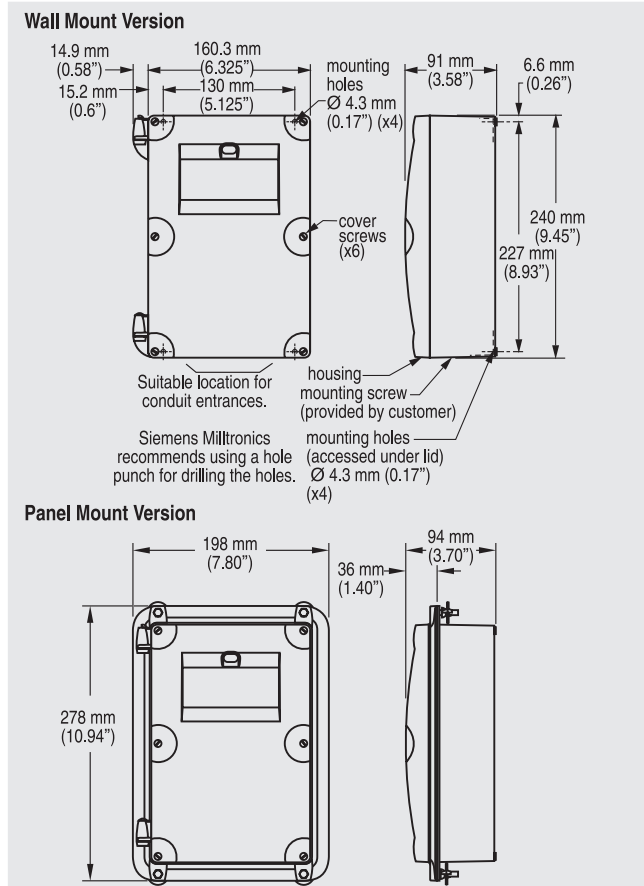

MultiRanger dimensions

### Schematics

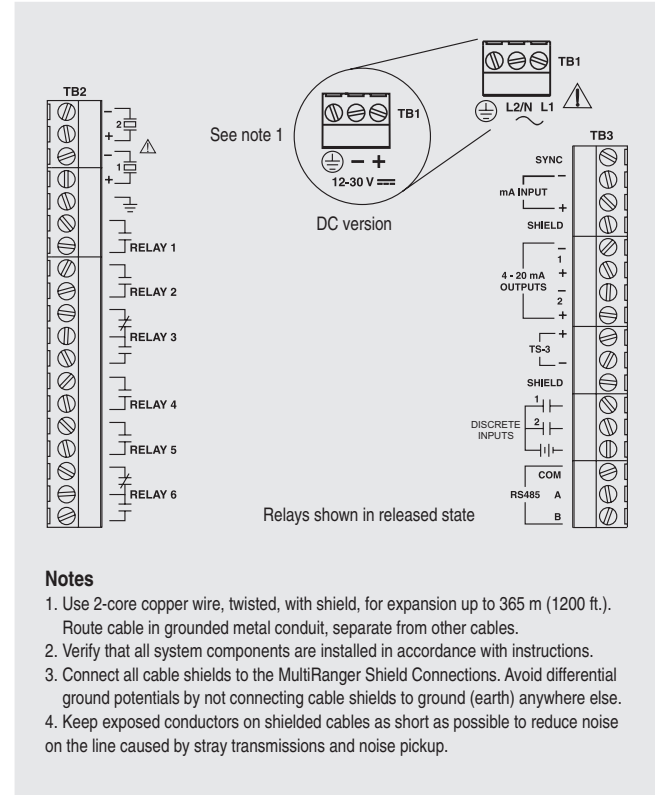

MultiRanger connection diagram