

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

#### Overview



The Siemens SITRANS LG series are guided wave radar transmitters for level, level/interface, and volume measurement of liquids and solids. The SITRANS LG product line can handle changes in process conditions, high temperatures and pressures, and steam.

#### Benefits

- High accuracy to +/- 2 mm
- Advanced Diagnostics available for high degree of safety
- Simple menu driven display offers ease of setup
- Large range of options offers reliability in most continuous level measurement applications
- Ease of maintenance through module design and field replaceable and adjustable probe options
- Perfect solution for wide range of applications from storage to interface with options for extreme pressure and temperature conditions
- Universally applicable in liquids, interface, slurries and solids
- Highly immune to buildup using auto learn function
- Ability to measure in loss of echo situations with probe end tracking
- Suitable for API 2350
- Convenient access using USB and remote interface accessories


#### Application

The SITRANS LG series comes in four different models, depending on the applications, level of performance, and functionality required:

- SITRANS LG240 offers configuration options for your hygienic and corrosive application requirements
- SITRANS LG250 Highly flexible solution for liquid level and interface applications. Extremely versatile offering solutions for storage, separation of materials or difficult ammonia applications
- SITRANS LG260 Ideal for measuring level in medium range solids applications including; grains, plastics, and cement
- SITRANS LG270 offers configuration options for extreme conditions including high temperature and high pressure applications such as: harsh applications found in chemical, HPI and energy industries for example, LPG gas tanks, steam boilers and distillation columns

#### Configuration


##### Mounting on nozzle

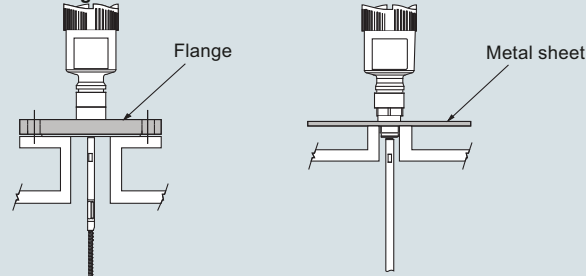


##### Installation in non-metal vessel

The guided microwave principle requires a metal surface on the process fitting. Therefore, use in plastic vessels etc. an instrument version with flange (from DN 50) or place a metal sheet,  $\text{Ø} > 200 \text{ mm}$  (8 inch), beneath the process fitting when screwing it in. Make sure that the plate has direct contact with the process fitting

##### Mounting socket




If possible, avoid sockets, mount the sensor flush with the vessel top. If this is not possible, use short sockets with small diameter. Higher sockets or sockets with a bigger diameter can generally be used. They simply increase the upper blocking distance. Check if this is relevant for your measurement. In such cases, always carry out a false signal suppression after installation.

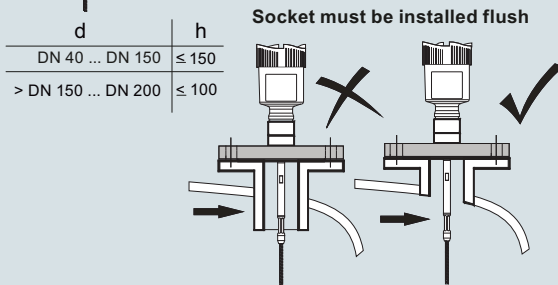

##### Socket must be installed flush

When welding the socket, make sure that the socket is flush to the vessel top.


Before beginning the welding work, remove the electronics module from the sensor. By doing this, you avoid damage to the electronics through inductive coupling.



##### Inflowing medium

Do not mount the instruments in or above the filling stream. Make sure that you detect the product surface, not the inflowing product.

SITRANS LG Series installation

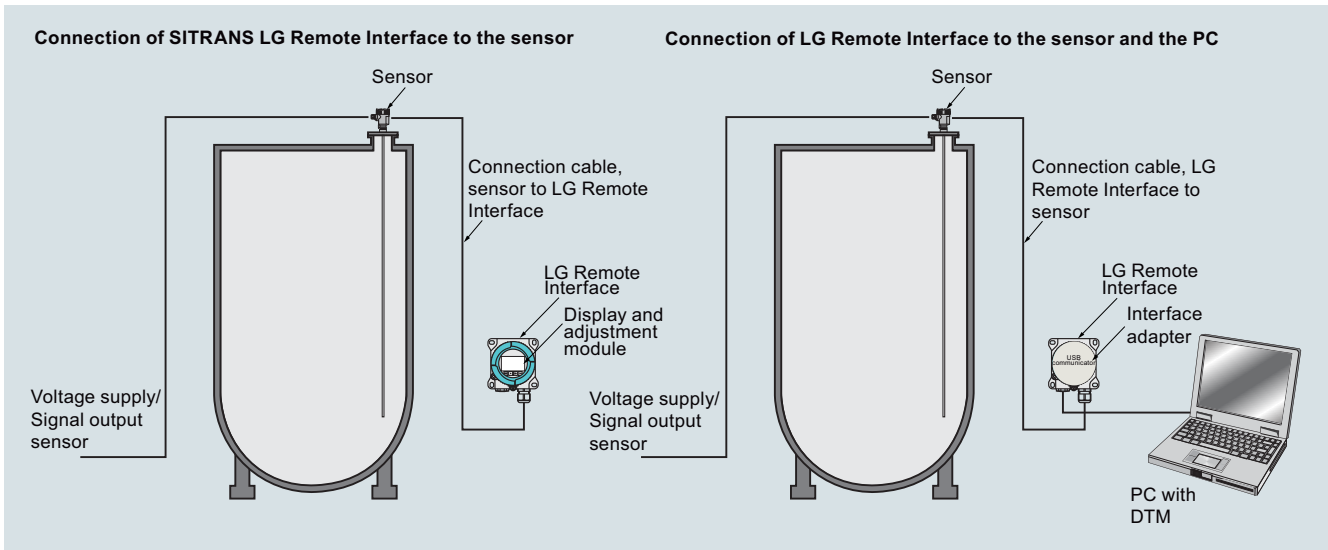

SITRANS LG Remote Interface installation

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

#### Technical specifications

<b>Mode of operation</b>		<b>Medium conditions</b>	
Measuring principle	Guided wave radar measurement	Dielectric constant	dK ≥ 1.4 (configuration dependent)
Measuring range	300 ... 75 000 mm (11.81 ... 2 952.75 inch)	Process temperature range	-196 ... +450 °C (-321 ... +842 °F)
<b>Output</b>		Vessel pressure	-1 ... +400 bar (-100 ... +40 000 kPa)
mA analog output with HART digital signal	4 ... 20 mA/HART (SIL optional)	<b>Design</b>	
Output range	Current: minimum 3.8 mA, maximum 20.5 mA ≤ 10 mA for 5 ms after switching on, ≤ 3.6 mA	Instrument weight (dependent on process fitting) - see manual for further details	Approx. 0.8 ... 8 kg (0.176 ... 17.64 lb)
• Analog		Materials	<ul style="list-style-type: none"> <li>Plastic housing plastic PBT (Polyester)</li> <li>Aluminum die-cast housing, aluminum die-cast AlSi10 mg, powder-coated- basis: polyester</li> <li>Stainless steel housing, precision casting 316L</li> <li>Stainless steel housing, electropolished 316L</li> </ul>
• Startup current	Diagnostic alarm	• Enclosure	
Digital communication	Failure signal current output (adjustable): last valid measured value, ≥ 21 mA, ≤ 3.6 mA	• Degree of protection	2 x M20 x 1.5 or 2 x ½" NPT
Modbus	HART Version 7 x and multidrop compatible	• Cable inlet	Process connections
PROFIBUS PA	HART Version 7 x and multidrop compatible	• Pipe thread, cylindrical (ISO 228 T1)	• Pipe thread, cylindrical (ISO 228 T1)
FOUNDATION Fieldbus	HART Version 7 x and multidrop compatible	• American pipe thread, conical (ASME B1.20.1)	G¾" A, G1" A, G1½" A according to DIN 3852-A
<b>Performance</b>		• Flanged	DIN from DN 25, ASME from 1" Hygienic fittings
• Measuring cycle time	Process reference conditions according to DIN EN 61298-1	• Hygienic	
• Step response time	< 500 ms	<b>Programming</b>	
• Temperature Effects	≤ 3 s	Local	Four button, menu-driven data entry
Non-linearity	The measurement error from the process conditions is in the specified pressure and temperature range of below 1 %	Handheld communicator	Hart communicator
• Coaxial		PC	SIMATIC PDM, AMS, PACTware
• Single rod probes		<b>Power</b>	
• Interface models	See manual for more details	2-wire Hart version	9.6 ... 35 V DC
Resolution and repeatability	Accuracy +/- 2 mm (0.08 inch)	4-wire versions	9.6 ... 48 V DC, 20 ... 42 V AC, 50/60 Hz, and 90 ... 253 V AC, 50/60 Hz
Accuracy	+/- 2 mm (0.08 inch)	Modbus	8 ... 30 V DC
• Coaxial/rod/cable probes	+/- 5 mm (0.197 inch)	PROFIBUS PA	9 ... 32 V DC
• Interface models	Note: Typical deviation, Interface measurement. See manual for full explanation.	FOUNDATION Fieldbus	9 ... 32 V DC
<b>Rated operating conditions</b>		Note: see manual for specific power based on ordered options	
Ambient temperature for enclosure	-40 ... +80 °C (-40 ... +176 °F)	<b>Certificates and approvals</b>	
LCD readable temperature range	-40 ... +80 °C (-40 ... +176 °F) with display heated option	Hazardous approvals:	ATEX, FM, CSA, IECEx Note: other regional approvals are available
Location	Indoor/outdoor	Hygienic approvals:	EHEDG, FDA
Installation category	II	Overfill protection	WHG, Vlarem
Pollution degree	2	Ship approval	ABS, CCS, GL, BV, LR
Relative Humidity	20 ... 85 %		

## Level Measurement

### Continuous level measurement

### Guided wave radar transmitters

#### SITRANS LG series

Industries	SITRANS LG240 Food, Beverage and Pharmaceutical	SITRANS LG250 Chemical/HPI/Power/General	SITRANS LG260 Cement, power generation, food, processing, mineral pro- cessing, mining	SITRANS LG270 Chemical/HPI/Power/General
Applications	Hygienic and corrosive applications	Liquids, storage and process vessels with agitators, vaporous liquids, interface	Cement, fly ash, grain, coal, flour, plastics	Aggressive applications in liquids, storage and process vessels with agitators, vaporous liquids, high temperatures and pressures, low dielectric media
Range	32 m	75 m	60 m	60 m
Performance	± 2 mm	± 2 mm	± 2 mm	± 2 mm
Temperature	-40 ... +150 °C (-40 ... +302 °F)	-40 ... +200 °C (-40 ... +392 °F)	-40 ... +200 °C (-40 ... +392 °F)	-196 ... +450 °C (-320.8 ... +842 °F)
Communications	<ul style="list-style-type: none"> <li>• 4 ... 20 mA/HART</li> <li>• Modbus: Modbus RTU, Modbus ASCII</li> <li>• PROFIBUS PA</li> <li>• FOUNDATION Fieldbus</li> <li>• SIMATIC PDM</li> <li>• DTM/FDT for PACTware</li> <li>• Fieldcare</li> </ul>	<ul style="list-style-type: none"> <li>• 4 ... 20 mA/HART</li> <li>• Modbus: Modbus RTU, Modbus ASCII</li> <li>• PROFIBUS PA</li> <li>• FOUNDATION Fieldbus</li> <li>• SIMATIC PDM</li> <li>• DTM/FDT for PACTware</li> <li>• Fieldcare</li> </ul>	<ul style="list-style-type: none"> <li>• 4 ... 20 mA/HART</li> <li>• Modbus: Modbus RTU, Modbus ASCII</li> <li>• PROFIBUS PA</li> <li>• FOUNDATION Fieldbus</li> <li>• SIMATIC PDM</li> <li>• DTM/FDT for PACTware</li> <li>• Fieldcare</li> </ul>	<ul style="list-style-type: none"> <li>• 4 ... 20 mA/HART</li> <li>• Modbus: Modbus RTU, Modbus ASCII</li> <li>• PROFIBUS PA</li> <li>• FOUNDATION Fieldbus</li> <li>• SIMATIC PDM</li> <li>• DTM/FDT for PACTware</li> <li>• Fieldcare</li> </ul>

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG240</b>	<b>7ML5880-</b>		<b>SITRANS LG240</b>	<b>7ML5880-</b>	
Guided Wave Radar sensor for Hygienic and corrosive continuous level and interface measurement of liquids.			Guided Wave Radar sensor for Hygienic and corrosive continuous level and interface measurement of liquids.		
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.			<b>Note: Version/Material, Process fitting/Material, and Length options are available only with options of corresponding type.</b>		
<b>Approvals</b>			<b>Probe version/Material</b>		
General purpose (CSA, FM, CE)	<b>0 A</b>		Probe cable ø 4 mm (0.16 inch) with gravity weight/PFA <sup>17)</sup>	<b>A</b>	
Overfill protection (WHG; VLAREM) <sup>9)11)</sup>	<b>0 C</b>		Probe exchangeable rod ø 8 mm (0.31 inch)/ 1.4435 (Basle standard) <sup>17)</sup>	<b>B</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 <sup>14)</sup>	<b>0 E</b>		Probe exchangeable rod ø 8 mm (0.31 inch)/ 1.4435 (Basle standard) can be autoclaved <sup>17)</sup>	<b>C</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC + Overfill (WHG;VLAREM) <sup>11)</sup>	<b>0 F</b>		Probe rod ø 10 mm (0.39 inch)/PFA <sup>17)</sup>	<b>D</b>	
ATEX II 1G, 1/2G 2G Ex ia IIC + ATEX II 1D, 1/2D, 2D IP6x <sup>1)9)15)17)</sup>	<b>0 H</b>		Probe exchangeable rod (ø 8 mm) /1.4435 (BN2), electropolished (Ra < 0.38 µm) <sup>17)</sup>	<b>E</b>	
ATEX II 1/2G, 2G Ex d ia IIC T6 <sup>3)13)16)</sup>	<b>0 J</b>		<b>Process fitting/Material</b>		
ATEX II 1/2G, 2G Ex d ia IIC + ATEX II 1/2D, 2D IP6x <sup>3)13)16)17)</sup>	<b>0 K</b>		Clamp 2" PN 16 (ø 64 mm) DIN 32676, ISO2852/1.4435 (BN2)	<b>0 0</b>	
ATEX II 1D, 1/2D, 2D IP6x <sup>1)9)17)18)</sup>	<b>0 N</b>		Clamp 2" PN 16 (ø 64 mm) DIN 32676, ISO2852/PTFE-TFM 1600	<b>0 1</b>	
ATEX II 1G, II 1/2G, II 2G Ex ia IIC T6...T1 Ga, Ga/Gb, Gb /IEC Ex ia IIC T6...T1 Ga, Ga/Gb, Gb <sup>1)14)</sup>	<b>0 W</b>		Clamp 2 1/2" PN 10 (ø 77.5 mm) DIN 32676, ISO2852/1.4435 (BN2)	<b>0 2</b>	
IEC Ex ia IIC T6 <sup>14)</sup>	<b>0 P</b>		Clamp 2 1/2" PN 10 (ø 77.5 mm) DIN 32676, ISO2852/PTFE-TFM 1600	<b>0 3</b>	
IEC Ex ia IIC T6 + IEC IP6x T tD <sup>1)9)15)17)</sup>	<b>0 Q</b>		Clamp 3" PN 10 (ø 91 mm) D N 32676, ISO2852/1.4435 (BN2)	<b>0 4</b>	
IEC Ex d ia IIC T6 <sup>3)13)16)</sup>	<b>0 R</b>		Clamp 3" PN 10 (ø 91 mm) DIN 32676, ISO2852/PTFE-TFM 1600	<b>0 5</b>	
IEC Ex d ia IIC T6 + IEC IP6x T tD <sup>3)13)16)</sup>	<b>0 S</b>		Clamp 4" PN 6 (ø 119 mm) DIN 32676, ISO2852/1.4435(BN2)	<b>0 6</b>	
FM (NI) Class I, Div. 2, Groups A, B, C, D2 <sup>9)12)16)</sup>	<b>1 A</b>		Clamp 4" PN 6 (ø 119 mm) DIN 32676, ISO2852/PTFE-TFM 1600	<b>0 7</b>	
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>9)15)</sup>	<b>1 B</b>		Clamp 1½" PN 16 (ø 50.5 mm) DIN 32676, ISO2852/1.4435 (BN2)	<b>4 0</b>	
FM (XP-AIS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>3)13)16)</sup>	<b>1 C</b>		Bolting DN 32, PN 40 DIN 11851/ 1.4435(BN2)	<b>0 8</b>	
CSA (NI) Class I, Div. 2, Groups A, B, C, D; (DIP) Class II, III, Div. 1, Groups E, F, G <sup>1)5)17)</sup>	<b>1 E</b>		Bolting DN 32, PN 40 DIN 11851/PTFE-TFM 1600	<b>1 0</b>	
CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>1)</sup>	<b>1 F</b>		Bolting DN 40, PN 40 DIN 11851/1.4435 (BN2)	<b>1 1</b>	
CSA (XP-IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>3)13)16)</sup>	<b>1 G</b>		Bolting DN 40, PN 40 DIN 11851/PTFE-TFM 1600	<b>1 2</b>	
NEPSI Ex ia IIC T6 <sup>14)</sup>	<b>2 A</b>		Bolting DN 50, PN 25 DIN 11851/ 1.4435(BN2)	<b>1 3</b>	
NEPSI Ex ia IIC T6 + DIP A20/21 TA T* <sup>1)9)15)</sup>	<b>2 B</b>		Bolting DN 50, PN 25 DIN 11851/PTFE-TFM 1600	<b>1 4</b>	
NERSI Ex d ia IIC T6 <sup>9)13)16)</sup>	<b>2 C</b>		Bolting DN 65, PN 25 DIN 11851/PTFE-TFM 1600	<b>1 5</b>	
NEPSI Ex d ia IIC T6 + DIP A20/21 TA T* <sup>9)13)16)</sup>	<b>2 D</b>		Flange DN 25, PN 40 Form C, DIN 2501/ PTFE-TFM 1600	<b>2 0</b>	
NEPSI DIP A20/21 TA T* <sup>1)9)16)</sup>	<b>2 G</b>		Flange DN 40, PN 40 Form C, DIN 2501/ PTFE-TFM 1600	<b>2 1</b>	
INMETRO Ex ia IIC T6 ... T1 <sup>14)</sup>	<b>3 A</b>		Flange DN 50, PN 40 Form C, DIN 2501/ PTFE-TFM 1600	<b>2 2</b>	
INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex ia IIC T6, Ga, Ga/Gb <sup>1)9)15)</sup>	<b>3 B</b>		Flange DN 50, PN 40 Form V13, DIN 2513/ PTFE-TFM 1600	<b>2 3</b>	
INMETRO Ex d ia IIC T6 ... T1 <sup>9)13)16)</sup>	<b>3 C</b>		Flange DN 65, PN 40 Form C, DIN 2513/ PTFE-TFM 1600	<b>2 4</b>	
INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex d ia IIC T6 Ga/Gb <sup>9)13)16)</sup>	<b>3 D</b>		Flange DN 80, PN 40 Form C, DIN 2501/ PTFE-TFM 1600	<b>2 5</b>	
INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db <sup>1)13)16)</sup>	<b>3 G</b>		Flange DN 100, PN 16 Form C, DIN 2501/ PTFE-TFM 1600	<b>2 6</b>	
Korea KC ex free area	<b>6 A</b>				
GOST-R/EAC 0 Ex ia IIC T1 ... T6 X <sup>14)</sup>	<b>5 A</b>				
GOST-R/EAC 0 Ex ia IIC T1 ... T6 X + Ex t IIC T ... IP66 <sup>1)15)</sup>	<b>5 B</b>				
GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X <sup>9)13)16)</sup>	<b>5 C</b>				
GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X + Ex t IIC T ... IP66 <sup>9)13)16)</sup>	<b>5 D</b>				

## Level Measurement

### Continuous level measurement

### Guided wave radar transmitters


#### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG240</b>	<b>7ML5880-</b>		<b>SITRANS LG240</b>	<b>7ML5880-</b>	
Guided Wave Radar sensor for Hygienic and corrosive continuous level and interface measurement of liquids.			Guided Wave Radar sensor for Hygienic and corrosive continuous level and interface measurement of liquids.		
Flange DN 80, PN 40 EN 1092-1 Form B1/PTFE-TFM 1600	<b>2 7</b>		Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel		<b>P</b>
Flange DN 100, PN 40 EN 1092-1 Form B1/PTFE-TFM 1600	<b>2 8</b>		Stainless steel (precision casting) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel		<b>Q</b>
Flange 2" 150 lb RF, ASME B16.5/PTFE-TFM 1600	<b>3 0</b>		Stainless steel (electropolished) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel		<b>R</b>
Flange 2" 300 lb RF, ASME B16.5/PTFE-TFM 1600	<b>3 1</b>		Aluminum single chamber / IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>W</b>
Flange 3" 150 lb RF, ASME B16.5/PTFE-TFM 1600	<b>3 2</b>		Aluminum double chamber / IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>X</b>
Flange 4" 150 lb RF, ASME B16.5/PTFE-TFM 1600	<b>3 3</b>		Stainless steel single chamber (precision casting) / IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>Y</b>
Note: The pressure limit for all PTFE coated versions is 16 bar (per manual).			Stainless steel double chamber / IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>S</b>
<b>Electronics</b>			Remote stainless steel single chamber housing, electropolished/IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>10)</sup>		<b>Z Q 2 A</b>
Two-wire 4 ... 20 mA/HART	<b>0</b>		Remote plastic single chamber housing / IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>10)</sup>		<b>Z Q 2 B</b>
Four-wire Modbus <sup>3)13)</sup>	<b>1</b>				
Two-wire 4 ... 20 mA/HART with SIL qualification <sup>9)</sup>	<b>2</b>				
Four-wire 4 ... 20 mA/HART; 90 ... 253 V AC; 50/60 Hz <sup>3)13)</sup>	<b>3</b>				
Four-wire 4 ... 20 mA/HART; 9.6 ... 48 V DC; 20 ... 42 V AC <sup>3)13)</sup>	<b>4</b>				
PROFIBUS PA <sup>9)</sup>	<b>5</b>				
FOUNDATION Fieldbus <sup>9)</sup>	<b>6</b>				
<b>Seal/Process temperature</b>			<b>Lengths</b>		
Without glass seal/-40 ... +150 °C (-40 ... +302 °F) <sup>2)</sup>	<b>A</b>		<u>Rod ø 8 mm (0.31 inch)/1.4435 (Basle standard 300 ... 4 000 mm)</u>		
FFKM (Kalrez 6221)/-20 ... 150 °C (-4 ... +302 °F) <sup>4)</sup>	<b>B</b>		300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>6)</sup>		<b>0</b>
EPDM (Freudenberg 70 EPDM 291)/-20 ... 130 °C (-4 ... +266 °F) <sup>4)</sup>	<b>C</b>		1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>6)</sup>		<b>1</b>
			2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>6)</sup>		<b>2</b>
			3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>6)</sup>		<b>3</b>
<b>Housing/Protection/Cable</b>			<u>Rod ø 10 mm (0.24 inch)/PFA (300 ... 4 000 mm)</u>		
<b>Note: for installation of remote display, 7ML5840, with LG two chamber housing options, contact PVC</b>			300 mm (11.81 inch) <sup>6)</sup>		<b>9 R 1 A</b>
Plastic IP66/IP67 M20 x 1.5/blind stopper	<b>A</b>		500 mm (19.69 inch) <sup>6)</sup>		<b>9 R 1 B</b>
Plastic IP66/IP67 1/2" NPT/blind stopper	<b>B</b>		300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>6)</sup>		<b>9 R 1 C</b>
Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>C</b>		1 001 ... 5 000 mm (39.41 ... 78.74 inch) <sup>6)</sup>		<b>9 R 1 D</b>
Aluminum/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>D</b>		2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>6)</sup>		<b>9 R 1 E</b>
Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>E</b>		3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>6)</sup>		<b>9 R 1 F</b>
Aluminum double chamber/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>F</b>		<u>Cable ø 4 mm (0.16 inch)/PFA (500 ... 32 000 mm)</u>		
Stainless steel (precision casting) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>G</b>		500 mm (9.69 inch)		<b>9 R 1 G</b>
Stainless steel (precision casting) 316L/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>H</b>		501 ... 1 000 mm (19.72 ... 39.37 inch)		<b>9 R 1 H</b>
Stainless steel (electropolished) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>J</b>		1 001 ... 2 000 mm (39.41 ... 78.74 inch)		<b>9 R 1 J</b>
Stainless steel (electropolished) 316L/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>K</b>		2 001 ... 4 000 mm (78.78 ... 157.40 inch)		<b>9 R 1 K</b>
Stainless steel double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>L</b>		4 001 ... 5 000 mm (157.52 ... 196.85 inch)		<b>9 R 1 L</b>
Stainless steel double chamber/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>M</b>		5 001 ... 10 000 mm (196.89 ... 393.70 inch)		<b>9 R 1 M</b>
Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel	<b>N</b>		10 001 ... 15 000 mm (393.74 ... 590.55 inch)		<b>9 R 1 N</b>
			15 001 ... 20 000 mm (590.59 ... 787.40 inch)		<b>9 R 1 P</b>
			20 001 ... 25 000 mm (787.44 ... 984.25 inch)		<b>9 R 1 Q</b>
			25 001 ... 32 000 mm (984.29 ... 1 259.52 inch)		<b>9 R 1 R</b>

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG240</b>	<b>7ML5880-</b>	
Guided Wave Radar sensor for Hygienic and corrosive continuous level and interface measurement of liquids.		
Exchange rod ø 8 mm (0.31 inch)/1.4435 (BN2), electropolished (Ra < 0.38 µm)		
300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>6)</sup>		<b>9 R 2 A</b>
1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>6)</sup>		<b>9 R 2 B</b>
2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>6)</sup>		<b>9 R 2 C</b>
3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>6)</sup>		<b>9 R 2 D</b>

Selection and Ordering data	Order code
<b>Further designs (mandatory)</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
<b>Supplementary electronics</b>	
Without	<b>A00</b>
Additional current output 4 ... 20 mA <sup>10)</sup>	<b>A01</b>
<b>Indicating/adjustment module</b>	
Without	<b>E00</b>
Mounted	<b>E01</b>
Laterally mounted	<b>E02</b>
<b>Language of display</b>	
German	<b>L00</b>
English	<b>L01</b>
French	<b>L02</b>
Dutch	<b>L03</b>
Italian	<b>L04</b>
Spanish	<b>L05</b>
Portuguese	<b>L06</b>
Russian	<b>L07</b>
Chinese	<b>L08</b>
Japanese	<b>L09</b>
<b>Operating instructions</b>	
German	<b>M00</b>
English	<b>M01</b>
French	<b>M02</b>
Spanish	<b>M03</b>

Selection and Ordering data	Order code
<b>Further designs (optional)</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
Enter the total insertion length in plain text description	<b>Y01</b>
Enter the total length of rigid part (cable version only) range from 100 ... 1 000 mm	<b>Y02</b>
Cleaning included certificate: oil, grease and silicone free	<b>W01</b>
Remote electronic cable lengths: 2 m (6.6 ft). Only available with Housing options Q2A and Q2B	<b>Y10</b>
Remote electronic cable lengths: 5 m (16.4 ft). Only available with Housing options Q2A and Q2B	<b>Y11</b>
Remote electronic cable lengths: 10 m (32.8 ft). Only available with Housing options Q2A and Q2B	<b>Y12</b>
Identification label (measurement loop) stainless steel, 40 characters max, add in plain text. To add more than one line use a coma "," for line break.	<b>Y17</b>
Identification Label (measurement loop) foil, 40 characters max, add in plain text. To add more than one line use a coma "," for line break.	<b>Y18</b>
3.1-Inspection Certificate for instrument (EN 10204) <sup>8)</sup>	<b>C12</b>
NACE0175 to 3.1 Material Certificate for material (EN10204 NACE MR 0175) (NACE not in scope for Hygienic process connections) <sup>9),19)</sup>	<b>D07</b>
3.1-Inspection Certificate for instrument with test data (EN 10204) <sup>8)</sup>	<b>C25</b>
2.2-Factory certificate for material (EN 10204) <sup>8)</sup>	<b>C15</b>
Quality and test plan <sup>8)</sup>	<b>C26</b>
Dye penetration test, results confirmed via a 3.1 certificate/instrument (EN10204) <sup>8)</sup>	<b>C13</b>
X-ray test + 3.1 certificate/instrument <sup>8)</sup>	<b>C14</b>
Positive material identification test + 3.1 certificate/instrument <sup>8)</sup>	<b>C16</b>
Roughness test + 3.1 certificate/instrument <sup>8)</sup>	<b>C18</b>
Pressure test + 3.1 certificate/instrument <sup>8)</sup>	<b>C31</b>
Helium leak test + 3.1 certificate/instrument <sup>8)</sup>	<b>C32</b>
Ferrite measuring accuracy to DIN 32514-1 + 3.1 certificate/instrument <sup>8)</sup>	<b>C60</b>
Pressure test according to Norsok + 3.1 certificate/instrument <sup>8)</sup>	<b>C61</b>
5 point calibration certificate (min. length 1 000 mm) <sup>8)</sup>	<b>C62</b>

Selection and Ordering data	Article No.
<b>Operating Instructions</b>	
All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Accessories</b>	
SITRANS LG, GWR sensor Display Module	<b>A5E34143449</b>
SITRANS LG, two-wire 4 ... 20 mA/HART electronic	<b>A5E35637821</b>
SITRANS LG, USB communicator	<b>A5E35192015</b>
SITRANS LG, Mounting eye M12 x 20	<b>PBD:51041448</b>
SITRANS LG, Mounting spring	<b>PBD:51041449</b>
Siemens Intrinsically Safe Barrier (DC powered), ATEX II 1 G EEx ia	<b>7NG4124-0AA00</b>
SITRANS RD100, loop powered display - see Chapter 7	<b>7ML5741-...</b>
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	<b>7ML5740-...</b>
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	<b>7ML5744-...</b>
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	<b>7ML5750-...</b>
For applicable back up point level switch - see point level measurement section	

Note: some configuration options are not available.  
For restriction information see the online PIA configuration tool.

- 1) Some approvals are not available with Plastic and Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 2) Available only with Rod ø 10 mm/PFA and Cable ø 4 mm/PFA Length options.
- 3) Available only with Supplementary electronic option A00 and Indicating/adjustment module options E00, E01.
- 4) Not available with Remote Housing/Protection/Cable options Q2A and Q2B.
- 5) Not available with Electronic option 5.
- 6) Not available with Y02.
- 7) Available only with Electronic options 0, 2, and 6.
- 8) Listed Certificates are not available with all configurations, please contact factory for more information.
- 9) Available only with Supplementary electronic option A00.
- 10) Not available with Indicating/adjustment module option E02.
- 11) Available only with Electronics options 0, 2, and 5.
- 12) Some approvals are not available with Remote or Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 13) Available only with Double chamber, Metallic Housing/Protection/Cable options and certain glands.
- 14) Available only with Electronics options 0, 2, 5, 6.
- 15) Available only with Electronics options 0 and 2.
- 16) Available only with Electronics options 0 ... 4.
- 17) Not available with some Seal/Process Temperature options.
- 18) Available only with Electronic options 0, 2, 3, and 4.
- 19) Available only with 316L Probes. NACE is not available with coated, plated, or hygienic connections.

Note: Please consult manual for further detail.



# Level Measurement

Continuous level measurement  
Guided wave radar transmitters

## SITRANS LG series

4

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG250</b>	<b>7ML5881-</b>		<b>SITRANS LG250</b>	<b>7ML5881-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids.			A guided wave radar sensor for continuous level and interface measurement of liquids.		
➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.					
<b>Approvals</b>					
General purpose (CSA, FM, CE)	<b>0 A</b>		CSA (XP) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(9)(18)(19)(26)</sup>	<b>1 H</b>	
Shipping approval <sup>(4)(6)(7)(8)(9)</sup>	<b>0 B</b>		CSA (NI) Class I, II, III Div. 2, Groups A, B, C, D, F, G + Ship approval <sup>(1)(6)(10)</sup>	<b>7 K</b>	
Overfill protection (WHG; VLAREM) <sup>(9)(10)(11)(12)</sup>	<b>0 C</b>		CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + Ship approval <sup>(6)(10)(22)</sup>	<b>7 L</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 <sup>(12)(13)</sup>	<b>0 E</b>		CSA (XP-IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + Ship approval <sup>(6)(9)(15)(40)</sup>	<b>7 M</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC + Overfill (WHG; VLAREM) <sup>(10)(12)</sup>	<b>0 F</b>		CSA (XP) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + Ship approval <sup>(6)(9)(10)(19)(26)</sup>	<b>7 N</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 + shipping approval <sup>(4)(6)(8)(9)(10)(15)</sup>	<b>0 G</b>		NEPSI Ex ia IIC T6 <sup>(5)(13)</sup>	<b>2 A</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC + ATEX II 1D, 1/2D, 2D IP6x <sup>(1)(9)(14)</sup>	<b>0 H</b>		NEPSI Ex ia IIC T6 + DIP A20/21 TA T <sup>(*)9)(14)</sup>	<b>2 B</b>	
ATEX II 1/2G, 2G Ex d ia IIC T6 <sup>(2)(9)(15)(16)(17)</sup>	<b>0 J</b>		NEPSI Ex d ia IIC T6 <sup>(2)(9)(17)</sup>	<b>2 C</b>	
ATEX II 1/2G, 2G Ex d ia IIC + ATEX II 1/2D, 2D IP6x <sup>(2)(9)(15)(16)(17)</sup>	<b>0 K</b>		NEPSI Ex d ia IIC T6 + DIP A20/21 TA T <sup>(*)2)(9)(17)</sup>	<b>2 D</b>	
ATEX II 1/2G, 2G Ex d IIC T6 <sup>(1)(9)(18)(19)</sup>	<b>0 L</b>		NEPSI Ex d IIC T6 <sup>(9)(14)(19)(26)</sup>	<b>2 E</b>	
ATEX II 1/2G, 2G Ex d IIC + ATEX II 1/2D, 2D IP6x <sup>(1)(9)(19)(20)</sup>	<b>0 M</b>		NEPSI Ex d IIC T6 + DIP A20/21 TA T <sup>(*)9)(14)(19)(26)</sup>	<b>2 F</b>	
ATEX II 1D, 1/2D, 2D IP6x T <sup>(1)(9)(17)(19)</sup>	<b>0 N</b>		NEPSI DIP A20/21 TA T <sup>(*)9)(17)(19)</sup>	<b>2 G</b>	
ATEX II 1G, II 1/2G, II 2G Ex ia IIC T6...T1 Ga, Ga/Gb, Gb /IEC Ex ia IIC T6...T1 Ga, Ga/Gb, Gb <sup>(13)</sup>	<b>0 W</b>		INMETRO Ex ia IIC T6 ... T1 <sup>(5)(13)</sup>	<b>3 A</b>	
ATEX II 1/2G, II 2G Ex db IIC T6 ... T1 Ga/Gb, Gb / IEC Ex db IIC T6 ... T1 Ga/Gb, Gb <sup>(18)(19)(26)</sup>	<b>1 K</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex ia IIC T6, Ga, Ga/Gb <sup>(1)(9)(14)</sup>	<b>3 B</b>	
ATEX II 1/2G, II 2G Ex d ia IIC T6...T1 Ga/Gb, Gb + Ship approval <sup>(2)(6)(9)(14)(15)(16)</sup>	<b>7 A</b>		INMETRO Ex d ia IIC T6 ... T1 <sup>(2)(9)(17)</sup>	<b>3 C</b>	
ATEX II 1/2G, II 2G Ex db IIC T6...T1 Ga/Gb, Gb + Ship approval <sup>(1)(6)(9)(10)(15)</sup>	<b>7 B</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex d ia IIC T6 Ga/Gb <sup>(1)(9)(17)</sup>	<b>3 D</b>	
IEC Ex ia IIC T6 <sup>(12)(13)</sup>	<b>0 P</b>		INMETRO Ex d IIC T6 ... T1 <sup>(9)(13)(19)(26)</sup>	<b>3 E</b>	
IEC Ex ia IIC T6 + IEC IP6x T d <sup>(1)(9)(14)(19)</sup>	<b>0 Q</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db <sup>(9)(17)(19)(26)</sup>	<b>3 F</b>	
IEC Ex d ia IIC T6 <sup>(2)(9)(15)(16)(17)</sup>	<b>0 R</b>		KOSHA Ex d IIC T6 ... T1 - KE <sup>(9)(14)(19)(26)</sup>	<b>3 G</b>	
IEC Ex d ia IIC T6 + IEC IP6x T d <sup>(2)(9)(15)(16)(17)(21)</sup>	<b>0 S</b>		Korea KC ex free area	<b>4 A</b>	
IEC Ex d IIC T6 <sup>(1)(9)(18)(19)</sup>	<b>0 T</b>		GOST-R/EAC 0 Ex ia IIC T1 ... T6 X <sup>(13)</sup>	<b>6 A</b>	
IEC Ex d IIC T6 + IEC IP6x T d <sup>(1)(9)(19)</sup>	<b>0 U</b>		GOST-R/EAC 0 Ex ia IIC T1 ... T6 X + Ex t IIIC T ... IP66 <sup>(1)(14)</sup>	<b>5 A</b>	
IEC Ex db IIC T6 ... T1 Ga/Gb, Gb + Ship approval <sup>(1)(6)(9)(10)(19)</sup>	<b>7 C</b>		GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X <sup>(2)(9)(17)</sup>	<b>5 B</b>	
IEC Ex ia IIC T6 ... T1 Ga, Ga/Gb, Gb + Ship approval <sup>(6)(10)(22)</sup>	<b>7 D</b>		GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X + Ex t IIIC T ... IP66 <sup>(2)(9)(17)</sup>	<b>5 C</b>	
IEC Ex d ia IIC T6 ... T1 Ga/Gb, Gb + Ship approval <sup>(2)(6)(9)(14)(15)(21)</sup>	<b>7 E</b>		GOST-R/EAC 1 Ex d IIC T1 ... T6 X <sup>(14)(26)</sup>	<b>5 D</b>	
FM (NI) Class I, Div. 2, Groups A, B, C, D <sup>(3)(9)(17)(23)</sup>	<b>1 A</b>		GOST-R/EAC 0 Ex d IIC T1 ... T6 X + Ex t IIIC T ... IP66 <sup>(14)(26)</sup>	<b>5 E</b>	
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F <sup>(5)(9)(14)</sup>	<b>1 B</b>		GOST-R/EAC Ex t IIIC T ... IP66 <sup>(1)(17)</sup>	<b>5 F</b>	
FM (XP-AIS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(2)(9)(15)(16)(17)</sup>	<b>1 C</b>		<b>Note: Version/Material, Process fitting/ Material, and Length options are available only with options of corresponding type.</b>	<b>5 G</b>	
FM (XP) Class I, Div. 1, Groups A, B, C, D <sup>(9)(19)(20)(26)</sup>	<b>1 D</b>		<b>Probe version/Material</b>		
FM (NI) Class I, II, III, Div. 2, Groups A, B, C, D, F, G + Ship approval <sup>(6)(9)(14)(23)(41)</sup>	<b>7 F</b>		Probe exchangeable cable ø 2 mm (0.08 inch) with gravity weight/316L <sup>(11)(27)(28)</sup>	<b>A</b>	
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + Ship approval <sup>(6)(9)(14)(22)</sup>	<b>7 G</b>		Probe exchangeable cable ø 2 mm (0.08 inch) center weight/316L <sup>(11)(28)(29)</sup>	<b>B</b>	
FM (XP-AIS) Class I, Div. 1, Groups A, B, C, D, + Ship approval <sup>(6)(9)(14)(22)</sup>	<b>7 H</b>		Probe exchangeable cable ø 4 mm (0.16 inch) with gravity weight/316L <sup>(11)(27)(28)</sup>	<b>C</b>	
M (XP) Class I, Div. 1, Groups A, B, C, D + Ship approval <sup>(6)(14)(19)(26)</sup>	<b>7 J</b>		Probe exchangeable cable ø 4 mm (0.16 inch) with center weight/316L <sup>(11)(28)(29)</sup>	<b>D</b>	
CSA (NI) Class I, Div. 2, Groups A, B, C, D (DIP) Class II, III, Div. 1, Groups E, F, G <sup>(1)</sup>	<b>1 E</b>		Probe exchangeable rod ø 8 mm (0.31 inch)/316L <sup>(11)(27)</sup>	<b>E</b>	
CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(9)(13)</sup>	<b>1 F</b>		Probe exchangeable rod ø 12 mm (0.47 inch)/316L <sup>(11)(27)</sup>	<b>F</b>	
CSA (XP-IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(2)(9)(15)(16)(17)</sup>	<b>1 G</b>				

## Level Measurement

### Continuous level measurement

### Guided wave radar transmitters

#### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG250</b>	<b>7ML5881-</b>		<b>SITRANS LG250</b>	<b>7ML5881-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids.			A guided wave radar sensor for continuous level and interface measurement of liquids.		
Probe coax version ø 21.3 mm (0.84 inch) with single hole/316L <sup>(11)(27)(28)</sup>	<b>G</b>		Flange 3" 150 lb RF, ASME B16.5/316L	<b>4 0</b>	
Probe coax version ø 21.3 mm (0.84 inch) with multiple hole/316L <sup>(27)(28)</sup>	<b>H</b>		Flange 3" 300 lb RF, ASME B16.5/316L	<b>4 1</b>	
Probe coax version ø 42.2 mm (1.66 inch) with multiple hole/316L <sup>(11)(27)(28)</sup>	<b>K</b>		Flange 4" 150 lb RF, ASME B16.5/316L	<b>4 2</b>	
Probe exchangeable cable ø 4 mm (0.16 inch) with gravity weight/Alloy C22 (2.4602) <sup>(11)</sup>	<b>L</b>		Flange 4" 300 lb RF, ASME B16.5/316L	<b>4 3</b>	
Probe exchangeable cable ø 4 mm (0.16 inch) with centre weight/Alloy C22 (2.4602) <sup>(11)</sup>	<b>M</b>		Flange 6" 150 lb RF, ASME B16.5/316L	<b>4 4</b>	
Probe exchangeable rod ø 8 mm (0.31 inch)/Alloy C22 (2.4602) <sup>(11)</sup>	<b>N</b>		Flange 6" 300 lb RF, ASME B16.5/316L	<b>4 5</b>	
Probe exchangeable rod ø 12 mm (0.47 inch)/Alloy C22 (2.4602) <sup>(11)</sup>	<b>P</b>		Thread G 3/4" PN 40, DIN3852-A / Alloy C22 (2.4602)	<b>4 6</b>	
Probe coax version ø 21.3 mm (0.84 inch) with multiple hole/Alloy C22 (2.4602) <sup>(11)</sup>	<b>Q</b>		Thread G 1" PN 40, DIN 3852-A / Alloy C22 (2.4602)	<b>4 7</b>	
Probe coax version ø 42.2 mm (1.66 inch) with multiple hole/Alloy C22 (2.4602) <sup>(11)</sup>	<b>R</b>		Thread G 1 1/2" PN 40, DIN 3852-A / Alloy C22 (2.4602)	<b>4 8</b>	
Probe exchangeable rod ø 8 mm (0.31 inch)/Duplex (1.4462) <sup>(11)</sup>	<b>S</b>		Thread 1 1/2" NPT PN 40, ASME B1.20.1 / Alloy C22 (2.4602)	<b>5 0</b>	
Exchangeable rod ø 12 mm (0.47 inch)/Alloy C22 and 400 (2.4360) <sup>(11)</sup>	<b>T</b>		Flange DN 50 PN 40 Form C, DIN 2501 / 316L with Alloy C22 (2.4602) coating	<b>5 1</b>	
<b>Process fitting/Material</b>			Flange DN 50 PN 40 Form B1, EN 1092-1 / 316L with Alloy C22 (2.4602) coating	<b>5 2</b>	
Thread G 3/4" (DIN 3852-A) PN 6/316L	<b>0 0</b>		Flange DN 80 PN 40 Form B1, EN 1092-1 / 316L with Alloy C22 (2.4602) coating	<b>5 3</b>	
Thread 3/4" NPT (ASME B1.20.1) PN 6/316L	<b>0 1</b>		Flange DN 100 PN 40 Form B1, EN 1092-1 / 316L with Alloy C22 (2.4602) coating	<b>5 4</b>	
Thread G 3/4" (DIN 3852-A) PN 40/316L	<b>0 2</b>		Flange DN 150 PN 16 Form B1, EN 1092-1 / 316L with Alloy C22 (2.4602) coating	<b>5 5</b>	
Thread 3/4" NPT (ASME B1.20.1) PN 40/316L	<b>0 3</b>		Flange DN 200 PN 16 Form B1, EN 1092-1 / 316L with Alloy C22 (2.4602) coating	<b>5 6</b>	
Thread G 3/4" (DIN 3852-A) PN 100 / 316L <sup>(30)</sup>	<b>0 4</b>		Flange 2" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>5 7</b>	
Thread 3/4" NPT (ASME B1.20.1) PN 100 / 316L <sup>(30)</sup>	<b>0 5</b>		Flange 2" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>5 8</b>	
Thread G 1" (DIN 3852-A) PN 40/316L	<b>0 6</b>		Flange 3" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>6 0</b>	
Thread 1" NPT (ASME B1.20.1) PN 40/316L	<b>0 7</b>		Flange 4" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>6 1</b>	
Thread G 1" (DIN 3852-A) PN 100/316L <sup>(30)</sup>	<b>0 8</b>		Flange 4" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>6 2</b>	
Thread 1" NPT (ASME B1.20.1) PN 100/316L <sup>(30)</sup>	<b>1 0</b>		Flange 6" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>6 3</b>	
Thread G 1 1/2" (DIN 3852-A) PN 40/316L	<b>1 1</b>		Flange 6" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>6 4</b>	
Thread 1 1/2" NPT (ASME B1.20.1) PN 40/316L	<b>1 2</b>		Thread G 3/4" (DIN 3852-A) PN 40/Duplex 1.4462	<b>6 5</b>	
Thread G 1 1/2" (DIN 3852-A) PN 100/316L <sup>(30)</sup>	<b>1 3</b>		Flange DN 80 PN 40 Form F, DIN 2501/Duplex (1.4462)	<b>6 6</b>	
Thread 1 1/2" NPT (ASME B1.20.1) PN 100 / 316L <sup>(30)</sup>	<b>1 4</b>		Flange DN 50 PN 40 Form B1, EN 1092-1 / Duplex (1.4462)	<b>6 7</b>	
Thread 2 NPT PN 40, ASME B1.20.1/316L <sup>(31)(32)</sup>	<b>1 5</b>		Flange 1" 150 lb RF, ASME B16.5/Duplex (1.4462)	<b>6 8</b>	
Flange DN 25 PN 40 Form C, DIN 2501/316L	<b>2 0</b>		Flange 1 1/2" 150 lb RF, ASME B16.5/Duplex (1.4462)	<b>7 0</b>	
Flange DN 25 PN 40 Form F, DIN 2501/316L	<b>2 1</b>		Flange 2" 150 lb RF, ASME B16.5/Duplex (1.4462)	<b>7 1</b>	
Flange DN 40 PN 40 Form C, DIN 2501/316L	<b>2 2</b>		Flange 2" 300 lb RF, ASME B16.5/Duplex (1.4462)	<b>7 2</b>	
Flange DN 50 PN 40 Form C, DIN 2501/316L	<b>2 3</b>		Flange 2" 600 lb RF, ASME B16.5/Duplex (1.4462)	<b>7 3</b>	
Flange DN 50 PN 40 Form V13, DIN 2513/316L	<b>2 4</b>		Flange 3" 150 lb RF, ASME B16.5/Duplex (1.4462)	<b>7 4</b>	
Flange DN 80 PN 40 Form C, DIN 2501/316L	<b>2 5</b>		Flange 3" 300 lb RF, ASME B16.5/Duplex (1.4462)	<b>7 5</b>	
Flange DN 80 PN 40 Form V13, DIN 2501/316L	<b>2 6</b>				
Flange DN 100 PN 16 Form C, DIN 2501/316L	<b>2 7</b>				
Flange DN 100 PN 16 Form C, DIN 2501 / 316L	<b>2 8</b>				
Flange DN 100 PN 40 Form C, DIN 2501 / 316L	<b>3 0</b>				
Flange DN 100 PN 40 Form V13, DIN 2513 / 316L	<b>3 1</b>				
Flange DN 150 PN 16 Form C, DIN 2501/316L	<b>3 2</b>				
Flange DN 50 PN 40 EN 1092-1 Form B1/316L	<b>3 3</b>				
Flange DN 80 PN 40 EN 1092-1 Form B1/316L	<b>3 4</b>				
Flange 1" 150 lb RF, ASME B16.5/316L	<b>3 5</b>				
Flange 1 1/2" 150 lb RF, ASME B16.5/316L	<b>3 6</b>				
Flange 2" 150 lb RF, ASME B16.5/316L	<b>3 7</b>				
Flange 2" 300 lb RF, ASME B16.5/316L	<b>3 8</b>				

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG250</b>	<b>7ML5881-</b>		<b>SITRANS LG250</b>	<b>7ML5881-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids.			A guided wave radar sensor for continuous level and interface measurement of liquids.		
Flange 4" 150 lb RF, ASME B16.5/Duplex (1.4462)	7 6		<b>Electronics</b>		
Flange 4" 150 lb FF, ASME B16.5/Duplex (1.4462)	7 7		Two-wire 4 ... 20 mA/HART	0	
Flange 4" 300 lb RF, ASME B16.5/Duplex (1.4462)	7 8		Four-wire Modbus <sup>2)9)15)</sup>	1	
Flange 4" 600 lb RF, ASME B16.5/Duplex (1.4462)	8 0		Two-wire 4 ... 20 mA/HART with SIL qualification <sup>9)12)</sup>	2	
Thread 1 1/2" NPT PN 40, ASME B1.20.1/ Alloy 400 (2.4360)	8 1		Four-wire 4 ... 20 mA/HART; 90 ... 253 V AC; 50/60Hz <sup>2)9)15)42)</sup>	3	
Flange 2" 150 lb RF, ASME B16.5/Alloy 400 (2.4360)	8 2		Four-wire 4 ... 20 mA/HART; 9.6 ... 48 V DC; 20 ... 42 V AC <sup>2)9)15)42)</sup>	4	
Flange 2" 300 lb RF, ASME B16.5/Alloy 400 (2.4360) solid	8 3		PROFIBUS PA <sup>5)9)</sup>	5	
Flange 3" 150 lb RF, ASME B16.5/Alloy 400 (2.4360)	8 4		FOUNDATION Fieldbus <sup>5)9)</sup>	6	
Flange 3" 300 lb RF, ASME B16.5/Alloy 400 (2.4360)	8 5		<b>Seal/Second line of defense/ Process temperature</b>		
Flange 3" 300 lb RJF, ASME B16.5/Alloy 400 (2.4360)	8 6		FKM (SHS FPM 70C3 GLT)/without glass seal/-40 ... +80 °C (-40 ... +176 °F)	A	
Flange 4" 150 lb RF, ASME B16.5/Alloy 400 (2.4360)	8 7		FKM (SHS FPM 70C3 GLT)/without glass seal/-40 ... +150 °C (-40 ... +302 °F)	B	
Flange 4" 300 lb RF, ASME B16.5/Alloy 400 (2.4360)	8 8		FKM (SHS FPM 70C3 GLT)/with glass seal/-40 ... +150 °C (-40 ... +302 °F) <sup>34)</sup>	C	
Flange DN 25 PN 40 Form C, DIN 2501/ Alloy C22 (2.4602) solid	9 0	L 1 A	EPDM (A+P 75.5/KW75F)/without glass seal/-40 ... +80 °C (-40 ... +176 °F)	D	
Flange DN 25 PN 40 Form B1, EN 1092-1/ Alloy C22 (2.4602) solid	9 0	L 1 B	EPDM (A+P 75.5/KW75F)/with glass seal/-40 ... +150 °C (-40 ... +302 °F) <sup>34)</sup>	E	
Flange DN 80 PN 40 Form B1, EN 1092-1/ Alloy C22 (2.4602) solid	9 0	L 1 C	FFKM (Kalrez 6375)/with glass seal/-20 ... +200 °C (-4 ... +392 °F) <sup>34)</sup>	F	
Flange 1" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 D	EPDM (A+P 75.5/KW75F)/without glass seal/-40 ... +80 °C (-40 ... +176 °F)	G	
Flange 1 1/2" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 E	EPDM (A+P 75.5/KW75F)/without glass seal/-40 ... +150 °C (-40 ... +302 °F) <sup>34)</sup>	H	
Flange 1 1/2" 300 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 F	EPDM (A+P 75.5/KW75F)/with glass seal/-40 ... +150 °C (-40 ... +302 °F) <sup>34)</sup>	J	
Flange 2" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 G	Silicone FEP coated (A+P FEP-O-SEAL)/ without glass seal/-40 ... +80 °C (-40 ... +176 °F)	K	
Flange 2" 300 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 H	Silicone FEP coated (A+P FEP-O-SEAL)/ without glass seal/-40 ... +150 °C (-40 ... +302 °F)	L	
Flange 2" 600 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 J	Silicone FEP coated (A+P FEP-O-SEAL)/with glass seal/-40 ... +150 °C (-40 ... +302 °F) <sup>34)</sup>	M	
Flange 2" 1 500 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 K	With borosilicate glass lead through for volatile substances, e.g. ammonia/with glass seal/-60 ... +150 °C (-76 ... +302 °F) <sup>34)</sup>	N	
Flange 3" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 L	FFKM (Kalrez 6375)/without glass seal/-20 ... +200 °C (-4 ... +392 °F)	P	
Flange 3" 300 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 M	FKM (SHS FPM 70C3 GLT)/with glass seal/-40 ... 80 °C (-40 ... +176 °F) <sup>34)</sup>	Q	
Flange 3" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	9 0	L 1 N	<b>Housing/Protection/Cable</b>		
Flange 4" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 P	<b>Note: for installation of remote display, 7ML5840, with LG two chamber housing options, contact PVC</b>		
Flange 4" 150 lb FF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 Q	Plastic IP66/IP67 M20 x 1.5/blind stopper <sup>1)15)</sup>	A	
Flange 4" 300 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 R	Plastic IP66/IP67 1/2" NPT/blind stopper <sup>9)15)</sup>	B	
Flange 4" 300 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 S	Plastic 2-chamber/IP66/IP67/M20 x 1.5/blind stopper	G	
Flange 4" 300 lb LT, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 T	Plastic 2-chamber/IP66/IP67 /1/2" NPT/blind stopper	H	
Flange 4" 600 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 U	Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/ Blind stopper <sup>9)15)</sup>	C	
Flange 6" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 V	Aluminum/IP66/IP68 (0.2 bar) 1/2" NPT/Blind stopper <sup>9)15)</sup>	D	
Flange 2 1/2" 600 lb RF, Masoneilan/ Alloy C22 (2.4602) solid	9 0	L 1 W			
Flange 2" 600 lb RF, ASME B16.5/316/316L <sup>32)</sup>	9 0	L 1 X			
Flange 3" 600 lb RF, ASME B16.5/316/316L <sup>32)33)</sup>	9 0	L 1 Y			

**Level Measurement**  
Continuous level measurement  
Guided wave radar transmitters

**SITRANS LG series**

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG250</b>	<b>7ML5881-</b>		<b>SITRANS LG250</b>	<b>7ML5881-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids.			A guided wave radar sensor for continuous level and interface measurement of liquids.		
Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5 / Blind stopper		<b>E</b>	<b>Lengths</b>		
Aluminum double chamber/IP66/IP68 (0.2 bar) 1/2" NPT/Blind stopper		<b>F</b>	<u>Rod ø 8 mm/316L</u>		
Stainless Steel (precision casting) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/Blind stopper <sup>1)15)</sup>		<b>L</b>	300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>	<b>0</b>	
Stainless Steel (precision casting) 316L/IP66/IP68 (0.2 bar) 1/2" NPT/Blind stopper <sup>9)15)</sup>		<b>M</b>	1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>	<b>1</b>	
Stainless Steel (electropolished) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/Blind stopper <sup>9)15)</sup>		<b>N</b>	2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>	<b>2</b>	
Stainless Steel (electropolished) 316L/IP66/IP68 (0.2 bar) 1/2" NPT/Blind stopper <sup>9)15)</sup>		<b>P</b>	3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>	<b>3</b>	
Stainless Steel double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/Blind stopper		<b>Q</b>	4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>	<b>4</b>	
Stainless Steel double chamber/IP66/IP68 (0.2 bar) 1/2" NPT/Blind stopper		<b>R</b>	5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>	<b>5</b>	
Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/ Cable gland stainless steel <sup>9)15)</sup>		<b>S</b>	<u>Rod ø 8 mm/Duplex</u>		
Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/Cable gland stainless steel		<b>T</b>	300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>	<b>9 R 1 A</b>	
Stainless Steel (precision casting) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/Cable gland stainless steel <sup>15)36)</sup>		<b>U</b>	1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>	<b>9 R 1 B</b>	
Stainless Steel (electropolished) 316L/IP66/IP68 (0.2 bar) M20 x 1.5/Cable gland stainless steel <sup>15)36)</sup>		<b>V</b>	2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>	<b>9 R 1 C</b>	
Stainless steel single chamber (precision casting)/IP66/IP68 (0.2 bar) M20 x 1.5/ Cable gland brass nickel-plated		<b>W</b>	3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>	<b>9 R 1 D</b>	
Aluminum single chamber/IP66/IP68 (0.2 bar) M20 x 1.5/Cable gland brass nickel-plated		<b>X</b>	4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>	<b>9 R 1 E</b>	
Stainless steel single chamber (precision casting)/IP66/ IP68 (0.2 bar) M20 x 1.5/ Cable gland brass nickel-plated		<b>Y</b>	5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>	<b>9 R 1 F</b>	
Stainless steel double chamber / IP66/ IP68 (0.2 bar) M20 x 1.5 / Cable gland brass nickel-plated		<b>J</b>	<u>Rod ø 8 mm or ø 12 mm /Alloy C22 and 400</u>		
Aluminum single chamber/IP66/IP68 (0.2 bar) with M20 x 1.5/Plug connector Harting HAN 7D (straight)		<b>Z Q 1 A</b>	300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>	<b>9 R 1 J</b>	
Aluminum single chamber/IP66/IP68 (0.2 bar) with M20 x 1.5/Special HARTING plug (bent) according to Tier One (ZB7555)		<b>Z Q 1 B</b>	1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>	<b>9 R 1 K</b>	
Remote stainless steel single chamber housing, electropolished/IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>15)35)</sup>		<b>Z Q 2 A</b>	2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>	<b>9 R 1 L</b>	
Remote plastic single chamber housing / IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/ blind plug <sup>15)35)</sup>		<b>Z Q 2 B</b>	3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>	<b>9 R 1 M</b>	
			4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>	<b>9 R 1 N</b>	
			5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>	<b>9 R 1 P</b>	
			<u>Rod ø 12 mm/316L</u>		
			300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>	<b>9 R 2 A</b>	
			1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>	<b>9 R 2 B</b>	
			2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>	<b>9 R 2 C</b>	
			3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>	<b>9 R 2 D</b>	
			<u>Cable lengths ø 2 or 4 mm/316L</u>		
			501 ... 1 000 mm (19.72 ... 39.37 inch)	<b>9 R 2 E</b>	
			1 000 ... 5 000 mm (39.37 ... 196.85 inch)	<b>9 R 2 F</b>	
			5 001 ... 10 000 mm (196.89 ... 393.70 inch)	<b>9 R 2 G</b>	
			10 001 ... 15 000 mm (393.74 ... 590.55 inch)	<b>9 R 2 H</b>	
			15 001 ... 20 000 mm (590.59 ... 787.40 inch)	<b>9 R 2 J</b>	
			20 001 ... 25 000 mm (787.44 ... 984.25 inch)	<b>9 R 2 K</b>	
			25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)	<b>9 R 2 L</b>	
			30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)	<b>9 R 2 M</b>	
			35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)	<b>9 R 2 N</b>	
			40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)	<b>9 R 2 P</b>	
			45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)	<b>9 R 2 Q</b>	
			50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)	<b>9 R 2 R</b>	
			55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)	<b>9 R 2 S</b>	
			60 001 ... 65 000 mm (2 362.24 ... 2 559.06 inch)	<b>9 R 2 T</b>	
			65 001 ... 70 000 mm (2 559.09 ... 2 755.91 inch)	<b>9 R 2 U</b>	
			70 001 ... 75 000 mm (2 755.94 ... 2 952.76 inch)	<b>9 R 2 V</b>	



## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Order code
<b>SITRANS LG250</b>	<b>7ML5881-</b>		<b>Further designs (mandatory)</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids.			Please add "-Z" to Article No. and specify Order code(s).	
<u>Cable Lengths ø 2 mm or ø 4 mm/Alloy C22</u>			<b>Supplementary electronics</b>	
501 ... 1 000 mm (19.72 ... 39.37 inch)		9 R 4 A	Without	A00
1 001 ... 5 000 mm (39.41 ... 196.85 inch)		9 R 4 B	Additional current output 4 ... 20 mA <sup>15)</sup>	A01
5 001 ... 10 000 mm (196.89 ... 393.70 inch)		9 R 4 C	<b>Dimensions centering weight (diameter/height)</b>	
10 001 ... 15 000 mm (393.74 ... 590.55 inch)		9 R 4 D	Without	B00
15 001 ... 20 000 mm (590.59 ... 787.40 inch)		9 R 4 E	ø 40/30 mm	B01
20 001 ... 25 000 mm (787.44 ... 984.25 inch)		9 R 4 F	ø 45/30 mm (for 2 inch tubes)	B02
25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)		9 R 4 G	ø 75/30 mm (for 3 inch tubes)	B03
30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)		9 R 4 H	ø 95/30 mm (for 4 inch tubes)	B04
35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)		9 R 4 J	ø 40 mm/30 mm	B05
40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)		9 R 4 K	ø 1.57/1.18 inch (for 2 inch Schedule 160)	B06
45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)		9 R 4 L	ø 45 mm/30 mm (for 2 inch tubes)	B07
50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)		9 R 4 M	ø 1.77/1.18 inch (for 2 inch Schedule 40/80)	B08
55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)		9 R 4 N	ø 75 mm/30 mm (for 3 inch tubes)	
60 001 ... 65 000 mm (2 362.24 ... 2 559.06 inch)		9 R 4 P	ø 2.95/1.18 inch (for 3 inch Schedule 10/40)	
65 001 ... 70 000 mm (2 559.09 ... 2 755.91 inch)		9 R 4 Q	ø 95 mm/30 mm (for 4 inch tubes)	
70 001 ... 75 000 mm (2 755.94 ... 2 952.76 inch)		9 R 4 R	ø 3.74/1.18 inch (for 4 inch Schedule 80)	
<u>Coax ø 21.3 mm/316L</u>			<b>Rod mounted</b>	
300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>		9 R 3 A	Without Rod, applicable for coax or cable probe types only	C00
1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>		9 R 3 B	Mounted	C01
2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>		9 R 3 C	Not mounted	C02
3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>		9 R 3 D	<b>Indicating/adjustment module</b>	
4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>		9 R 3 E	Without	E00
5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>		9 R 3 F	Mounted	E01
<u>Coax ø 21.3 mm/Alloy C22</u>			Laterally mounted	E02
300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>		9 R 5 A	<b>Language of display</b>	
1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>		9 R 5 B	German	L00
2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>		9 R 5 C	English	L01
3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>		9 R 5 D	French	L02
4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>		9 R 5 E	Dutch	L03
5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>		9 R 5 F	Italian	L04
<u>Coax ø 42.2 mm/316L</u>			Spanish	L05
300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>		9 R 3 G	Portuguese	L06
1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>		9 R 3 H	Russian	L07
2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>		9 R 3 I	Chinese	L08
3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>		9 R 3 J	Japanese	L09
4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>		9 R 3 K	<b>Operating instructions</b>	
5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>		9 R 3 L	German	M00
<u>Coax ø 42.2 mm/Alloy C22</u>			English	M01
300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>37)</sup>		9 R 5 G	French	M02
1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>37)</sup>		9 R 5 H	Spanish	M03
2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>37)</sup>		9 R 5 I	<b>Further designs (optional)</b>	
3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>37)</sup>		9 R 5 J	Please add "-Z" to Article No. and specify Order code(s).	
4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>37)</sup>		9 R 5 K	Enter the total insertion length in plain text description	Y01
5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>37)</sup>		9 R 5 L	Enter the total length of rigid part (cable version only) range from 100 ... 1 000 mm	Y02
		9 R 5 M	Remote electronic cable lengths: 2 m (6.6 ft). Only available with Housing options Q2A and Q2B	Y10
			Remote electronic cable lengths: 5 m (16.4 ft). Only available with Housing options Q2A and Q2B	Y11
			Remote electronic cable lengths: 10 m (32.8 ft). Only available with Housing options Q2A and Q2B	Y12
			Identification Label (measurement loop) stainless steel, 40 characters max, add in plain text. To add more than one line use a coma "," for line break.	Y17
			Identification Label (measurement loop) foil, 40 characters max, add in plain text. To add more than one line use a coma "," for line break.	Y18
			3.1-Inspection Certificate for instrument (EN 10204) <sup>38)</sup>	C12

#### Selection and Ordering data

##### Further designs (optional), continued

Please add **"-Z"** to Article No. and specify Order code(s).

	Order code
NACE0175 to 3.1 Material Certificate for material (EN10204 NACE MR 0175) (NACE not in scope for Hygienic process connections) <sup>38,39)</sup>	<b>D07</b>
3.1-Inspection Certificate for instrument with test data (EN 10204) <sup>38)</sup>	<b>C25</b>
2.2-Factory certificate for material (EN 10204) <sup>38)</sup>	<b>C15</b>
Quality and test plan <sup>38)</sup>	<b>C26</b>
Dye penetration test, results confirmed via a 3.1 certificate/instrument (EN10204) <sup>38)</sup>	<b>C13</b>
X-ray test + 3.1 certificate/instrument <sup>38)</sup>	<b>C14</b>
Positive material identification test + 3.1 certificate/instrument <sup>38)</sup>	<b>C16</b>
Roughness test + 3.1 certificate/instrument <sup>38)</sup>	<b>C18</b>
Pressure test + 3.1 certificate/instrument <sup>38)</sup>	<b>C31</b>
Helium leak test + 3.1 certificate/instrument <sup>38)</sup>	<b>C32</b>
Pressure test according to Norsok + 3.1 certificate/instrument <sup>38)</sup>	<b>C61</b>
5 point calibration certificate (min. length 1 000 mm) <sup>38)</sup>	<b>C62</b>
Pressure test (acc. to ASME B31.1), incl. 3.1 Inspection certificate <sup>38)</sup>	<b>C63</b>
Certificate suitable for tropical regions with, all attachment parts of metal (2.1 factory certificate) <sup>38)</sup>	<b>C65</b>

##### Operating Instructions

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

##### Accessories

	Article No.
SITRANS LG, GWR sensor Display Module	<b>A5E34143449</b>
SITRANS LG, two-wire 4 ... 20 mA/HART electronic	<b>A5E35637821</b>
SITRANS LG, USB communicator	<b>A5E35192015</b>
SITRANS LG, Mounting eye M8 x 20	<b>A5E36653574</b>
SITRANS LG, Mounting eye M12 x 20	<b>PBD:51041448</b>
SITRANS LG, Mounting spring	<b>PBD:51041449</b>
Siemens Intrinsically Safe Barrier (DC powered), ATEX II 1 G EEx ia	<b>7NG4124-0AA00</b>
SITRANS RD100, loop powered display - see Chapter 7	<b>7ML5741-...</b>
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	<b>7ML5740-...</b>
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	<b>7ML5744-...</b>
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	<b>7ML5750-...</b>
For applicable back up point level switch - see point level measurement section	

Note: some configuration options are not available. For restriction information see the online PIA configuration tool.

- 1) Not available with Plastic and Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 2) Available only with Metallic, Double chamber Housing/Protection/Cable options and certain glands.
- 3) Not available with Remote or Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 4) Not available with Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 5) Not available with certain glands.
- 6) Not available with Version/Material option K, L, M, N, P, Q, R, S, T.
- 7) Available only with Electronic options 0, 1, 2, and 5.

- 8) Not available with Length options 3, 4, 5, R2C, and R2D.
- 9) Available only with Supplementary electronic option A00.
- 10) Available only with Electronic options 0, 2, and 5.
- 11) Not available with Seal/Second line of defense/Process temperature option N.
- 12) Not available with Housing/Protection/Cable option Q1B.
- 13) Available only with Electronic options 0, 2, 5, and 6.
- 14) Available only with Electronic options 0 and 2.
- 15) Not available with Indicating/adjustment module option E02.
- 16) Not available with Process fitting/Material options 00 and 01.
- 17) Available only with Electronic options 0 ... 4.
- 18) Not available with Modbus Electronic options.
- 19) Available only with Seal/Second line of defense/Process temperature options C, E, F, J, M, N, Q.
- 20) Available only with HART Electronic options.
- 21) Available only with Seal/Second line of defense/Process temperature options C, D, E, F, H, J, M, N, Q.
- 22) Not Available with Housing/Protection/Cable options W, X, Y, J, Q1A, and Q1B.
- 23) Not Available with Seal/Second line of defense/Process temperature option P.
- 25) Available only with Electronic options 0, 2, and 6.
- 26) Available only with Single chamber, Aluminum and Stainless steel (precision casting) Housing/Protection/Cable options.
- 27) Available only with Dimensions centering weight option B00.
- 28) Available only with Rod mounted option C00.
- 29) Not available with Dimensions centering weight option B00.
- 30) Available only with Seal/Second line of defense/Process temperature option N.
- 31) Not available with Version/Material options F, K, L, M, N, P, Q, R, S, and T.
- 32) Not available with Seal/Process temperature options A, G, K, N, and Q.
- 33) Available only with Version/Material options A ... K.
- 34) Not available with Remote Housing/Protection/Cable options.
- 35) Not available with some Seal/Process temperature options including glass.
- 36) Not available with Supplementary electronics options.
- 37) Not available with Y02.
- 38) Listed Certificates are not available with all configurations, please contact factory for more information.
- 39) Available only with 316L Probes. NACE is not available with coated, plated, or hygienic connections.
- 40) Available only with Housing/Protection/Cable options E, F, N, Q, R, T.
- 41) Available only with Housing/Protection/Cable options C, D, E, F, L, M, N, P, Q, R, S, T, U, V, Q2A, and Q2B.
- 42) Available only with Double chamber, Plastic and Metallic Housing/Protection/Cable options and certain glands.

Note: Please consult manual for further details.

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG260</b>	<b>7ML5882-</b>		<b>SITRANS LG260</b>	<b>7ML5882-</b>	
A guided wave radar sensor for level measurement of solids.			A guided wave radar sensor for level measurement of solids.		
➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.					
<b>Approvals</b>					
General purpose (CSA, FM, CE) <sup>(5)(6)</sup>	<b>0 A</b>		NEPSI Ex d IIC T6 + DIP A20/21 TA T <sup>(*)8)(9)(26)</sup>	<b>2 F</b>	
Shipping approval <sup>(4)(5)(7)(8)(9)</sup>	<b>0 B</b>		NEPSI DIP A20/21 TA T <sup>(*)9)(13)(15)</sup>	<b>2 G</b>	
Overfill protection (WHG; VLAREM) <sup>(5)(9)(10)</sup>	<b>0 C</b>		INMETRO Ex ia IIC T6 ... T10 <sup>(5)(11)</sup>	<b>3 A</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 <sup>(5)(11)</sup>	<b>0 E</b>		INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex ia IIC T6, Ga, Ga/Gb <sup>(1)(5)(8)(9)</sup>	<b>3 B</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC + Overfill (WHG; VLAREM) <sup>(5)(10)</sup>	<b>0 F</b>		INMETRO Ex d ia IIC T6 ... T1 <sup>(2)(5)(9)(13)</sup>	<b>3 C</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 + shipping approval <sup>(4)(5)(7)(8)(9)(12)</sup>	<b>0 G</b>		INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex d ia IIC T6 Ga/Gb <sup>(2)(5)(9)(13)</sup>	<b>3 D</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC + II 1D, 1/2D, 1/3D, 2D IP66 <sup>(1)(5)(8)(9)</sup>	<b>0 H</b>		INMETRO Ex d IIC T6 ... T1 <sup>(9)(11)(26)</sup>	<b>3 E</b>	
ATEX II 1/2G, 2G Ex d ia IIC T6 <sup>(2)(5)(9)(12)(13)</sup>	<b>0 J</b>		INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex d IIC T6 Ga/Gb <sup>(8)(9)(26)</sup>	<b>3 F</b>	
ATEX II 1/2G, 2G Ex d ia IIC + shipping approval <sup>(2)(5)(7)(9)(12)(14)</sup>	<b>0 L</b>		INMETRO Ex t IIC T* IP6X, Da, Da/Db, Da/Dc, Db <sup>(1)(5)(9)(13)</sup>	<b>3 G</b>	
ATEX II 1/2G, 2G Ex d ia IIC + II 1D, 1/2D, 1/3D, 2D IP66 <sup>(2)(5)(9)(12)(14)</sup>	<b>0 M</b>		KOSHA Ex d IIC T6 ... T1 – KE <sup>(8)(9)(26)</sup>	<b>4 A</b>	
ATEX II 1/2G, 2G Ex d IIC T6 <sup>(1)(9)(15)(16)</sup>	<b>0 N</b>		Korea KC ex free area	<b>6 A</b>	
ATEX II 1G, II 1/2G, II 2G Ex ia IIC T6...T1 Ga, Ga/Gb, Gb /IEC Ex ia IIC T6...T1 Ga, Ga/Gb, Gb <sup>(1)</sup>	<b>0 W</b>		GOST-R/EAC 0 Ex ia IIC T1 ... T6 X	<b>5 A</b>	
ATEX II 1/2G, 2G Ex d IIC + shipping approval <sup>(1)(7)(8)(9)(12)(16)</sup>	<b>0 Q</b>		GOST-R/EAC 0 Ex ia IIC T1 ... T6 X + Ex t IIC T... IP66 <sup>(1)(8)</sup>	<b>5 B</b>	
ATEX II 1/2G, 2G Ex d IIC + II 1D, 1/2D, 1/3D, 2D IP66 <sup>(1)(8)(9)(16)</sup>	<b>0 R</b>		GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X <sup>(2)(9)(13)</sup>	<b>5 C</b>	
ATEX II 1D, 1/2D, 2D IP6x T <sup>(1)(9)(16)(17)</sup>	<b>0 S</b>		GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X + Ex t IIC T... IP66 <sup>(2)(9)(13)</sup>	<b>5 D</b>	
IEC Ex ia IIC T6 <sup>(5)(11)</sup>	<b>0 T</b>		GOST-R/EAC 1 Ex d IIC T1 ... T6 X <sup>(8)(26)</sup>	<b>5 E</b>	
IEC Ex ia IIC T6...T1 Ga, Ga/Gb, Gb + Ex t IIC T <sup>(1)(8)(9)(16)</sup>	<b>0 U</b>		GOST-R/EAC 0 Ex d IIC T1 ... T6 X + Ex t IIC T... IP66 <sup>(8)(26)</sup>	<b>5 F</b>	
IEC Ex d ia IIC T6 <sup>(2)(5)(9)(12)(13)</sup>	<b>1 A</b>		GOST-R/EAC Ex t IIC T... IP66 <sup>(1)(13)</sup>	<b>5 G</b>	
IEC Ex d ia IIC T6 + IEC IP6x T <sup>(2)(5)(9)(12)(14)</sup>	<b>1 B</b>		<b>Note: Version/Material, Process fitting/Material, and Length options are available only with options of corresponding type.</b>		
IEC Ex db IIC T6 ... T1 Ga/Gb, Gb <sup>(1)(9)(15)(16)</sup>	<b>1 C</b>		<b>Probe version/Material</b>		
IEC Ex db IIC T6 ... T1 Ga/Gb, Gb + IEC Ex t IIC T <sup>(8)(9)(16)(26)</sup>	<b>1 D</b>		Probe exchangeable cable ø 4 mm (0.16 inch) with gravity weight/316 <sup>(20)(21)</sup>	<b>A</b>	
FM (NI) Class I, Div. 2, Groups A, B, C, D <sup>(3)(5)(9)(13)</sup>	<b>1 F</b>		Probe exchangeable cable ø 6 mm (0.24 inch) with gravity weight/316 <sup>(20)(21)</sup>	<b>B</b>	
FM (NI) Class I, Div. 2, Groups A, B, C, D + Ship approval <sup>(3)(5)(7)(9)(12)(14)</sup>	<b>1 G</b>		Probe exchangeable cable ø 6 mm (0.24 inch) with gravity weight/PA coated <sup>(22)</sup>	<b>C</b>	
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F <sup>(5)(8)(9)</sup>	<b>1 H</b>		Probe exchangeable cable ø 11 mm (0.43 inch) with gravity weight/PA coated <sup>(22)</sup>	<b>D</b>	
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + shipping approval <sup>(4)(5)(7)(8)(9)(12)</sup>	<b>1 J</b>		Probe exchangeable rod ø 16 mm (0.63 inch)/316L <sup>(20)</sup>	<b>E</b>	
FM (XP-AIS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(2)(5)(9)(12)(13)</sup>	<b>1 K</b>		<b>Process fitting/Material</b>		
FM (XP-AIS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + shipping approval <sup>(2)(5)(7)(9)(12)(14)</sup>	<b>1 L</b>		Thread G 3/4" (DIN 3852-A) PN 40/316L	<b>0 0</b>	
FM (XP) Class I, Div. 1, Groups A, B, C, D <sup>(8)(9)(18)(26)</sup>	<b>1 M</b>		Thread 3/4" NPT (ASME B1.20.1) PN 40/316L	<b>0 1</b>	
CSA (NI) Class I, Div. 2, Groups A, B, C, D; (DIP) Class II, III, Div. 1, Groups E, F, G <sup>(1)(5)(19)</sup>	<b>1 N</b>		Thread G 1" (DIN 3852-A) PN 40/316L	<b>0 2</b>	
CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(5)(15)</sup>	<b>1 P</b>		Thread 1" NPT (ASME B1.20.1) PN 40/316L	<b>0 3</b>	
CSA (XP-IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(2)(5)(9)(12)(13)</sup>	<b>1 Q</b>		Thread G 1 1/2" (DIN 3852-A) PN 40/316L	<b>0 4</b>	
CSA (XP) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(9)(15)(16)(26)</sup>	<b>1 R</b>		Thread 1 1/2" NPT (ASME B1.20.1) PN 40/316L	<b>0 5</b>	
NEPSI Ex ia IIC T6 <sup>(5)(11)</sup>	<b>2 A</b>		Thread G 2" (DIN 3852-A) PN 40/316L	<b>0 6</b>	
NEPSI Ex ia IIC T6 + DIP A20/21 TA T <sup>(*)1)(5)(8)(9)</sup>	<b>2 B</b>		Flange DN 50 PN 40 Form C, DIN 2501/316L	<b>1 0</b>	
NERSI Ex d ia IIC T6 <sup>(2)(5)(9)(13)</sup>	<b>2 C</b>		Flange DN 80 PN 40 Form C, DIN 2501/316L	<b>1 2</b>	
NEPSI Ex d ia IIC T6 + DIP A20/21 TA T <sup>(*)2)(5)(9)(13)</sup>	<b>2 D</b>		Flange DN 100 PN 16 Form C, DIN 2501/316L	<b>1 3</b>	
NEPSI Ex d IIC T6 <sup>(8)(9)(26)</sup>	<b>2 E</b>		Flange DN 100 PN 40 Form C, DIN 2501/316L	<b>1 4</b>	
			Flange DN 150 PN 16 Form C, DIN 2501/316L	<b>1 5</b>	
			Flange DN 50 PN 40 EN 1092-1 Form B1/316L	<b>1 6</b>	
			Flange DN 80 PN 40 EN 1092-1 Form B1/316L	<b>1 7</b>	
			Flange DN 100 PN 16 EN 1092-1 Form B1/316L	<b>1 8</b>	
			Flange 2" 150 lb RF, ASME B16.5/316L	<b>3 0</b>	
			Flange 2" 300 lb RF, ASME B16.5/316L	<b>3 2</b>	
			Flange 3" 150 lb RF, ASME B16.5/316L	<b>3 3</b>	


Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG260</b>	<b>7ML5882-</b>		<b>SITRANS LG260</b>	<b>7ML5882-</b>	
A guided wave radar sensor for level measurement of solids.			A guided wave radar sensor for level measurement of solids.		
Flange 3" 300 lb RF, ASME B16.5/316L	<b>3 4</b>		Stainless steel (precision casting) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel <sup>9)12)</sup>		<b>S</b>
Flange 4" 150 lb RF, ASME B16.5/316L	<b>3 5</b>		Stainless steel (electropolished) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel <sup>9)12)</sup>		<b>T</b>
Flange 4" 300 lb RF, ASME B16.5/316L	<b>3 6</b>		Aluminum single chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>W</b>
Flange 6" 150 lb RF, ASME B16.5/316L	<b>3 7</b>		Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>X</b>
<b>Electronics</b>			Stainless steel single chamber (precision casting)/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>Y</b>
Two-wire 4 ... 20 mA/HART	<b>0</b>		Stainless steel double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		<b>U</b>
Four-wire Modbus <sup>2)9)12)</sup>	<b>1</b>		Remote stainless steel single chamber housing, electropolished/IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>12)</sup>		<b>Z Q 2 A</b>
Two-wire 4 ... 20 mA/HART with SIL qualification <sup>9)</sup>	<b>2</b>		Remote plastic single chamber housing / IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>12)</sup>		<b>Z Q 2 B</b>
Four-wire 4 ... 20 mA/HART; 90 ... 253 V AC; 50/60 Hz <sup>2)9)12)</sup>	<b>3</b>				
Four-wire 4 ... 20 mA/HART; 9.6 ... 48 V DC; 20 ... 42 V AC <sup>2)9)12)</sup>	<b>4</b>		<b>Lengths</b>		
PROFIBUS PA <sup>9)</sup>	<b>5</b>		<u>Rod ø 16 mm/316L</u>		
FOUNDATION Fieldbus <sup>9)</sup>	<b>6</b>		500 mm (19.69 inch)		<b>0</b>
<b>Seal/Process temperature</b>			501 ... 1 000 mm (19.72 ... 39.37 inch)		<b>1</b>
FKM (SHS FPM 70C3 GLT)/-40 ... +80 °C (-40 ... +176 °F) <sup>23)</sup>	<b>A</b>		1 001 ... 2 000 mm (39.41 ... 78.74 inch)		<b>2</b>
FKM (SHS FPM 70C3 GLT)/-40 ... +150 °C (-40 ... +302 °F)	<b>B</b>		2 001 ... 3 000 mm (78.78 ... 118.11 inch)		<b>3</b>
FFKM (Kalrez 6375)/-20 ... +200 °C (-4 ... +392 °F)	<b>C</b>		3 001 ... 4 000 mm (118.15 ... 157.48 inch)		<b>4</b>
EPDM (A+P 75.5/KW75F)/-40 ... +80 °C (-40 ... +176 °F) <sup>23)</sup>	<b>D</b>		4 001 ... 5 000 mm (157.52 ... 196.85 inch)		<b>5</b>
EPDM (A+P 75.5/KW75F)/without/ -40 ... +150 °C (-40 ... +392 °F)	<b>E</b>		5 001 ... 6 000 mm (196.89 ... 236.22 inch)		<b>6</b>
<b>Housing/Protection/Cable</b>			<u>Cable lengths ø 4 mm/316</u>		
<b>Note: for installation of remote display, 7ML5840, with LG two chamber housing options, contact PVC</b>			501 ... 1 000 mm (19.72 ... 39.37 inch)		<b>9 R 2 E</b>
Plastic IP66/IP67 M20 x 1.5/blind stopper <sup>9)12)</sup>	<b>A</b>		1 001 ... 5 000 mm (39.41 ... 196.85 inch)		<b>9 R 2 F</b>
Plastic IP66/IP67 1/2" NPT/blind stopper <sup>9)12)</sup>	<b>B</b>		5 001 ... 10 000 mm (196.89 ... 393.70 inch)		<b>9 R 2 G</b>
Plastic 2-chamber/IP66/IP67/M20 x 1.5/blind stopper	<b>C</b>		10 001 ... 15 000 mm (393.74 ... 590.55 inch)		<b>9 R 2 H</b>
Plastic 2-chamber/IP66/IP67/ 1/2" NPT/blind stopper	<b>D</b>		15 001 ... 20 000 mm (590.59 ... 787.40 inch)		<b>9 R 2 J</b>
Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper <sup>9)12)</sup>	<b>E</b>		20 001 ... 25 000 mm (787.44 ... 984.25 inch)		<b>9 R 2 K</b>
Aluminum/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper <sup>9)12)</sup>	<b>F</b>		25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)		<b>9 R 2 L</b>
Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>G</b>		30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)		<b>9 R 2 M</b>
Aluminum double chamber/IP66/ IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>H</b>		35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)		<b>9 R 2 N</b>
Stainless Steel (precision casting) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/blind stopper <sup>9)12)</sup>	<b>J</b>		40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)		<b>9 R 2 P</b>
Stainless steel (precision casting) 316L/IP66/ IP68 (0.2 bar) 1/2" NPT/blind stopper <sup>9)12)</sup>	<b>K</b>		45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)		<b>9 R 2 Q</b>
Stainless steel (electropolished) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/blind stopper <sup>9)12)</sup>	<b>L</b>		50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)		<b>9 R 2 R</b>
Stainless steel (electropolished) 316L/IP66/ IP68 (0.2 bar) 1/2" NPT/blind stopper <sup>9)12)</sup>	<b>M</b>		55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)		<b>9 R 2 S</b>
Stainless steel double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper	<b>N</b>		<u>Cable lengths ø 6 mm/316L</u>		
Stainless steel double chamber/IP66/ IP68 (0.2 bar) 1/2" NPT/blind stopper	<b>P</b>		500 mm (19.69 inch)		<b>9 R 4 A</b>
Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/ cable gland stainless steel <sup>9)12)</sup>	<b>Q</b>		501 ... 1 000 mm (19.72 ... 39.37 inch)		<b>9 R 4 B</b>
Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel	<b>R</b>		1 001 ... 5 000 mm (39.41 ... 196.85 inch)		<b>9 R 4 C</b>
			5 001 ... 10 000 mm (196.89 ... 393.70 inch)		<b>9 R 4 D</b>



## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Order code
<b>SITRANS LG260</b>	<b>7ML5882-</b>		<b>Further designs (mandatory)</b>	
A guided wave radar sensor for level measurement of solids.			Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
10 001 ... 15 000 mm (393.74 ... 590.55 inch)		9 R 4 E	<b>Supplementary electronics</b>	A00
15 001 ... 20 000 mm (590.59 ... 787.40 inch)		9 R 4 F	Without	A01
20 001 ... 25 000 mm (787.44 ... 984.25 inch)		9 R 4 G	Additional current output 4 ... 20 mA <sup>12)</sup>	
25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)		9 R 4 H	<b>Rod mounted</b>	C00
30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)		9 R 4 J	Without Rod, applicable for coax or cable probe types only	C01
35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)		9 R 4 K	Mounted	C02
40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)		9 R 4 L	Not mounted	
45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)		9 R 4 M	<b>Indicating/adjustment module</b>	E00
50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)		9 R 4 N	Without	E01
55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)		9 R 4 P	Mounted	E02
<u>Cable lengths ø 6 mm or ø 11 mm/PA coated</u>			Laterally mounted	
501 ... 1 000 mm (19.72 ... 39.37 inch)		9 R 6 A	<b>Language of display</b>	L00
1 001 ... 5 000 mm (39.41 ... 196.85 inch)		9 R 6 B	German	L01
5 001 ... 10 000 mm (196.89 ... 393.70 inch)		9 R 6 C	English	L02
10 001 ... 15 000 mm (393.74 ... 590.55 inch)		9 R 6 D	French	L03
15 001 ... 20 000 mm (590.59 ... 787.40 inch)		9 R 6 E	Dutch	L04
20 001 ... 25 000 mm (787.44 ... 984.25 inch)		9 R 6 F	Italian	L05
25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)		9 R 6 G	Spanish	L06
30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)		9 R 6 H	Portuguese	L07
35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)		9 R 6 J	Russian	L08
40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)		9 R 6 K	Chinese	L09
45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)		9 R 6 L	Japanese	
50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)		9 R 6 M	<b>Operating instructions</b>	M00
55 001 ... 65 000 mm (2 165.39 ... 2 559.06 inch)		9 R 6 N	German	M01
			English	M02
			French	M03
			Spanish	
			<b>Selection and Ordering data</b>	Order code
			<b>Further designs (optional)</b>	
			Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
			Enter the total insertion length in plain text description	Y01
			Remote electronic cable lengths: 2 m (6.6 ft). Only available with Housing options Q2A and Q2B.	Y10
			Remote electronic cable lengths: 5 m (16.4 ft). Only available with Housing options Q2A and Q2B.	Y11
			Remote electronic cable lengths: 10 m (32.8 ft). Only available with Housing options Q2A and Q2B.	Y12
			Identification Label (measurement loop) stainless steel, 40 characters max, add in plain text. To add more than one line use a coma ",", for line break.	Y17
			Identification Label (measurement loop) foil, 40 characters max, add in plain text. To add more than one line use a coma ",", for line break.	Y18
			3.1-Inspection Certificate for instrument (EN 10204) <sup>24)</sup>	C12
			NACE0175 to 3.1 Material Certificate for material (EN10204 NACE MR 0175) (NACE not in scope for Hygienic process connections) <sup>24)25)</sup>	D07
			3.1-Inspection Certificate for instrument with test data (EN 10204) <sup>24)</sup>	C25
			2.2-Factory certificate for material (EN 10204) <sup>24)</sup>	C15
			Quality and test plan <sup>24)</sup>	C26
			Dye penetration test, results confirmed via a 3.1 certificate/instrument (EN10204) <sup>24)</sup>	C13
			X-ray test + 3.1 certificate/instrument <sup>24)</sup>	C14
			Positive material identification test + 3.1 certificate/instrument <sup>24)</sup>	C16

Selection and Ordering data	Order code
Roughness test + 3.1 certificate/instrument <sup>24)</sup>	<b>C18</b>
Pressure test + 3.1 certificate/instrument <sup>24)</sup>	<b>C31</b>
Helium leak test + 3.1 certificate/instrument <sup>24)</sup>	<b>C32</b>
Pressure test according to Norsok + 3.1 certificate/instrument <sup>24)</sup>	<b>C61</b>
5 point calibration certificate (min. length 1 000 mm) <sup>24)</sup>	<b>C62</b>
<b>Operating Instructions</b>	
All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Accessories</b>	
SITRANS LG, GWR sensor Display Module	<b>Article No.</b> <b>A5E34143449</b>
SITRANS LG, two-wire 4 ... 20 mA/HART electronic	<b>A5E35637821</b>
SITRANS LG, USB communicator	<b>A5E35192015</b>
SITRANS LG, Mounting eye M12 x 20	<b>PBD:51041448</b>
SITRANS LG, Mounting spring	<b>PBD:51041449</b>
Siemens Intrinsically Safe Barrier (DC powered), ATEX II 1 G EEx ia	<b>7NG4124-0AA00</b>
SITRANS RD100, loop powered display - see Chapter 7	<b>7ML5741-...</b>
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	<b>7ML5740-...</b>
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	<b>7ML5744-...</b>
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	<b>7ML5750-...</b>
For applicable back up point level switch - see point level measurement section	

Note: some configuration options are not available. For restriction information see the online PIA configuration tool.

- 1) Not available with Plastic and Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 2) Available only with Double chamber, Metallic Housing/Protection/Cable options and certain glands.
- 3) Not available with Remote and Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 4) Not available with Stainless steel (electropolished) Housing/Protection/Cable options and certain glands.
- 5) Not available with Seal/Process temperature option C.
- 6) Not available with Housing/Protection/Cable options W, X, Y, and U.
- 7) Not available with Probe version/Material option E.
- 8) Available only with Electronic options 0 and 2.
- 9) Available only with Supplementary electronic option A00.
- 10) Available only with Electronic options 0, 2, and 5.
- 11) Available only with Electronic options 0, 2, 5, and 6.
- 12) Not available with Indicating/adjustment module option E02.
- 13) Available only with Electronic options 0 ... 4.
- 14) Available only with Electronic options 0, 1, and 2.
- 15) Available only with Electronic options 0, 2, and 6.
- 16) Not available with Seal/Process temperature options B and E.
- 17) Available only with HART Electronic options.
- 18) Available only with Seal/Process temperature option C.
- 19) Not available with PROFIBUS PA Electronic options.
- 20) Not available with Seal/Process temperature options A and D.
- 21) Available only with Rod mounted option C00.
- 22) Available only with Seal/Process temperature options A and D.
- 23) Not available with Housing/Protection/Cable options Q2A and Q2B.
- 24) Listed Certificates are not available with all configurations, please contact factory for more information.
- 25) Available only with 316L Probes. NACE is not available with coated, plated, or hygienic connections.
- 26) Available only with Single chamber, Aluminum and Stainless steel (precision casting) Housing/Protection/Cable options.

Note: Please consult manual for further details.

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG270</b>	<b>7ML5883-</b>		<b>SITRANS LG270</b>	<b>7ML5883-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications			A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications		
➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.					
<b>Approvals</b>					
General purpose (CSA, FM, CE)	<b>0 A</b>		CSA (NI) Class I, II, III Div. 2, Groups A, B, C, D, F, G + Ship approval <sup>(3)9)14)</sup>	<b>7 K</b>	
Shipping approval <sup>(1)3)4)5)6)</sup>	<b>0 B</b>		CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + Ship approval <sup>(14)20)</sup>	<b>7 L</b>	
Overfill protection (WHG; VLAREM) <sup>(3)5)6)</sup>	<b>0 C</b>		CSA (XP-IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + Ship approval <sup>(3)5)8)10)11)14)</sup>	<b>7 M</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 <sup>(7)</sup>	<b>0 E</b>		NEPSI Ex ia IIC T6 <sup>(3)7)</sup>	<b>2 A</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC + Overfill (WHG; VLAREM) <sup>(3)6)</sup>	<b>0 F</b>		NEPSI Ex ia IIC T6 + DIP A20/21 TA T* <sup>(2)3)5)9)</sup>	<b>2 B</b>	
ATEX II 1G, 1/2G, 2G Ex ia IIC T6 + shipping approval <sup>(1)3)4)5)6)8)</sup>	<b>0 G</b>		NERSI Ex d ia IIC T6 <sup>(3)5)10)11)</sup>	<b>2 C</b>	
ATEX II 1G, 1/2G 2G Ex ia IIC + ATEX II 1D, 1/2D, 2D IP6x <sup>(2)5)9)</sup>	<b>0 H</b>		NEPSI Ex d ia IIC T6 + DIP A20/21 TA T* <sup>(3)5)10)11)</sup>	<b>2 D</b>	
ATEX II 1/2G, 2G Ex d ia IIC T6 <sup>(5)8)10)11)</sup>	<b>0 J</b>		NEPSI Ex d IIC T6 <sup>(2)3)5)16)</sup>	<b>2 E</b>	
ATEX II 1/2G, 2G Ex d ia IIC + shipping approval <sup>(1)3)5)8)11)12)</sup>	<b>0 L</b>		NEPSI Ex d IIC T6 + DIP A20/21 TA T* <sup>(2)3)5)16)</sup>	<b>2 F</b>	
ATEX II 1/2G, 2G Ex d ia IIC + ATEX II 1/2D, 2D IP6x <sup>(5)8)10)11)</sup>	<b>0 M</b>		NEPSI DIP A20/21 TA T* <sup>(3)5)9)10)</sup>	<b>2 G</b>	
ATEX II 1/2G, 2G Ex d IIC T6 <sup>(5)9)17)</sup>	<b>0 N</b>		INMETRO Ex ia IIC T6 ... T1 <sup>(7)</sup>	<b>3 A</b>	
ATEX II 1G, II 1/2G, II 2G Ex ia IIC T6...T1 Ga, Ga/Gb, Gb /IEC Ex ia IIC T6 ... T1 Ga, Ga/Gb, Gb <sup>(3)7)</sup>	<b>0 W</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex ia IIC T6, Ga, Ga/Gb <sup>(2)5)9)</sup>	<b>3 B</b>	
ATEX II 1/2G, 2G Ex d IIC + ship approval <sup>(1)3)5)6)8)9)</sup>	<b>0 Q</b>		INMETRO Ex d ia IIC T6 ... T1 <sup>(5)10)11)</sup>	<b>3 C</b>	
ATEX II 1/2G, 2G Ex d IIC + ATEX II 1/2D, 2D IP6x <sup>(5)9)13)</sup>	<b>0 R</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex d ia IIC T6 Ga/Gb <sup>(5)10)11)</sup>	<b>3 D</b>	
ATEX II 1D, 1/2D, 2D IP6x T <sup>(5)9)13)</sup>	<b>0 S</b>		INMETRO Ex d IIC T6 ... T1 <sup>(5)7)16)</sup>	<b>3 E</b>	
IEC Ex ia IIC T6 <sup>(7)</sup>	<b>0 T</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db + Ex d IIC T6 Ga/Gb <sup>(2)5)16)</sup>	<b>3 F</b>	
IEC Ex ia IIC T6 + IEC IP6x T tD <sup>(2)5)9)</sup>	<b>0 U</b>		INMETRO Ex t IIIC T* IP6X, Da, Da/Db, Da/Dc, Db <sup>(9)10)</sup>	<b>3 G</b>	
IEC Ex d ia IIC T6 <sup>(5)8)10)11)</sup>	<b>1 A</b>		KOSHA Ex d IIC T6 ... T1 – KE <sup>(2)3)5)16)</sup>	<b>4 A</b>	
IEC Ex d ia IIC T6 + IEC IP6x T tD <sup>(5)8)10)11)</sup>	<b>1 B</b>		Korea KC ex free area	<b>6 A</b>	
IEC Ex d IIC T6 <sup>(3)5)9)17)</sup>	<b>1 C</b>		GOST-R/EAC 0 Ex ia IIC T1 ... T6 X <sup>(3)7)21)</sup>	<b>5 A</b>	
IEC Ex d IIC T6 + IEC IP6x T tD <sup>(3)5)9)13)</sup>	<b>1 D</b>		GOST-R/EAC 0 Ex ia IIC T1 ... T6 X + Ex t IIIC T ... IP66 <sup>(2)3)9)</sup>	<b>5 B</b>	
IEC Ex db IIC T6 ... T1 Ga/Gb, Gb + Ship approval <sup>(3)5)9)14)17)</sup>	<b>7 C</b>		GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X <sup>(3)5)10)11)</sup>	<b>5 C</b>	
IEC Ex ia IIC T6 ... T1 Ga, Ga/Gb, Gb + Ship approval <sup>(7)14)20)</sup>	<b>7 D</b>		GOST-R/EAC 1 Ex d ia IIC T1 ... T6 X + Ex t IIIC T ... IP66 <sup>(3)5)10)11)</sup>	<b>5 D</b>	
IEC Ex d ia IIC T6 ... T1 Ga/Gb, Gb + Ship approval <sup>(5)8)10)11)14)</sup>	<b>7 E</b>		GOST-R/EAC 1 Ex d IIC T1 ... T6 X <sup>(2)3)16)</sup>	<b>5 E</b>	
FM (NI) Class I, Div. 2, Groups A, B, C, D <sup>(5)10)15)</sup>	<b>1 F</b>		GOST-R/EAC 0 Ex d IIC T1 ... T6 X + Ex t IIIC T ... IP66 <sup>(2)3)16)</sup>	<b>5 F</b>	
FM (NI) Class I, Div. 2, Groups A, B, C, D + ship approval <sup>(1)3)5)8)11)12)</sup>	<b>1 G</b>		GOST-R/EAC Ex t IIIC T ... IP66 <sup>(3)10)22)</sup>	<b>5 G</b>	
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F <sup>(2)5)</sup>	<b>1 H</b>		<b>Note: Version/Material, Process fitting/ Material, and Length options are available only with options of corresponding type.</b>		
FM (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + ship approval <sup>(1)2)3)4)5)8)</sup>	<b>1 J</b>		<b>Version/Material</b>		
FM (XP-AIS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(5)8)10)11)</sup>	<b>1 K</b>		Probe exchangeable cable ø 2 mm (0.08 inch) with gravity weight/316 <sup>(23)24)25)</sup>	<b>A</b>	
FM (XP-AIS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G + shipping approval <sup>(1)3)5)8)11)12)</sup>	<b>1 L</b>		Probe exchangeable cable ø 2 mm (0.08 inch) center weight/316L <sup>(23)25)26)</sup>	<b>B</b>	
FM (XP) Class I, Div. 1, Groups A, B, C, D <sup>(5)13)16)</sup>	<b>1 M</b>		Probe exchangeable cable ø 4 mm (0.16 inch) with gravity weight/316L <sup>(23)24)25)</sup>	<b>C</b>	
CSA (NI) Class I, Div. 2, Groups A, B, C, D; (DIP) Class II, III, Div. 1, Groups E, F, G <sup>(3)9)</sup>	<b>1 N</b>		Probe exchangeable cable ø 4 mm (0.16 inch) with center weight/316L <sup>(23)25)26)</sup>	<b>D</b>	
CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(3)7)</sup>	<b>1 P</b>		Probe exchangeable rod ø 16 mm (0.63 inch)/316L <sup>(24)27)28)</sup>	<b>E</b>	
CSA (XP-IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(3)5)8)10)11)</sup>	<b>1 Q</b>		Probe coax version ø 42.2 mm (1.66 inch) with multiple hole/316L <sup>(24)25)28)</sup>	<b>F</b>	
CSA (XP) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G <sup>(3)5)16)19)</sup>	<b>1 R</b>		Probe coax version ø 42.2 mm (1.66 inch); multiple hole; reference distances/316L <sup>(24)25)28)29)34)</sup>	<b>G</b>	
			Probe exchangeable cable ø 4 mm (0.16 inch) with gravity weight/ Alloy C22 (2.4602) <sup>(30)</sup>	<b>H</b>	
			Probe exchangeable rod ø 16 mm (0.63 inch)/Alloy C22 (2.4602) <sup>(30)</sup>	<b>J</b>	
			Coax version ø 42.2 mm (1.66 inch) with multiple hole/Alloy C22 (2.4602) <sup>(30)</sup>	<b>K</b>	

## Level Measurement

### Continuous level measurement Guided wave radar transmitters

#### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG270</b>	<b>7ML5883-</b>		<b>SITRANS LG270</b>	<b>7ML5883-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications			A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications		
Exchangeable rod, diameter 8 mm (0.32 inch)/316L <sup>27)</sup> 31)	<b>L</b>		Flange DN 80 PN 63, EN 1092-1 Form B2/316L	<b>67</b>	
Coax ø 21.3 mm (0.838 inch) with multiple hole/316L <sup>31)</sup>	<b>M</b>		Flange 4" 600 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>68</b>	
<b>Process fitting/Material</b>			Flange 2" 150 lb RF, ASME B16.5/316L	<b>30</b>	
Thread G 1 1/2" (DIN 3852-A) PN 400/316L <sup>28)</sup>	<b>00</b>		Flange 2" 300 lb RF, ASME B16.5/316L	<b>31</b>	
Thread 1 1/2" NPT (ASME B1.20.1) PN 400/316L <sup>28)</sup>	<b>01</b>		Flange 2" 600 lb RF, ASME B16.5/316L	<b>32</b>	
Thread G1 1/2" PN 400, DIN 3852-A/Alloy C22 (2.4602)	<b>02</b>		Flange 2" 1 500 lb RF, ASME B16.5/316L	<b>33</b>	
Thread 1 1/2" NPT PN 400, ASME B1.20.1/Alloy C22 (2.4602)	<b>03</b>		Flange 3" 150 lb RF, ASME B16.5/316L	<b>34</b>	
Flange DN 50 PN 40 Form C, DIN 2501/316L with Alloy C22 (2.4602) coating	<b>04</b>		Flange 3" 300 lb RF, ASME B16.5/316L	<b>35</b>	
Flange DN 80 PN 40 Form C, DIN 2501/316L with Alloy C22 (2.4602) coating	<b>05</b>		Flange 3" 600 lb RF, ASME B16.5/316L	<b>36</b>	
Flange DN 100 PN 16 Form C, DIN 2501/316L with Alloy C22 (2.4602) coating	<b>06</b>		Flange 3" 900 lb RF, ASME B16.5/316L	<b>37</b>	
Flange DN 50 PN 40 Form B1, EN 1092-1/316L with Alloy C22 (2.4602) coating	<b>07</b>		Flange 3" 2 500 lb RF, ASME B16.5/316L	<b>38</b>	
Flange DN 50 PN 63 Form B1, EN 1092-1/316L with Alloy C22	<b>08</b>		Flange 3 1/2" 600 lb RF, ASME B16.5/316L	<b>40</b>	
Flange DN 50 PN 40 Form C, DIN 2501/316L	<b>10</b>		Flange 4" 150 lb RF, ASME B16.5/316L	<b>41</b>	
Flange DN 50 PN 40 form V13, DIN 2513/316L	<b>11</b>		Flange 4" 300 lb RF, ASME B16.5/316L	<b>42</b>	
Flange DN 65 PN 64 Form V13, DIN 2501/316L	<b>12</b>		Flange 4" 600 lb RF, ASME B16.5/316L	<b>43</b>	
Flange DN 80 PN 40 Form C, DIN 2501/316L	<b>13</b>		Flange 6" 150 lb RF, ASME B16.5/316L	<b>44</b>	
Flange DN 80 PN 40 Form V13, DIN 2501/316L	<b>14</b>		Flange 6" 300 lb RF, ASME B16.5/316L	<b>45</b>	
Flange DN 80 PN 100 Form L, DIN 2501/316L <sup>28)</sup>	<b>15</b>		Flange 6" 600 lb RF, ASME B16.5/316L	<b>46</b>	
Flange DN 100 PN 16 Form C, DIN 2501/316L	<b>16</b>		Flange 2" 150 lb Fisher special return/316L	<b>47</b>	
Flange DN 100 PN 16 Form V13, DIN 2501/316L	<b>17</b>		Flange 3" 900 lb RJF, ASME B16.5/Alloy C22 (2.4602)	<b>48</b>	
Flange DN 100 PN 40 Form C, DIN 2501/316L	<b>18</b>		Flange 2" 900 lb RF, ASME B16.5/316L	<b>50</b>	
Flange DN 100 PN 40 Form V13, DIN 2513/316L	<b>20</b>		Flange 3" 1 500 lb RF, ASME B16.5/316L	<b>51</b>	
Flange DN 150 PN 16 Form C, DIN 2501/316L	<b>21</b>		Flange 4" 900 lb RF, ASME B16.5/316L	<b>52</b>	
Flange DN 50 PN 40 EN 1092-1 Form B1/316L	<b>22</b>		Flange 4" 1 500 lb RF, ASME B16.5/316L	<b>53</b>	
Flange DN 100 PN 160 GOST 12815-80.7/316L <sup>28)</sup>	<b>23</b>		Flange 4" 2 500 lb RJF, ASME B16.5/316L <sup>28)</sup>	<b>54</b>	
Flange 2" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>24</b>		Flange 4" 1500 lb RJF, ASME B16.5/316L <sup>28)</sup>	<b>55</b>	
Flange 2" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>25</b>		Flange 3" 600 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>56</b>	
Flange 2" 600 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>26</b>		Flange 4" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>57</b>	
Flange 3" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>27</b>		Flange 4" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>58</b>	
Flange 3" 300 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>28</b>		Flange 6" 150 lb RF, ASME B16.5/316L with Alloy C22 (2.4602) coating	<b>70</b>	
Flange DN 80 PN 160 Form C, DIN 2501/316L <sup>28)</sup>	<b>60</b>		Flange DN 50 PN 40 Form C, DIN 2501/Alloy C22 (2.4602) solid	<b>71</b>	
Flange DN 80 PN 250 Form L, DIN 2501/316L <sup>28)</sup>	<b>61</b>		Flange DN 100 PN 16 Form C, DIN 2501/C22 solid	<b>72</b>	
Flange DN 50 PN 160, EN 1092-1 Form B1/316L <sup>28)</sup>	<b>62</b>		Flange DN 100 PN 40 Form N, DIN 2501/Alloy C22 (2.4602) solid	<b>73</b>	
Flange DN 50 PN 160, EN 1092-1 Form B2/316L <sup>28)</sup>	<b>63</b>		Flange DN 50 PN 40 Form B1, EN 1092-1/Alloy C22 (2.4602) solid	<b>74</b>	
Flange DN 50 PN 32, EN 1092-1 Form B1/316L <sup>28)</sup>	<b>64</b>		Flange 2" 150 lb RF, ASME B16.5/Alloy C22 (2.4602) solid	<b>75</b>	
Flange DN 65 PN 250, EN 1092-1 Form B1/316L <sup>28)</sup>	<b>65</b>		Flange 2" 300 lb RF, ASME B16.5/Alloy C22 (2.4602) solid	<b>76</b>	
Flange DN 100 PN 160, EN 1092-1 Form B2/316L <sup>28)</sup>	<b>66</b>		Flange 2" 600 lb RF, ASME B16.5/Alloy C22 (2.4602) solid	<b>77</b>	
			Flange 2" 900 lb RJF, ASME B16.5/Alloy C22 (2.4602) solid	<b>78</b>	
			Flange 2" 1 500 lb RJF, ASME B16.5/Alloy C22 (2.4602) solid	<b>80</b>	
			Flange 3" 150 lb RF, ASME B16.5/Alloy C22 (2.4602) solid	<b>81</b>	
			Flange 3" 300 lb RF, ASME B16.5/Alloy C22 (2.4602) solid	<b>82</b>	
			Flange 3" 600 lb RF, ASME B16.5/Alloy C22 (2.4602) solid	<b>83</b>	

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG270</b>	<b>7ML5883-</b>		<b>SITRANS LG270</b>	<b>7ML5883-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications			A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications		
Flange 4" 150 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	8 4		Aluminum/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper		D
Flange 4" 300 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	8 5		Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper		E
Flange 3" 600 lb RJF for R31, ASME B16.5/ Alloy C22 (2.4602) solid	8 6		Aluminum double chamber/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper		F
Flange 2" 2 500 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 A	Stainless steel (precision casting) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/blind stopper		L
Flange 3" 1 500 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 B	Stainless steel (precision casting) 316L/IP66/ IP68 (0.2 bar) 1/2" NPT/blind stopper		M
Flange 3" 2 500 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 C	Stainless steel (electropolished) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/blind stopper		N
Flange 4" 600 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 D	Stainless steel (electropolished) 316L/IP66/ IP68 (0.2 bar) 1/2" NPT/blind stopper		P
Flange 4" 600 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 E	Stainless steel double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/blind stopper		Q
Flange 4" 900 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 F	Stainless steel double chamber/IP66/IP68 (0.2 bar) 1/2" NPT/blind stopper		R
Flange 4" 900 lb RJF, ASME B16.5/ Alloy C22 (2.4602) massiv	9 0	L 1 G	Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/ cable gland stainless steel		S
Flange 4" 1 500 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 H	Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel		T
Flange 4" 2 500 lb RJF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 J	Stainless steel (precision casting) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/cable gland stainless steel		U
Flange 8" 300 lb RF, ASME B16.5/ Alloy C22 (2.4602) solid	9 0	L 1 K	Stainless steel (electropolished) 316L/IP66/ IP68 (0.2 bar) M20 x 1.5/cable gland stain- less steel		V
Flange 3 1/2" 600 lb Fisher type 249B and 259B/ Alloy C22 (2.4602) solid	9 0	L 1 L	Aluminum single chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		W
Flange 2 1/2" 300 lb RF, ASME B16.5/316/316L	9 0	L 2 A	Aluminum double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		X
Flange 2 1/2" 600 lb RF, ASME B16.5/316/316L	9 0	L 2 B	Stainless steel single chamber (precision casting)/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		Y
Flange DN 50 PN 40 Form D, EN 1092-1/316/ 316L <sup>32)</sup>	9 0	L 2 C	Stainless steel double chamber/IP66/IP68 (0.2 bar) M20 x 1.5/cable gland brass nickel-plated		J
Flange 2 1/2" 1 500 lb RF, ASME B16.5/316/316L	9 0	L 2 D	Remote stainless steel single chamber hous- ing, electropolished/IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>8)</sup>		Z Q 2 A
Thread G 1" (DIN 3852-A) PN 100/316L	9 0	L 3 C	Remote plastic single chamber housing / IP66/IP67 with cable outlet IP68 (electronics separated by cable); M20 x 1.5/blind plug <sup>8)</sup>		Z Q 2 B
Thread 1" NPT, ASME B1.20.1/PN 100/316L	9 0	L 3 D			
Thread G 1 1/2" (DIN 3852-A) PN 100/316L	9 0	L 3 E			
Thread 1 1/2" NPT, ASME B1.20.1/PN100/316L	9 0	L 3 F			
Thread 2" NPT, ASME B1.20.1/PN 100/316L	9 0	L 3 G			
<b>Electronics</b>			<b>Lengths</b>		
Two-wire 4 ... 20 mA/HART	0		<u>Rod ø 16 mm/316L</u>		
Four-wire Modbus <sup>5)8)11)</sup>	1		300 mm (11.81 inch) <sup>33)</sup>		0
Two-wire 4 ... 20 mA/HART with SIL qualification <sup>5)</sup>	2		500 mm (19.69 inch) <sup>33)</sup>		1
Four-wire 4 ... 20 mA/HART; 90 ... 253 V AC; 50/60 Hz <sup>5)8)11)</sup>	3		501 ... 1 000 mm (19.72 ... 39.37 inch) <sup>33)</sup>		2
Four-wire 4 ... 20 mA/HART; 9.6 ... 48 V DC; 20 ... 42 V AC <sup>5)8)11)</sup>	4		1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>33)</sup>		3
PROFIBUS PA <sup>5)</sup>	5		2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>33)</sup>		4
FOUNDATION Fieldbus <sup>5)</sup>	6		3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>33)</sup>		5
			4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>33)</sup>		6
			5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>33)</sup>		7
<b>Seal/Second line of defense/ Process temperature</b>					
Ceramic-graphite/with glass seal/ -196 ... +280 °C (-321 ... +536 °F)	A				
Ceramic-graphite/with glass seal/ -196 ... +450 °C (-321 ... +842 °F)	B				
Ceramic-graphite/with glass seal/ -196 ... +400 °C (-321 ... +752 °F) <sup>29)</sup>	C				
PEEK-FFKM (Kalrez 6375) /with glass seal/ -20...+250 °C (-4 ... +482 °F) <sup>29)</sup>	D				
<b>Housing/Protection/Cable</b>					
<b>Note: for installation of remote display, 7ML5840, with LG two chamber housing options, contact PVC</b>					
Plastic IP66/IP67 M20 x 1.5/blind stopper		A			
Plastic IP66/IP67 1/2" NPT/blind stopper		B			
Aluminum/IP66/IP68 (0.2 bar) M20 x 1.5/ blind stopper		C			

Selection and Ordering data	Article No.	Ord. Code	Selection and Ordering data	Article No.	Ord. Code
<b>SITRANS LG270</b>	<b>7ML5883-</b>		<b>SITRANS LG270</b>	<b>7ML5883-</b>	
A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications			A guided wave radar sensor for continuous level and interface measurement of liquids in aggressive applications		
<u>Rod ø 16 mm/C22</u>			<u>Coax ø 42.2 mm/316L</u>		
501 ... 1 000 mm (19.72 ... 39.37 inch) <sup>33)</sup>	9	R 1 A	45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)	9	R 4 L
1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>33)</sup>	9	R 1 B	50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)	9	R 4 M
2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>33)</sup>	9	R 1 C	55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)	9	R 4 N
3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>33)</sup>	9	R 1 D			
4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>33)</sup>	9	R 1 E	<u>Coax ø 42.2 mm/C22</u>		
5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>33)</sup>	9	R 1 F	300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>33)</sup>	9	R 3 G
<u>Rod ø 8 mm/316L</u>			1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>33)34)</sup>	9	R 3 H
300 ... 1 000 mm (11.81 ... 39.37 inch)	9	R 1 H	2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>33)</sup>	9	R 3 J
1 001 ... 2 000 mm (39.41 ... 78.74 inch)	9	R 1 J	3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>33)</sup>	9	R 3 K
2 001 ... 3 000 mm (78.78 ... 118.11 inch)	9	R 1 K	4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>33)</sup>	9	R 3 L
3 001 ... 4 000 mm (118.15 ... 157.48 inch)	9	R 1 L	5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>33)</sup>	9	R 3 M
4 001 ... 5 000 mm (157.52 ... 196.85 inch)	9	R 1 M			
5 001 ... 6 000 mm (196.89 ... 236.22 inch)	9	R 1 N	<u>Coax ø 21.3 mm/316L</u>		
<u>Cable lengths ø 2 or 4 mm/316L</u>			300 ... 1 000 mm (11.81 ... 39.37 inch) <sup>33)</sup>	9	R 3 Q
501 ... 1 000 mm (19.72 ... 39.37 inch)	9	R 2 E	1 001 ... 2 000 mm (39.41 ... 78.74 inch) <sup>33)34)</sup>	9	R 3 R
1 000 ... 5 000 mm (39.37 ... 196.85 inch)	9	R 2 F	2 001 ... 3 000 mm (78.78 ... 118.11 inch) <sup>33)</sup>	9	R 3 S
5 001 ... 10 000 mm (196.89 ... 393.70 inch)	9	R 2 G	3 001 ... 4 000 mm (118.15 ... 157.48 inch) <sup>33)</sup>	9	R 3 T
10 001 ... 15 000 mm (393.74 ... 590.55 inch)	9	R 2 H	4 001 ... 5 000 mm (157.52 ... 196.85 inch) <sup>33)</sup>	9	R 3 U
15 001 ... 20 000 mm (590.59 ... 787.40 inch)	9	R 2 J	5 001 ... 6 000 mm (196.89 ... 236.22 inch) <sup>33)</sup>	9	R 3 V
20 001 ... 25 000 mm (787.44 ... 984.25 inch)	9	R 2 K			
25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)	9	R 2 L	<u>Coax ø 21.3 mm/C22</u>		
30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)	9	R 2 M	300 ... 1 000 mm (11.81 ... 39.37 inch)	9	R 5 A
35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)	9	R 2 N	1 001 ... 2 000 mm (39.41 ... 78.74 inch)	9	R 5 B
40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)	9	R 2 P	2 001 ... 3 000 mm (78.78 ... 118.11 inch)	9	R 5 C
45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)	9	R 2 Q	3 001 ... 4 000 mm (118.15 ... 157.48 inch)	9	R 5 D
50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)	9	R 2 R	4 001 ... 5 000 mm (157.52 ... 196.85 inch)	9	R 5 E
55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)	9	R 2 S	5 001 ... 6 000 mm (196.89 ... 236.22 inch)	9	R 5 F
<u>Cable lengths ø 4 mm/ C22</u>					
501 ... 1 000 m (19.72 ... 39.37 inch)	9	R 4 A			
1 000 ... 5 000 mm (39.37 ... 196.85 inch)	9	R 4 B			
5 001 ... 10 000 mm (196.89 ... 393.70 inch)	9	R 4 C			
10 001 ... 15 000 mm (393.74 ... 590.55 inch)	9	R 4 D			
15 001 ... 20 000 mm (590.59 ... 787.40 inch)	9	R 4 E			
20 001 ... 25 000 mm (787.44 ... 984.25 inch)	9	R 4 F			
25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)	9	R 4 G			
30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)	9	R 4 H			
35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)	9	R 4 J			
40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)	9	R 4 K			

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Order code	Selection and Ordering data	Order code
<b>Further designs (mandatory)</b>		<b>Further designs (optional)</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).		Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
<b>Supplementary electronics</b>		Enter the total insertion length in plain text description	<b>Y01</b>
Without	<b>A00</b>	Y02 rigid part is 100 mm, only applicable for cable versions	<b>Y02</b>
Additional current output 4 ... 20 mA <sup>B)</sup>	<b>A01</b>	Reference probe G length of reference distance = 260 mm/10.24 inches (note blanking 450 mm required with min. probe 1 000 mm)	<b>Y05</b>
<b>Dimensions centering weight (diameter/height)</b>		Reference probe G length of reference distance = 500 mm/19.69 inches (note blanking 690 mm required with min. probe 1 250 mm)	<b>Y06</b>
Without	<b>B00</b>	Reference probe G length of reference distance = 750 mm/29.53 inches (note blanking 940 mm required with min. probe 1 500 mm)	<b>Y07</b>
ø 40/30 mm	<b>B01</b>	Remote electronic cable lengths: 2 m (6.6 ft). Only available with Housing options Q2A and Q2B	<b>Y10</b>
ø 45/30 mm (for 2 inch tubes)	<b>B02</b>	Remote electronic cable lengths: 5 m (16.4 ft). Only available with Housing options Q2A and Q2B	<b>Y11</b>
ø 75/30 mm (for 3 inch tubes)	<b>B03</b>	Remote electronic cable lengths: 10 m (32.8 ft). Only available with Housing options Q2A and Q2B	<b>Y12</b>
ø 95/30 mm (for 4 inch tubes)	<b>B04</b>	Customer specific adjustment (unit value, 100 % distance from seal, 0 % distance from seal)	<b>Y20</b>
ø 40 mm/30 mm	<b>B05</b>	Cleaning included certificate: oil, grease and silicone free	<b>W01</b>
ø 1.57 inch/1.18 inch (for 2 inch Schedule 160)	<b>B06</b>	Identification Label (measurement loop) stainless steel, 40 characters max, add in plain text. To add more than one line use a coma "," for line break.	<b>Y17</b>
ø 45 mm/30 mm (for 2 inch tubes)	<b>B07</b>	Identification Label (measurement loop) foil, 40 characters max, add in plain text. To add more than one line use a coma "," for line break.	<b>Y18</b>
ø 1.77 inch/1.18 inch (for 2 inch Schedule 40/80)	<b>B08</b>	3.1-Inspection Certificate for instrument (EN 10204) <sup>35)</sup>	<b>C12</b>
ø 75 mm/30 mm (for 3 inch tubes)		NACE0175 to 3.1 Material Certificate for material (EN10204 NACE MR 0175) (NACE not in scope for Hygienic process connections) <sup>35)</sup>	<b>D07</b>
ø 2.95 inch/1.18 inch (for 3 inch Schedule 10/40)		3.1-Inspection Certificate for instrument with test data (EN 10204) <sup>35)</sup>	<b>C25</b>
ø 95 mm/30 mm (for 4 inch tubes)		2.2-Factory certificate for material (EN 10204) <sup>35)</sup>	<b>C15</b>
ø 3.74 inch/1.18 inch (for 4 inch Schedule 80)		Quality and test plan <sup>35)</sup>	<b>C26</b>
<b>Rod mounted</b>		Dye penetration test, results confirmed via a 3.1 certificate/instrument (EN10204) <sup>35)</sup>	<b>C13</b>
Without Rod, applicable for coax or cable probe types only	<b>C00</b>	X-ray test + 3.1 certificate/instrument <sup>35)</sup>	<b>C14</b>
Mounted	<b>C01</b>	Positive material identification test + 3.1 certificate/ instrument <sup>35)</sup>	<b>C16</b>
Not mounted	<b>C02</b>	Roughness test + 3.1 certificate/instrument <sup>35)</sup>	<b>C18</b>
<b>Indicating/adjustment module</b>		Pressure test + 3.1 certificate/instrument <sup>35)</sup>	<b>C31</b>
Without	<b>E00</b>	Helium leak test + 3.1 certificate/instrument <sup>35)</sup>	<b>C32</b>
Mounted	<b>E01</b>	Pressure test according to Norsok + 3.1 certificate/ instrument <sup>35)</sup>	<b>C61</b>
Laterally mounted	<b>E02</b>	5 point calibration certificate (min. length 1 000 mm) <sup>35)</sup>	<b>C62</b>
<b>Language of display</b>		Pressure test (acc. to ASME B31.1), incl. 3.1 Inspection certificate <sup>36)</sup>	<b>C63</b>
German	<b>L00</b>	Certificate: Approval for steam boiler according to EN 12952-11, EN 12953-9 <sup>37)</sup>	<b>C70</b>
English	<b>L01</b>		
French	<b>L02</b>		
Dutch	<b>L03</b>		
Italian	<b>L04</b>		
Spanish	<b>L05</b>		
Portuguese	<b>L06</b>		
Russian	<b>L07</b>		
Chinese	<b>L08</b>		
Japanese	<b>L09</b>		
<b>Operating instructions</b>			
German	<b>M00</b>		
English	<b>M01</b>		
French	<b>M02</b>		
Spanish	<b>M03</b>		

Selection and Ordering data	Article No.
<b>Operating Instructions</b>	
All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Accessories</b>	
SITRANS LG, GWR sensor Display Module	<b>A5E34143449</b>
SITRANS LG, two-wire 4 ... 20 mA/HART electronic	<b>A5E35637821</b>
SITRANS LG, USB communicator	<b>A5E35192015</b>
SITRANS LG, Mounting eye M12 x 20	<b>PBD:51041448</b>
SITRANS LG, Mounting spring	<b>PBD:51041449</b>
Siemens Intrinsically Safe Barrier (DC powered), ATEX II 1 G EEx ia	<b>7NG4124-0AA00</b>
SITRANS RD100, loop powered display - see Chapter 7	<b>7ML5741-...</b>
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	<b>7ML5740-...</b>
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	<b>7ML5744-...</b>
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	<b>7ML5750-...</b>
For applicable back up point level switch - see point level measurement section	

Note: some configuration options are not available.  
For restriction information see the online PIA configuration tool.

- 1) Not available with Version/Material options E, F, G, J, and K.
- 2) Available only with Electronic options 0 and 2.
- 3) Not available with Seal/Process temperature option D.
- 4) Not available with Stainless Steel (electropolished) Housing/Protection/Cable options and certain glands.
- 5) Available only with Supplementary electronic option A00.
- 6) Available only with Electronic options 0, 2, and 5.
- 7) Available only with Electronic options 0, 2, 5, and 6.
- 8) Not available with Indicating/adjusting module E02.
- 9) Not available with Plastic and Stainless Steel (electropolished) Housing/Protection/Cable options and certain glands.
- 10) Available only with Electronic options 0 ... 4.
- 11) Available only with Double chamber, Metallic Housing/Protection/Cable options and certain glands.
- 12) Available only with Electronic options 0, 1, and 2.
- 13) Available only with Electronic options 0, 2, 3, and 4.
- 14) Available only with Version/Material options A, B, C, D, and H.
- 15) Not available with Remote and Stainless Steel (electropolished) Housing/Protection/Cable options and certain glands.
- 16) Available only with Single chamber, Aluminum and Stainless steel (precision casting) Housing/Protection/Cable options.
- 17) Not available with Modbus and FOUNDATION Fieldbus Electronic options.
- 18) Available only with Electronic options 0, 2, and 6.
- 19) Not available with Modbus Electronic options.
- 20) Available only with Housing/Protection/Cable options N, P, V, and Q2A.
- 21) Not available with Housing/Protection/Cable options W, X, Y, and J.
- 22) Available only with Housing/Protection/Cable options C, E, L, Q.
- 23) Not available with Seal/Process temperature option C.
- 24) Available only with Dimensions centering weight option B00.
- 25) Available only with Rod mounted option C00.
- 26) Not available with Dimensions centering weight option B00.
- 27) Not available with Rod mounted option C00.
- 28) Not available with Seal/Process temperature options C and D.
- 29) Not available with Remote Housing/Protection/Cable options.
- 30) Not available with Seal/Process temperature options B and D.
- 31) Available only with Seal/Process temperature option D.
- 32) Available only with Seal/Process temperature options A, B, and C.
- 33) Not available with Order code Y02.

34) Accuracy is application dependent, please consult factory.

35) Listed Certificates are not available with all configurations, please contact factory for more information.

36) Available only with ASME Process fitting/Material options.

37) Available with Version/Material options G, L, M and Electronic options 2 and 6.

Note: Please consult manual for further details.



## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.
<b>SITRANS LG Remote Interface</b>	<b>7ML5840-</b>
	0
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
<b>Note: for installation of remote display, 7ML5840, with LG two chamber housing options, contact PVC</b>	
<b>Approval</b>	
For Ex-free area	0 A
ATEX II 1G, 2G, Ex ia IIC T6 Ga, Gb	0 C
ATEX II 2G, Ex d IIC T6 Gb <sup>1)</sup>	0 E
IEC Ex ia IIC T6 Ga, Gb	0 F
IEC Ex d IIC T6 Gb <sup>1)</sup>	0 G
CSA (NI) Class I, Div. 2, Groups A, B, C, D; (DIP) Class II, III, Div. 1, Groups E, F, G	0 H
CSA (IS) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G	0 J
CSA (XP) Class I, Div. 1, Groups A, B, C, D <sup>1)</sup>	0 K
INMETRO Ex ia IIC T6 Ga, Gb	0 L
INMETRO Ex d IIC T6 Gb <sup>1)</sup>	0 M
Shipping Approval (DNV/GL) <sup>6)</sup>	0 N
<b>Electronics</b>	
Digital (I <sup>2</sup> C communication)	A
<b>Housing</b>	
Plastic <sup>2)4)</sup>	0
Aluminum <sup>3)5)</sup>	1
Stainless Steel (precision casting) <sup>3)5)</sup>	2
<b>Housing protection</b>	
IP66/IP67 NEMA 4X	0
IP66/IP68 NEMA 6P (0.2 bar)	1
<b>Cable entry</b>	
M20 x 1.5/ Blind plug	3
½" NPT/ Blind plug	5
<b>Display</b>	
Without	A
Mounted	B
<b>Mounting</b>	
For wall mounting with Aluminum or stainless steel housing	A
For carrier rail and wall mounting with plastic housing	B
For carrier rail with Aluminum or stainless steel housing	C
For tube mounting (29 ... 60 mm) including mounting material	D
<b>Certificates</b>	
None	0
3.1 Certificate/Instrument with test data	1
Quality and Test plan	2

1) Available only with Housing options 1 and 2.

2) Available only with Housing option 0.



3) Available only with Housing option 1.

4) Available only with Mounting options B and D.

5) Not available with Mounting option B.

6) Shipping approval is only available with housing options 0 and 1.

Selection and Ordering data	Article No.
<b>SITRANS LG Replacement Probes</b>	<b>7ML5841-</b>
	0
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
<b>Instrument</b>	
LG240 <sup>4)5)</sup>	0
LG250 <sup>6)</sup>	1
LG260 <sup>7)</sup>	2
LG270 <sup>9)10)</sup>	3
<b>Probe Type</b>	
Exchangeable cable ø 2 mm with gravity weight/316 <sup>1)11)</sup>	AA
Exchangeable cable ø 2 mm center weight/316 <sup>2)11)</sup>	AC
Exchangeable cable ø 4 mm without weight/316 <sup>1)11)</sup>	AD
Exchangeable cable ø 4 mm with gravity weight/316 <sup>1)11)</sup>	AE
Exchangeable cable ø 4 mm with center weight/316 <sup>2)11)</sup>	AG
Exchangeable cable ø 6 mm with gravity weight/316 <sup>1)8)11)</sup>	AH
Exchangeable rod ø 8 mm/316L <sup>1)</sup>	AP
Exchangeable rod ø 8 mm/1.4435 (acc. to Basle Standard) <sup>1)</sup>	AQ
Exchangeable rod ø 12 mm/316L <sup>1)</sup>	AU
Exchangeable rod ø 16 mm/316L <sup>1)</sup>	AW
<b>Process fitting</b>	
Thread to 1 1/2 inch	0
Thread from 2 inch	1
Flange less than DN 50 or 2 inch	2
Flange greater or equal to DN 50 or 2 inch or hygienic fitting (not for safety ingold 25 x 46 mm)	3
<b>Dimension centering weight</b>	
Without	0
ø 40 mm/30 mm	1
ø 45 mm/30 mm (for 2 inch tubes)	2
ø 75 mm/30 mm (for 3 inch tubes)	3
ø 95 mm/30 mm (for 4 inch tubes)	4
ø 1.57 inch/1.18 inch (for 2 inch Schedule 160)	5
ø 1.77 inch/1.18 inch (for 2 inch Schedule 40/80)	6
ø 2.95 inch/1.18 inch (for 3 inch Schedule 10/40)	7
ø 3.74 inch/1.18 inch (for 4 inch Schedule 80)	8
<b>Certificates</b>	
Without	0
2.2 Material certificate	1
3.1 Material certificate	2

Selection and Ordering data	Article No.	Selection and Ordering data	Article No.
<b>SITRANS LG Replacement Probes</b>	<b>7ML5841-</b>	<b>SITRANS LG Replacement Probes</b>	<b>7ML5841-</b>
	 0		 0
<b>Lengths</b>		<b>Cable Lengths <math>\varnothing</math> 6 mm/316</b>	
<u>Rod <math>\varnothing</math> 8 mm</u>		501 ... 1 000 mm (19.72 ... 39.37 inch)	<b>BM</b>
300 ... 1 000 mm (11.81 ... 39.37 inch)	<b>AA</b>	1 001 ... 5 000 mm (39.41 ... 196.85 inch)	<b>BN</b>
1 001 ... 2 000 mm (39.41 ... 78.74 inch)	<b>AB</b>	5 000 ... 10 000 mm (196.89 ... 393.70 inch)	<b>BP</b>
2 001 ... 3 000 mm (78.78 ... 118.11 inch)	<b>AC</b>	10 001 ... 15 000 mm (393.74 ... 590.55 inch)	<b>BQ</b>
3 001 ... 4 000 mm (118.15 ... 157.48 inch)	<b>AD</b>	15 001 ... 20 000 mm (590.59 ... 787.40 inch)	<b>BR</b>
4 001 ... 5 000 mm (157.52 ... 196.85 inch)	<b>AE</b>	20 001 ... 25 000 mm (787.44 ... 984.25 inch)	<b>BS</b>
5 001 ... 6 000 mm (196.89 ... 236.22 inch)	<b>AF</b>	25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)	<b>BT</b>
<u>Rod <math>\varnothing</math> 12 mm</u>		30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)	<b>BU</b>
300 ... 1 000 mm (11.81 ... 39.37 inch)	<b>AG</b>	35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)	<b>BV</b>
1 001 ... 2 000 mm (39.41 ... 78.74 inch)	<b>AH</b>	40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)	<b>BW</b>
2 001 ... 3 000 mm (78.78 ... 118.11 inch)	<b>AJ</b>	45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)	<b>BX</b>
3 001 ... 4 000 mm (118.15 ... 157.48 inch)	<b>AK</b>	50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)	<b>BY</b>
4 001 ... 5 000 mm (157.52 ... 196.85 inch)	<b>AL</b>	55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)	<b>CA</b>
5 001 ... 6 000 mm (196.89 ... 236.22 inch)	<b>AM</b>	60 001 ... 65 000 mm (2 362.24 ... 2 559.06 inch)	<b>CB</b>
<u>Rod <math>\varnothing</math> 16 mm</u>		65 001 ... 70 000 mm (2 559.09 ... 2 755.91 inch)	<b>CC</b>
300 ... 1 000 mm (11.81 ... 39.37 inch)	<b>AN</b>	70 001 ... 75 000 mm (2 755.94 ... 2 952.76 inch)	<b>CD</b>
1 001 ... 2 000 mm (39.41 ... 78.74 inch)	<b>AP</b>		
2 001 ... 3 000 mm (78.78 ... 118.11 inch)	<b>AQ</b>		
3 001 ... 4 000 mm (118.15 ... 157.48 inch)	<b>AR</b>		
4 001 ... 5 000 mm (157.52 ... 196.85 inch)	<b>AS</b>		
5 001 ... 6 000 mm (196.89 ... 236.22 inch)	<b>AT</b>		
<u>Cable Lengths <math>\varnothing</math> 2 mm and 4 mm/316</u>			
501 ... 1 000 mm (19.72 ... 39.37 inch)	<b>AU</b>		
1 001 ... 5 000 mm (39.41 ... 196.85 inch)	<b>AV</b>		
5 000 ... 10 000 mm (196.85 ... 393.70 inch)	<b>AW</b>		
10 001 ... 15 000 mm (393.74 ... 590.55 inch)	<b>AX</b>		
15 001 ... 20 000 mm (590.59 ... 787.40 inch)	<b>AY</b>		
20 001 ... 25 000 mm (787.44 ... 984.25 inch)	<b>BA</b>		
25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)	<b>BB</b>		
30 001 ... 35 000 mm (1 181.14 ... 1 377.95 inch)	<b>BC</b>		
35 001 ... 40 000 mm (1 377.99 ... 1 574.80 inch)	<b>BD</b>		
40 001 ... 45 000 mm (1 574.84 ... 1 771.65 inch)	<b>BE</b>		
45 001 ... 50 000 mm (1 771.69 ... 1 968.50 inch)	<b>BF</b>		
50 001 ... 55 000 mm (1 968.54 ... 2 165.35 inch)	<b>BG</b>		
55 001 ... 60 000 mm (2 165.39 ... 2 362.20 inch)	<b>BH</b>		
60 001 ... 65 000 mm (2 362.24 ... 2 559.06 inch)	<b>BJ</b>		
65 001 ... 70 000 mm (2 559.09 ... 2 755.91 inch)	<b>BK</b>		
70 001 ... 75 000 mm (2 755.94 ... 2 952.76 inch)	<b>BL</b>		
		<b>Selection and Ordering data</b>	<b>Order code</b>
		<b>Further designs</b>	
		Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
		Enter the total insertion length in plain text description	<b>Y01</b>
		Total length: Enter the total length of rigid part (range 100 ... 1 000 mm LG270 limited to 100 mm) (cable versions only)	<b>Y02</b>
		1) Available only with Dimension centering weight option 0.	
		2) Available only with Dimension centering weight options 1 ... 8.	
		3) All Probe types are only available with corresponding Probe lengths.	
		4) Available only with Probe type option AQ.	
		5) Available only with Process fitting options 2 and 3.	
		6) Not available with Probe type options AQ and AW.	
		7) Available only with Probe type options AE, AH, and AW.	
		8) Not available with Process fitting option 2.	
		9) Available only with Probe type options AA, AC, AE, AG, and AW.	
		10) Available only with Process fitting options 0 and 3.	
		11) Not available with certificate options 1 and 2.	


## Level Measurement

Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

Selection and Ordering data	Article No.
<b>SITRANS LG Spacers</b>	<b>7ML5842-</b>
	<b>□□□□ - 0 0 A A 0</b>
<a href="#">↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</a>	
<b>Instrument</b>	
LG240 <sup>1)</sup>	<b>0</b>
LG250 <sup>2)</sup>	<b>1</b>
LG260 <sup>3)</sup>	<b>2</b>
LG270 <sup>3)</sup>	<b>3</b>
<b>Version/Material</b>	
Cable ø 4 mm/ PFA <sup>4)</sup>	<b>AA</b>
Rod ø 8 mm including fastening/ PEEK can be shortened <sup>5)</sup>	<b>AB</b>
Rod ø 10 mm/ PFA <sup>4)</sup>	<b>AC</b>
Rod ø 12 mm including fastening/ PEEK can be shortened <sup>5)</sup>	<b>AD</b>
Rod ø 16 mm, cable with gravity weight, including fastening/ PEEK can be shortened <sup>5)7)</sup>	<b>AE</b>
Cable ø 2 mm including fastening/ PEEK and 316L	<b>AF</b>
Rod ø 16 mm including fastening/ 1.4568 (AISI 631) flexible <sup>8)</sup>	<b>AG</b>
Rod ø 8 mm including fastening/ PTFE can be shortened <sup>5)</sup>	<b>AH</b>
Rod ø 12 mm including fastening/ 1.4568 (AISI 631) flexible <sup>6)</sup>	<b>AG</b>
<b>Tube diameter</b>	
50 mm (2 inch) up to 100 mm (4 inch)	<b>1</b>
49.2 mm (1.9 inch) up to 56.3 mm (2.2 inch)	<b>2</b>
66.6 mm (2.6 inch) up to 84.9 mm (3.3 inch)	<b>3</b>

- 1) Available only with Version/Material options AA and AC.
- 2) Available only with Version/Material options AB, AD, AE, AH and AJ.
- 3) Available only with Version/Material options AE and AG.
- 4) Available only with Tube Diameter option 1 and LG240.
- 5) Available only with Tube Diameter options 2 and 3 and LG250.
- 6) Available only with Tube Diameter option 1 and LG250.
- 7) Available only with Tube diameter option 1 and LG260 or LG270.
- 8) Available only with Tube Diameter options 2 and 3 and LG260 or LG270.

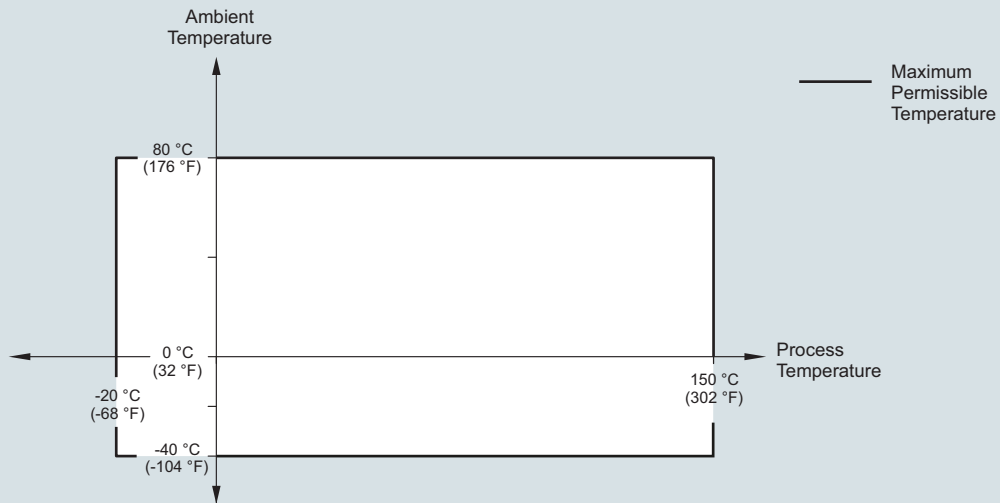**Characteristic curves****SITRANS LG240, Ambient temperature/process temperature, standard version**


SITRANS LG240, ambient temperature/process temperature curve

## Level Measurement


Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

#### SITRANS LG250, Ambient temperature/process temperature, standard version


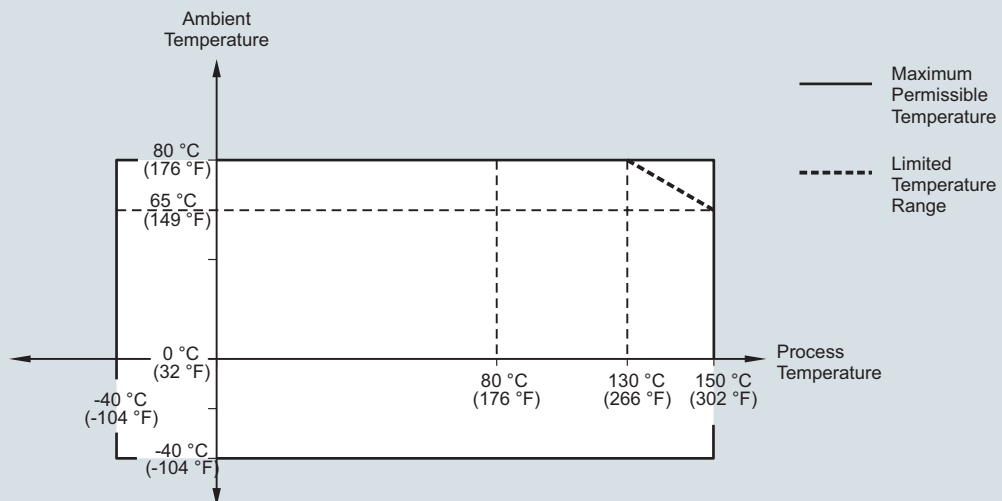


#### SITRANS LG250, Ambient temperature/process temperature, temperature adapter version

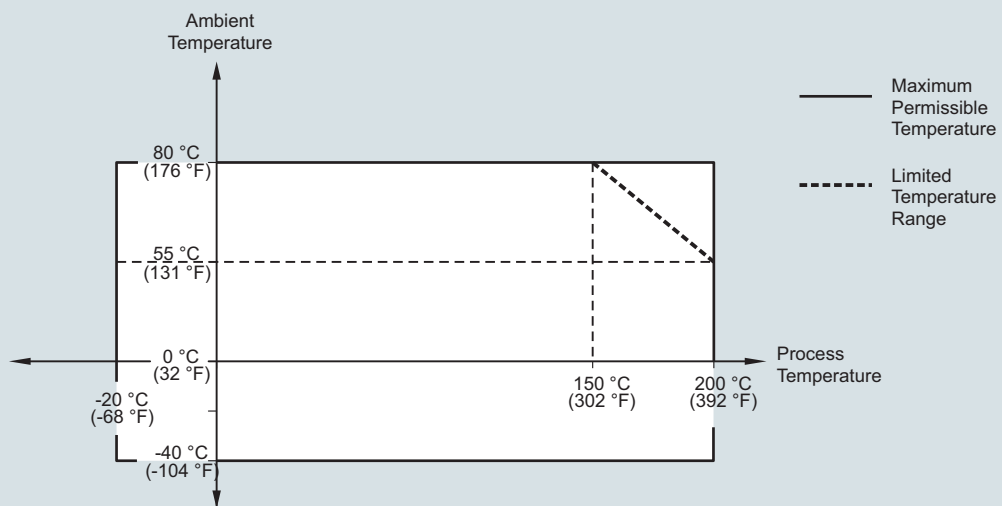

SITRANS LG250, ambient temperature/process temperature curve

### SITRANS LG260, Maximum tensile load with cereals and plastic granules - cable: $\varnothing$ 4 mm (0.157 inch)

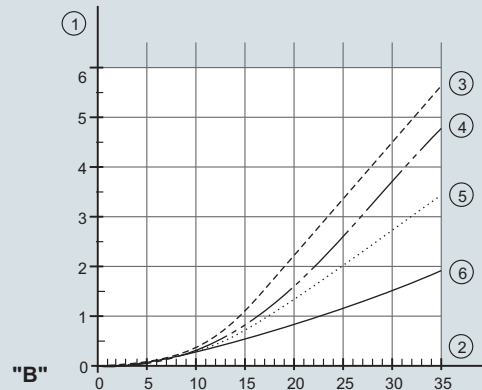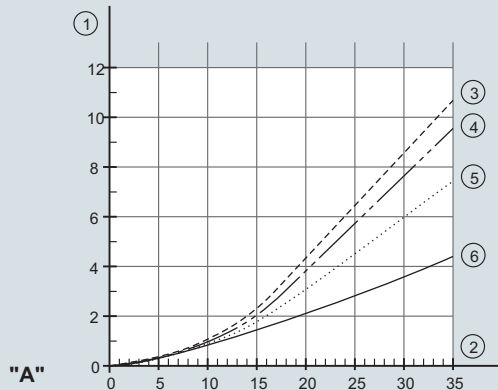

A. Cereals

B. Plastic granules

1. Tensile force in kN (the determined value must be multiplied with safety factor 2)

2. Cable length in m



3. Vessel diameter 12 m (39.37 ft)

4. Vessel diameter 9 m (29.53 ft)

5. Vessel diameter 6 m (19.69 ft)

6. Vessel diameter 3 m (9.843 ft)

### SITRANS LG260, Maximum tensile load with sand and cement - cable: $\varnothing$ 4 mm (0.157 inch)

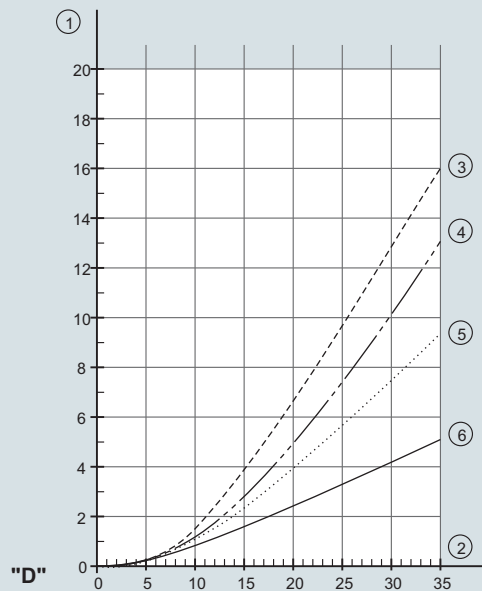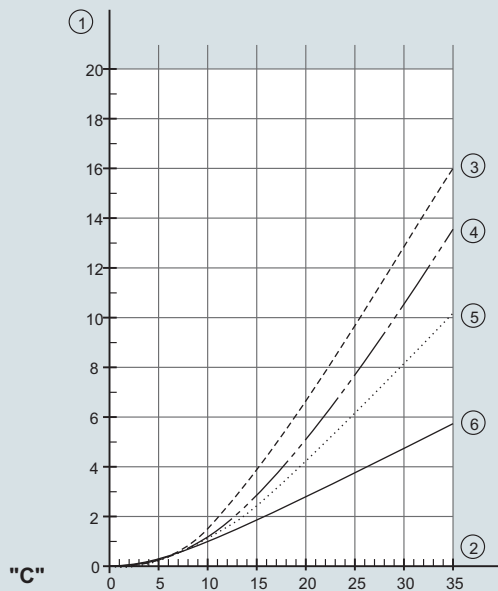

C. Sand

D. Cement

1. Tensile force in kN (the determined value must be multiplied with safety factor 2)

2. Cable length in m

3. Vessel diameter 12 m (39.37 ft)

4. Vessel diameter 9 m (29.53 ft)

5. Vessel diameter 6 m (19.69 ft)

6. Vessel diameter 3 m (9.843 ft)


SITRANS LG260, maximum tensile load curves

## Level Measurement


Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

**SITRANS LG260, Ambient temperature/process temperature, standard version**  
Cable version with  $\varnothing$  4 mm (0.157 inch)  
Cable version, PA coated with  $\varnothing$  6 mm (0.236 inch)

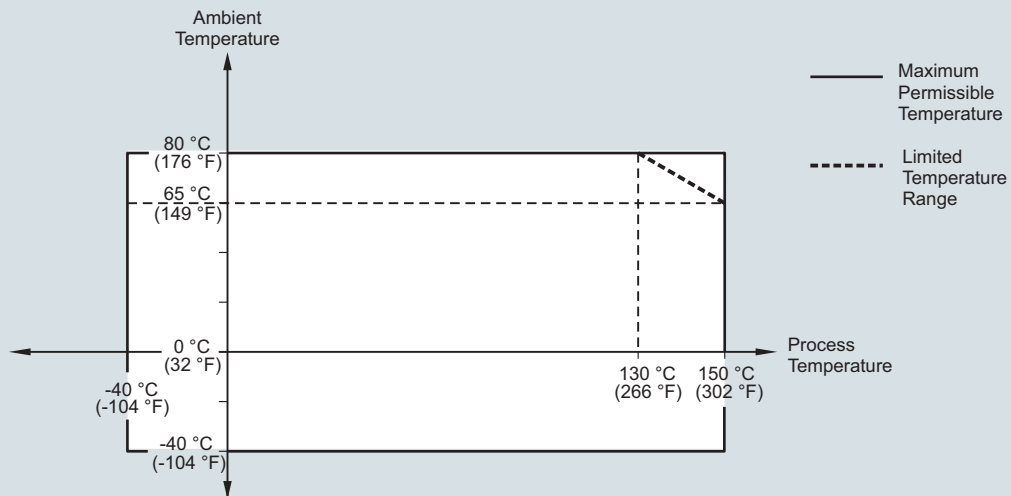


**SITRANS LG260, Ambient temperature/process temperature, temperature adapter version**  
Cable version with  $\varnothing$  4 mm (0.157 inch)  
Cable version, PA coated with  $\varnothing$  6 mm (0.236 inch)

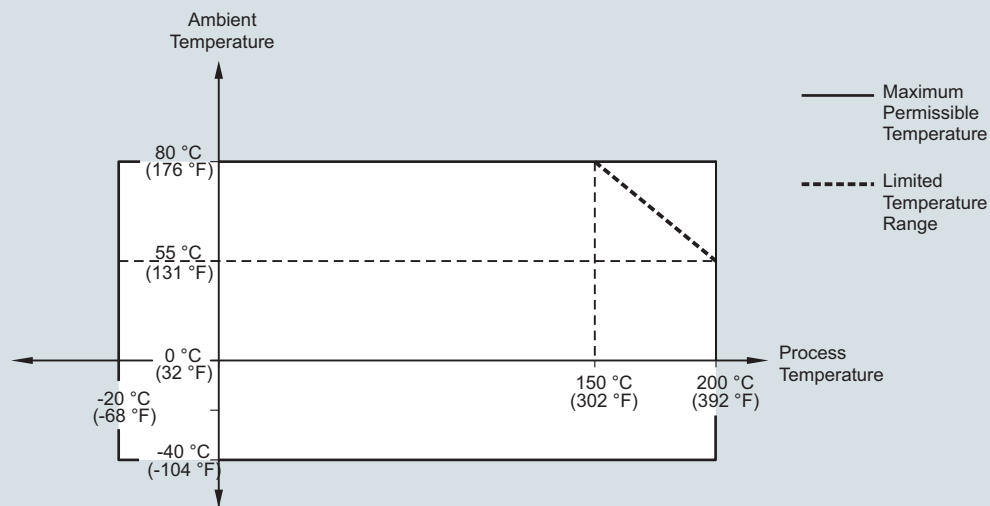


SITRANS LG260, ambient temperature/process temperature curves

**SITRANS LG260, Ambient temperature/process temperature, standard version**  
**Cable version with  $\varnothing$  6 mm (0.236 inch)**  
**Cable version, PA coated with  $\varnothing$  11 mm (0.433 inch)**

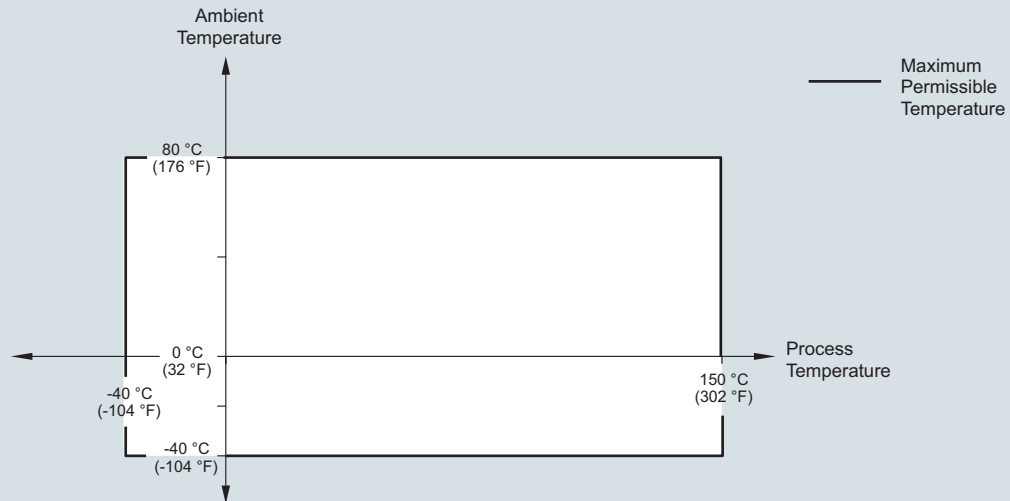

**SITRANS LG260, Ambient temperature/process temperature, temperature adapter version**  
**Cable version with  $\varnothing$  6 mm (0.236 inch)**  
**Cable version, PA coated with  $\varnothing$  11 mm (0.433 inch)**

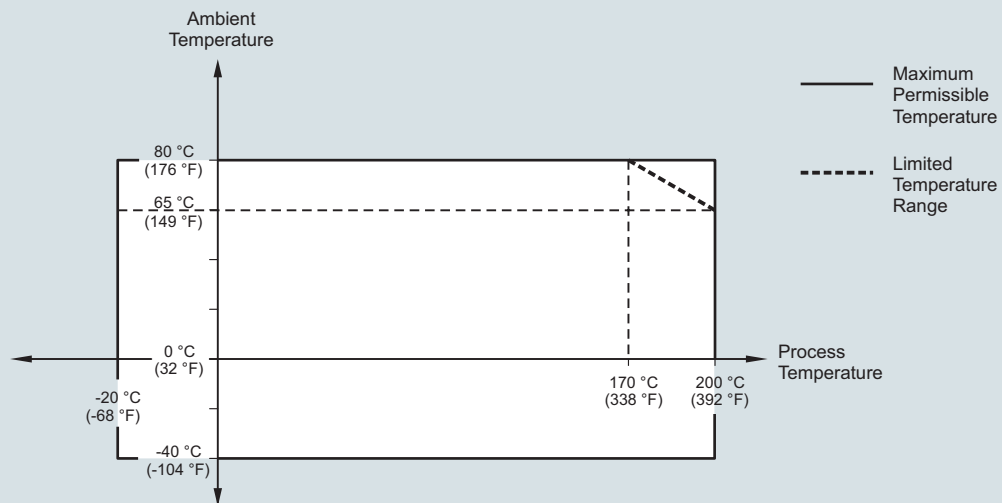

SITRANS LG260, ambient temperature/process temperature curves




## Level Measurement


Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

**SITRANS LG270, Ambient temperature/process temperature ( -196 ... +280 °C/-321 ... +536 °F version)**

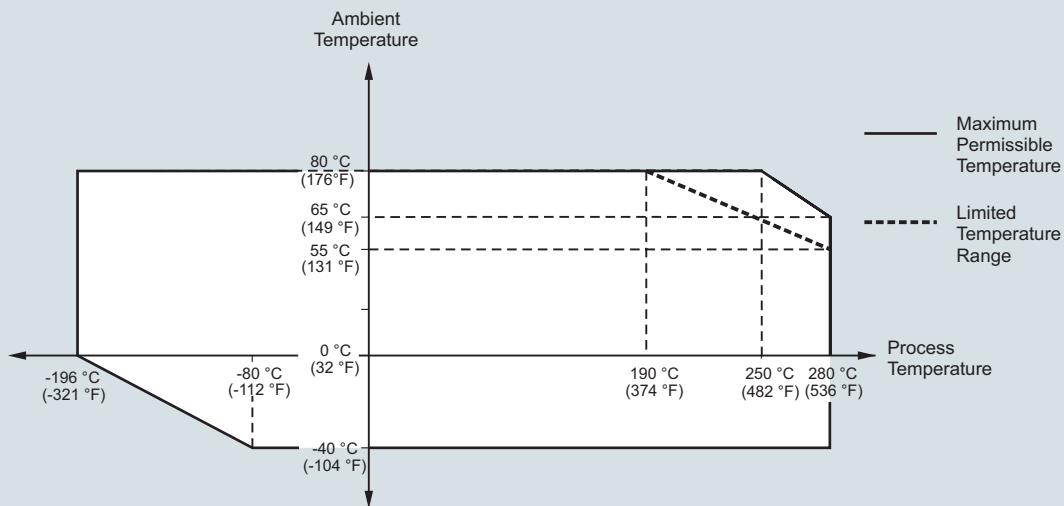


**SITRANS LG270, Ambient temperature/process temperature ( -196 ... +450 °C/-321 ... +842 °F version)**

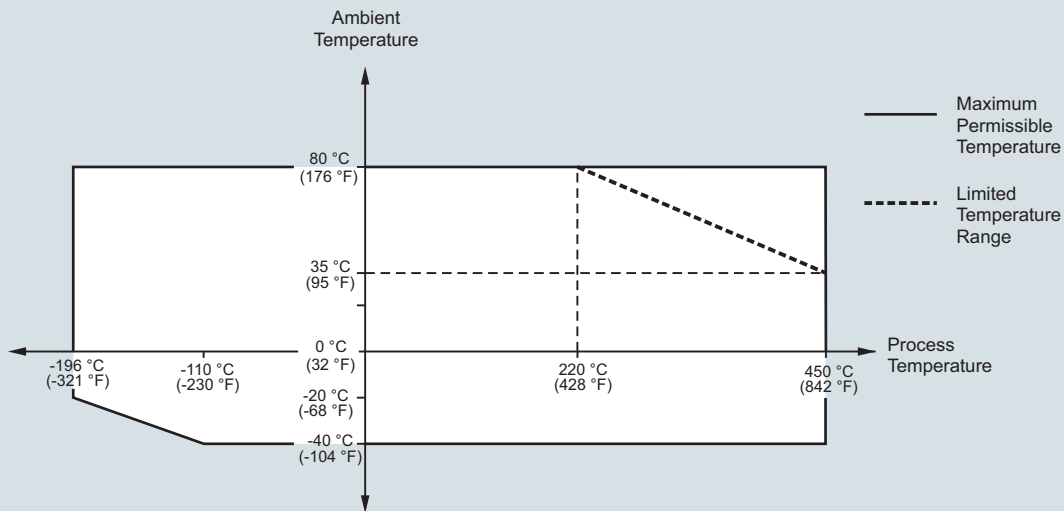

SITRANS LG270, ambient temperature/process temperature curves

**SITRANS LG270, Process pressure/process temperature ( -196 ... +450 °C/-321 ... +842 °F version)**

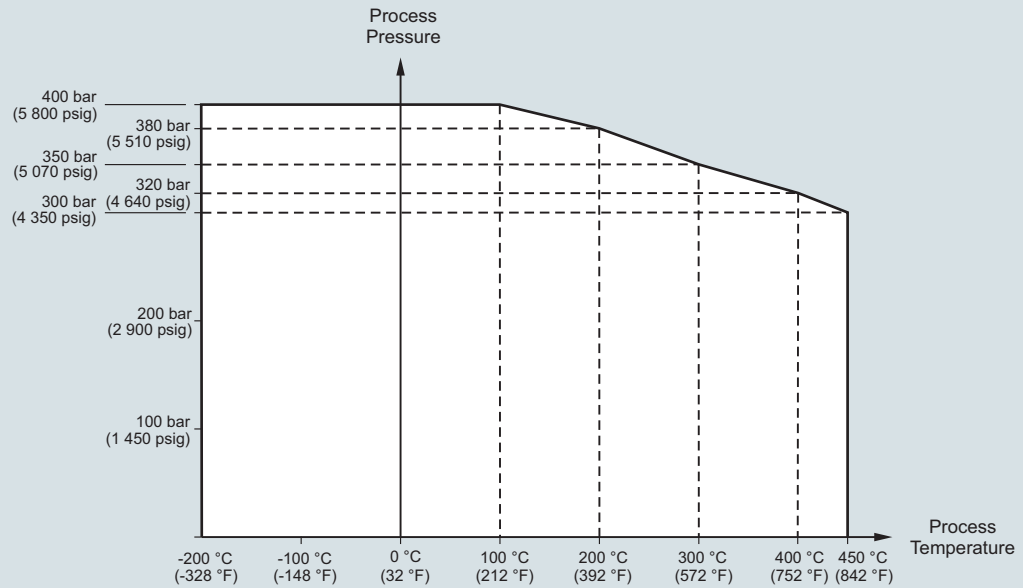

SITRANS LG270, process pressure/process temperature curve


## Level Measurement

Continuous level measurement  
Guided wave radar transmitters


### SITRANS LG series

#### Dimensional drawings


##### SITRANS LG Series plastic housing

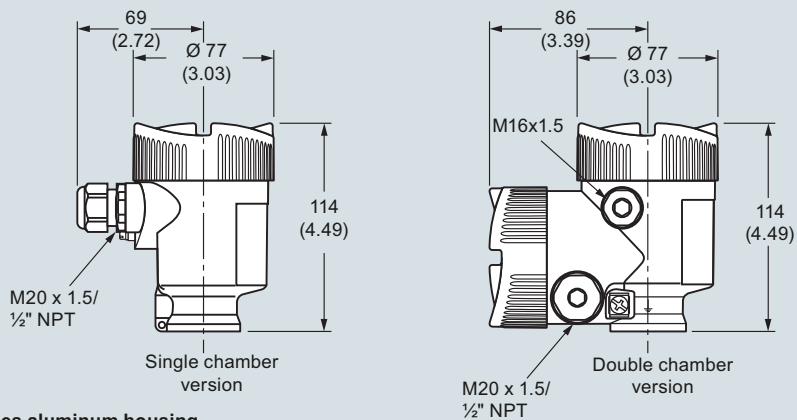

##### SITRANS LG Series aluminum housing

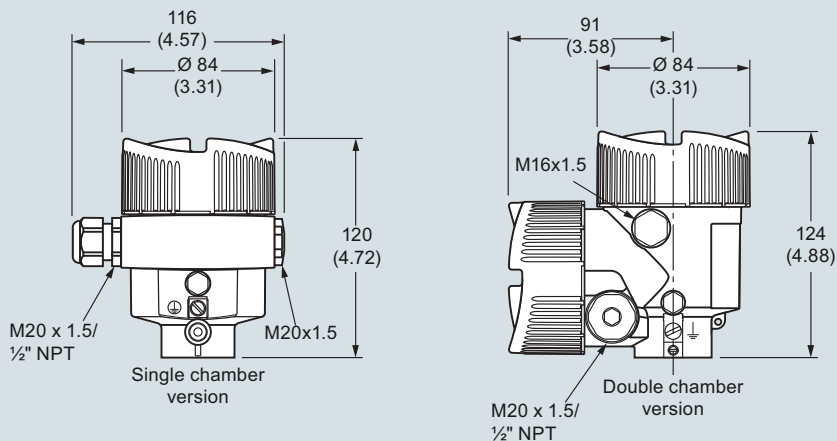

##### SITRANS LG Series stainless steel housing

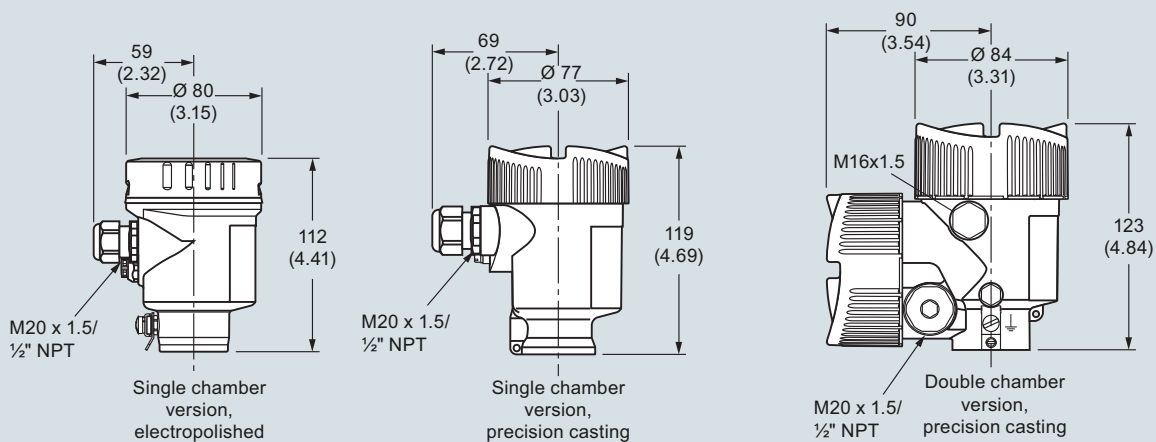


Note: For integrated display and adjustment module the housing is 9 (0.35) higher for all housing options


SITRANS LG series, dimensions in mm (inch)

**SITRANS LG240**


**Cable version Ø 4 (0.157), PFA coated**

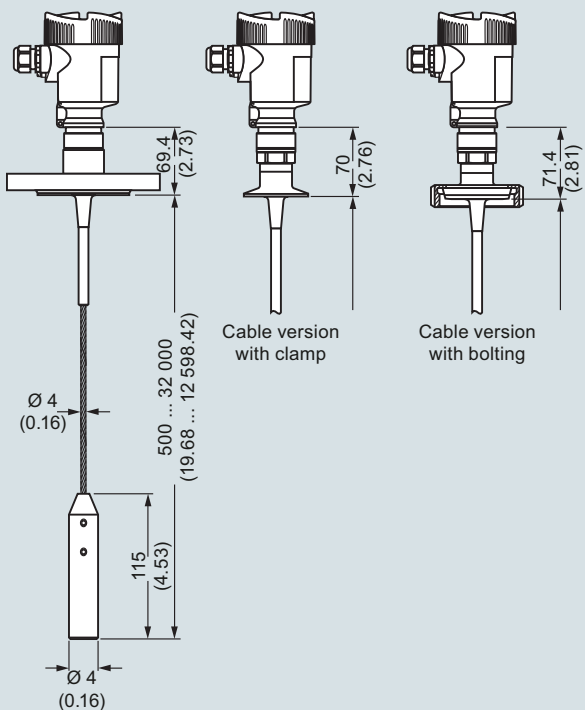


**Rod version Ø 10 (0.394), PFA coated**

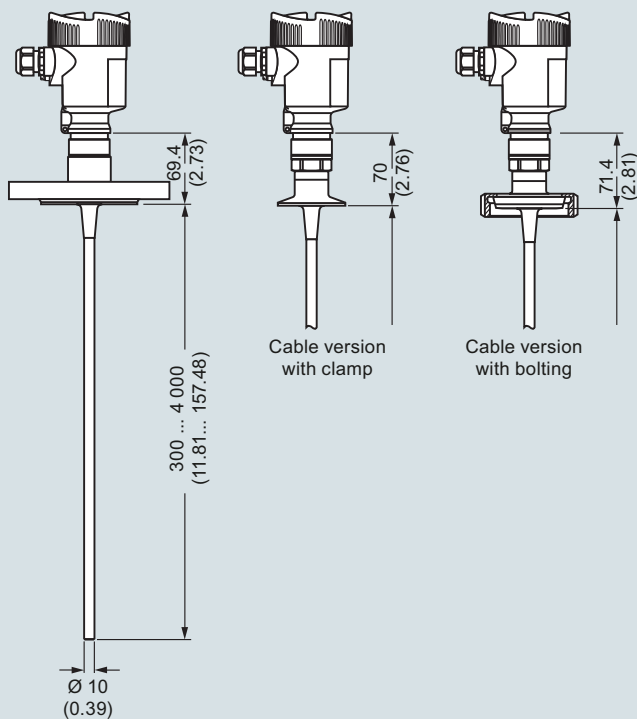

**Autoclaved version**

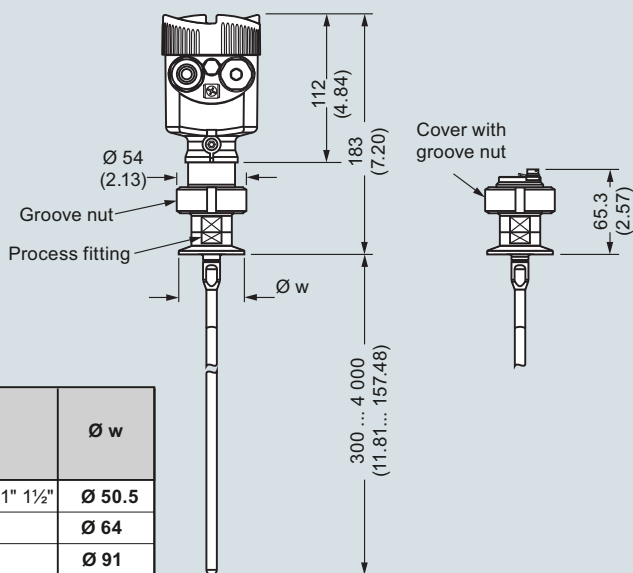

**Rod version Ø 8 (0.315), polished**

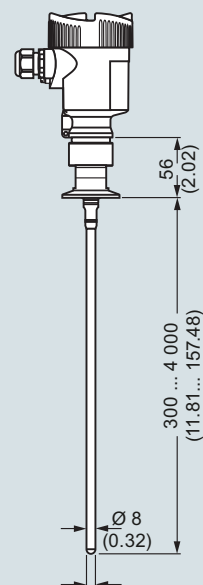

	Ø w
DIN DN 25 DN 32 DN 40/ 1" 1½"	Ø 50.5
DIN DN 50/ 2"	Ø 64
DIN DN 65/ 3"	Ø 91

SITRANS LG240, dimensions in mm (inch)


## Level Measurement

Continuous level measurement  
Guided wave radar transmitters


### SITRANS LG series

#### SITRANS LG250


##### Cable version with gravity weight

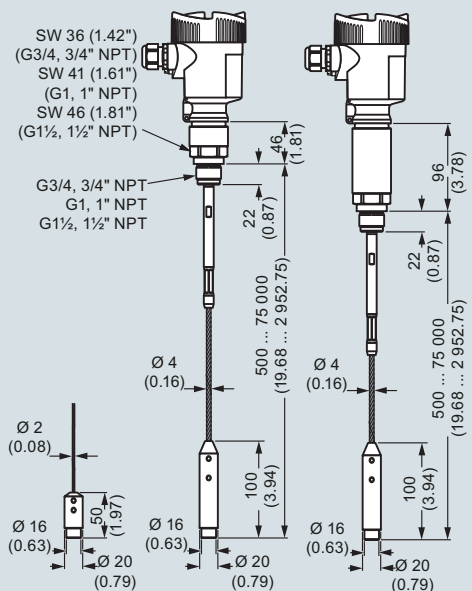

##### Cable version with centering weight

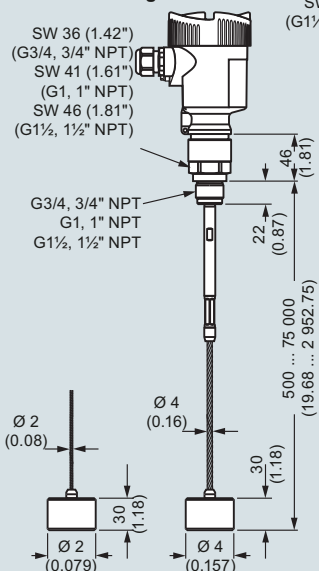


##### Rod version

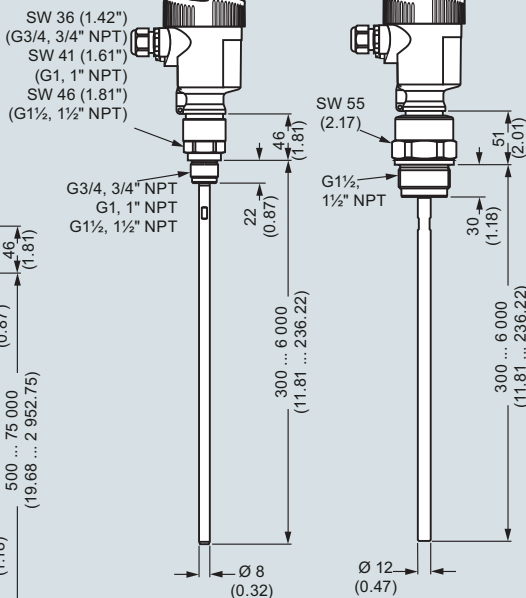


SITRANS LG250, dimensions in mm (inch)

#### SITRANS LG250, coax version


##### Coaxial version ø 21.3 (0.839)

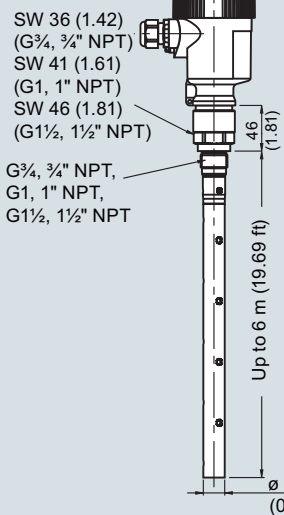

##### Coaxial version ø 42.2 (1.661)

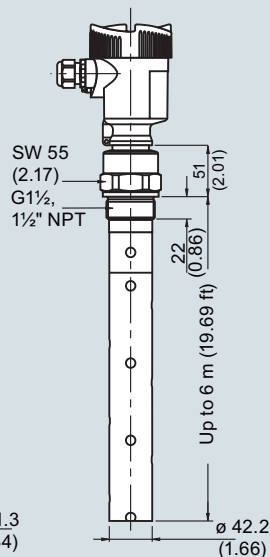

SITRANS LG250, dimensions in mm (inch)

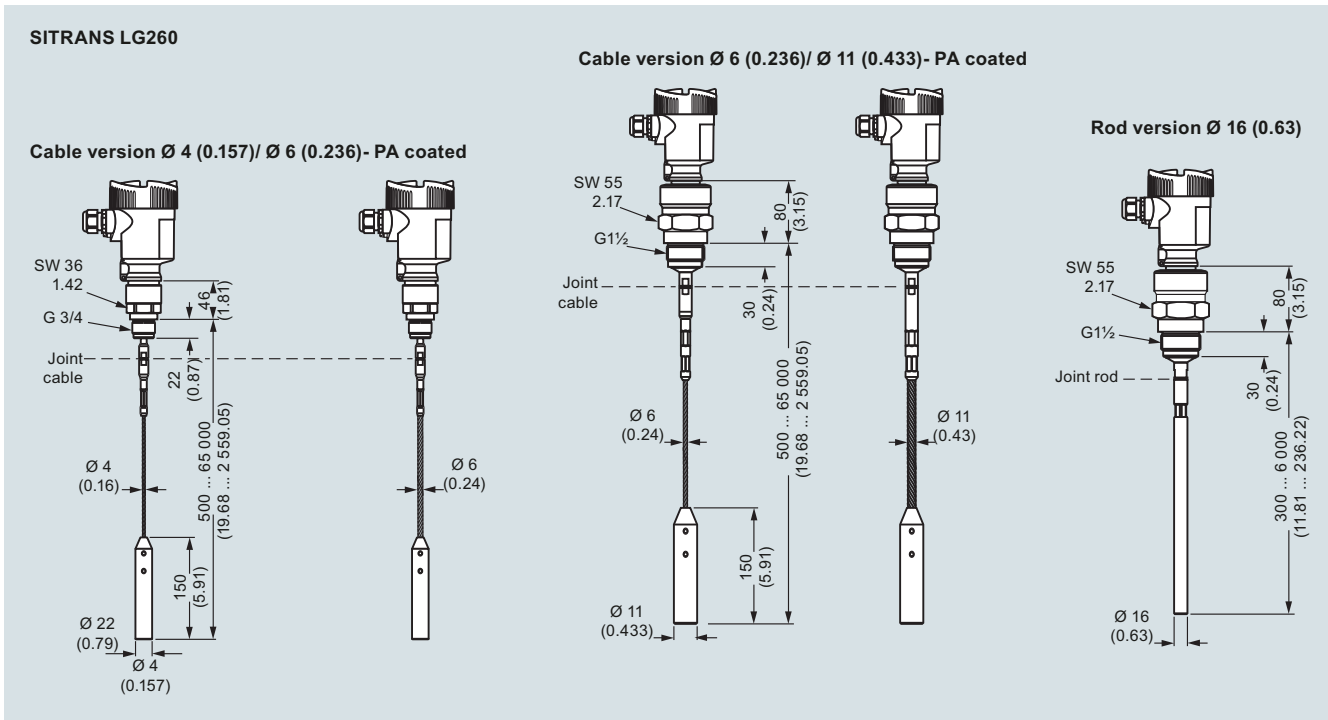


SITRANS LG260, dimensions in mm (inch)

# Level Measurement

Continuous level measurement  
Guided wave radar transmitters


## SITRANS LG series

4

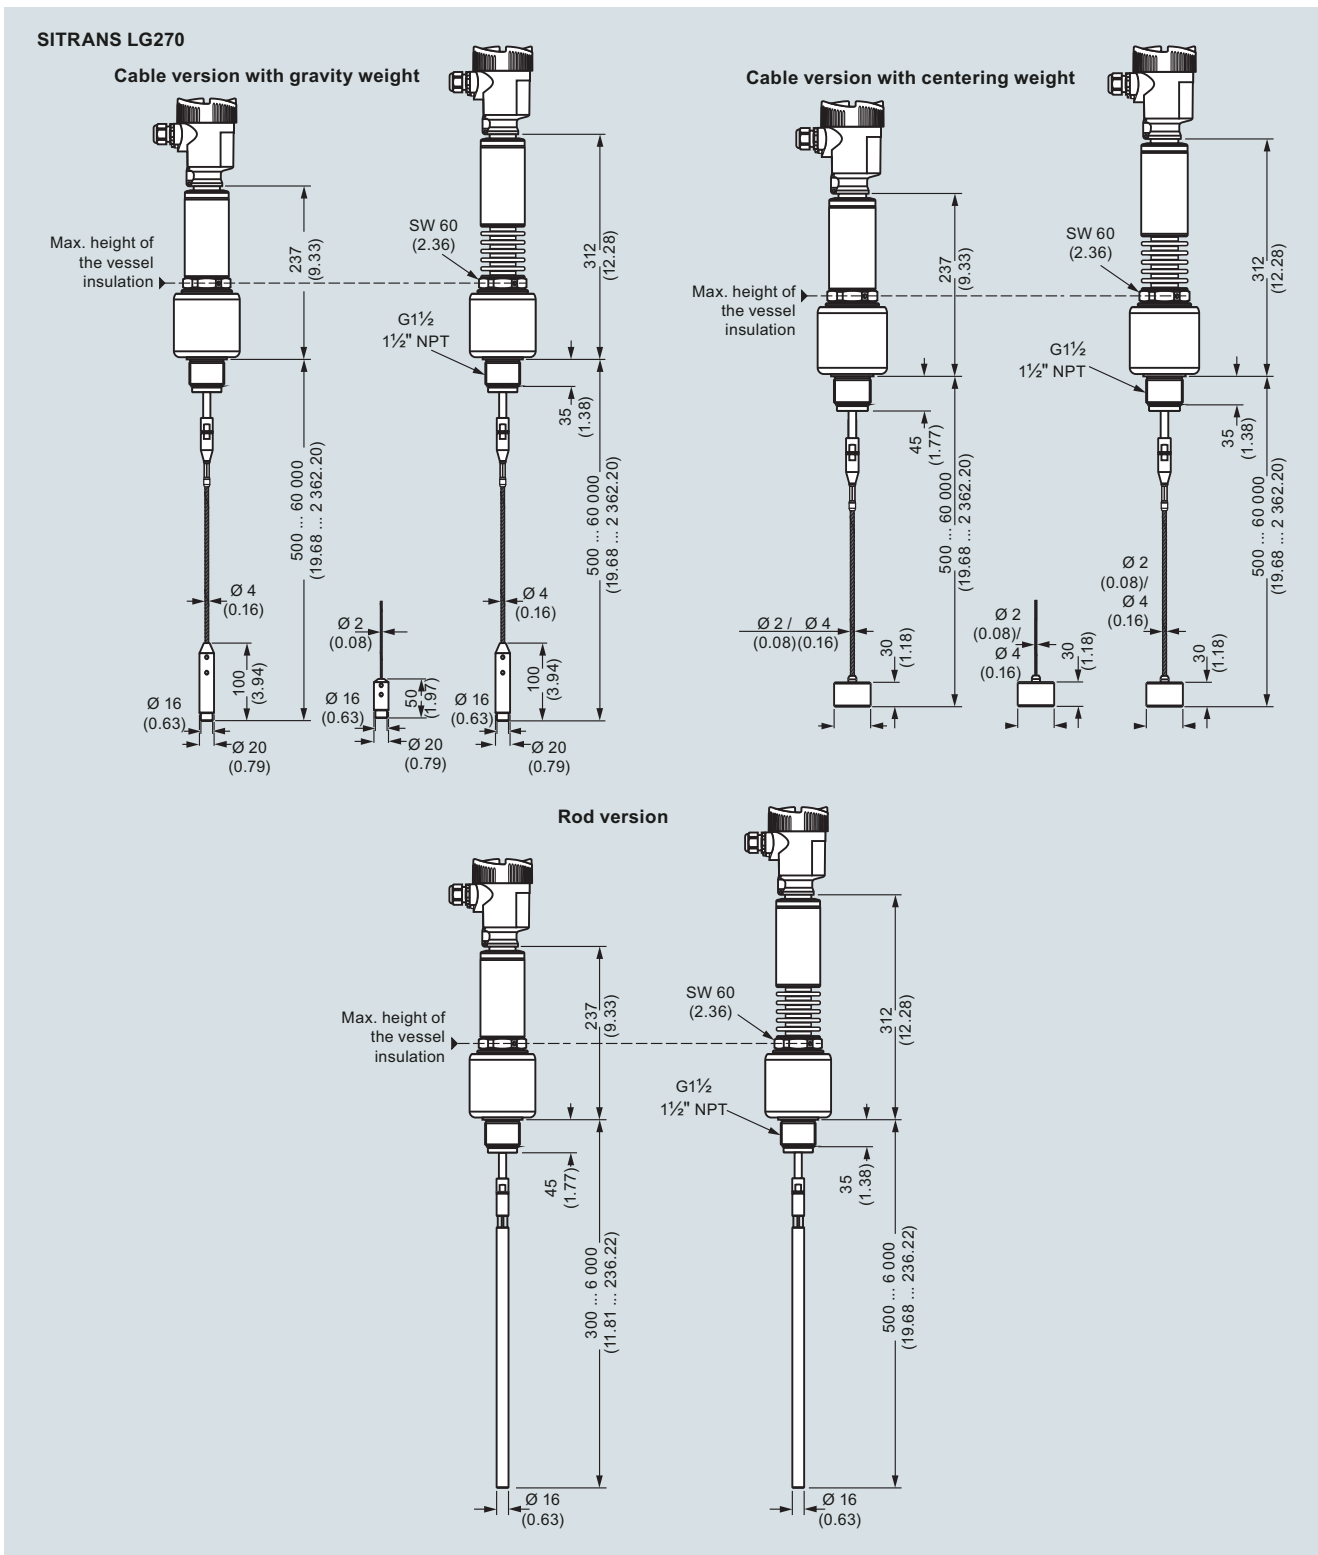


SITRANS LG270, dimensions in mm (inch)

**SITRANS LG270, coax version**

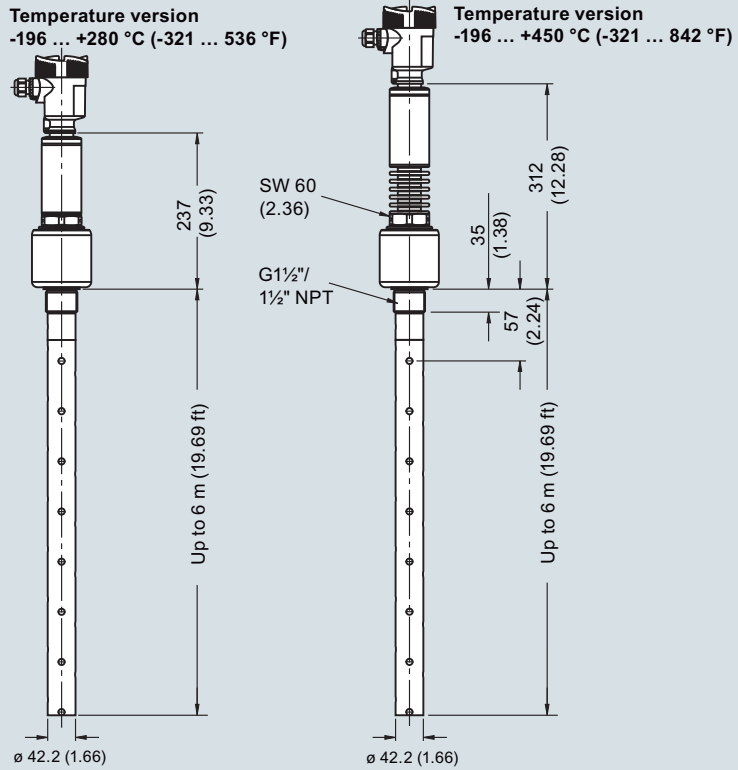

SITRANS LG270, dimensions in mm (inch)

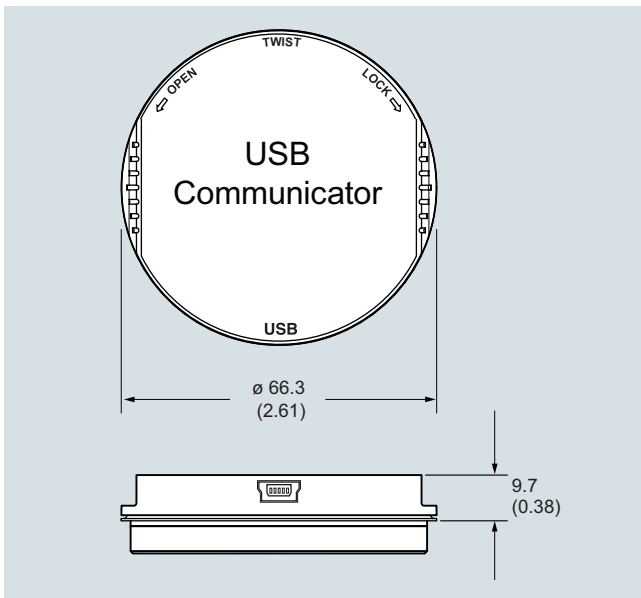

SITRANS LG USB Communicator, dimensions in mm (inch)




## Level Measurement


Continuous level measurement  
Guided wave radar transmitters

### SITRANS LG series

#### SITRANS LG remote interface, aluminum housing

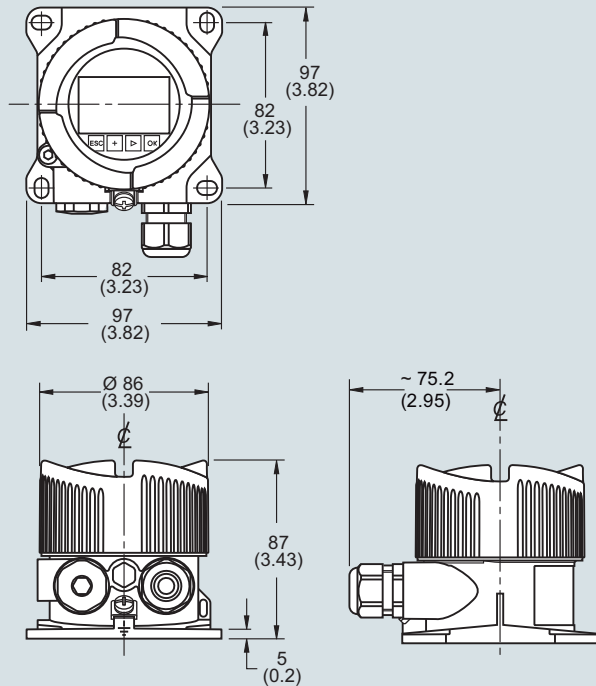


#### SITRANS LG remote interface, plastic housing

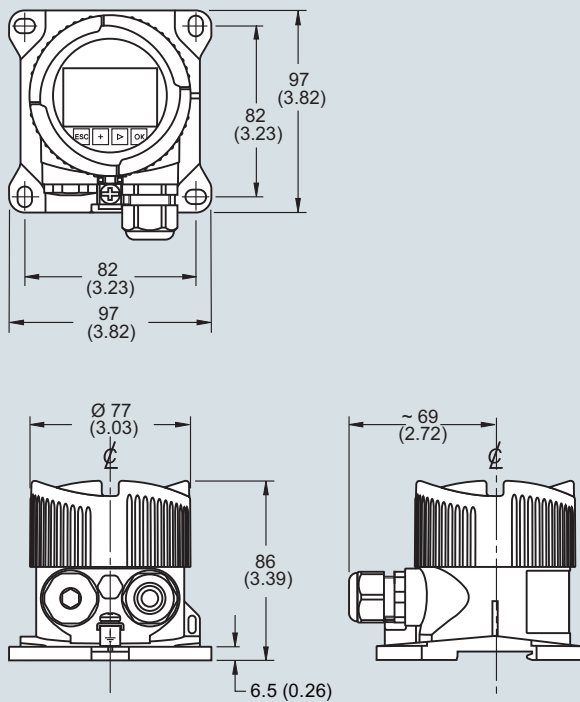


SITRANS LG remote interface, dimensions in mm (inch)

**Circuit diagrams**


**2-wire HART electronic option, electronics and connection compartment, single chamber housing**

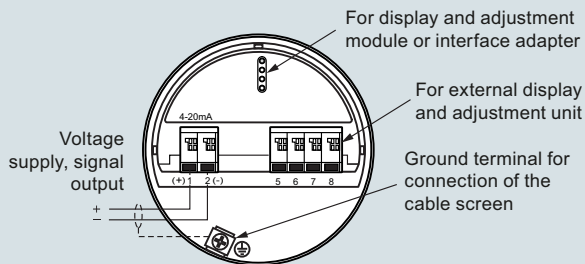

**2-wire HART electronic option, electronics compartment, double chamber housing**

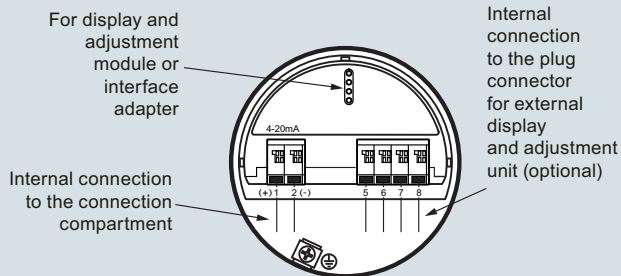


**2-wire HART electronic option, connection compartment, Ex-d-ia double chamber housing**

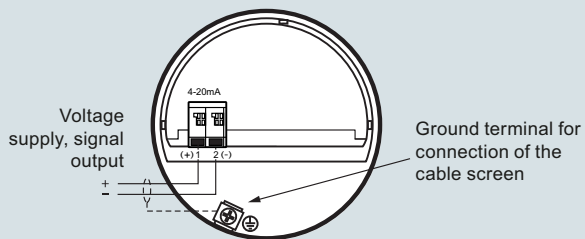


Note: All 2-wire HART connections and electronics are also available with SIL qualification.

SITRANS LG series connections

**4-wire HART electronic option, electronics compartment, double chamber housing**

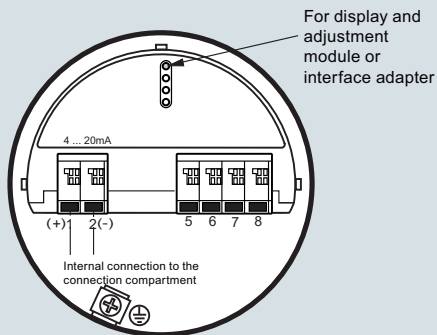

**4-wire electronic option, connection compartment, double chamber housing with mains voltage**

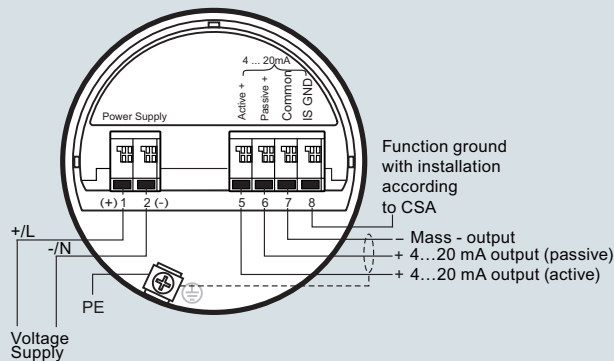


SITRANS LG series connections

## Level Measurement

Continuous level measurement  
Guided wave radar transmitters


### SITRANS LG series

#### Supplementary electronics

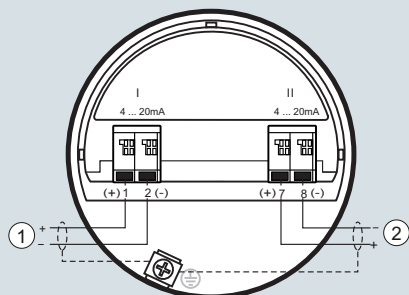


- ① First current output (I) - Voltage supply and signal output (HART)
- ② Second current output (II) - Voltage supply and signal output (without HART)

#### Connection compartment with low voltage

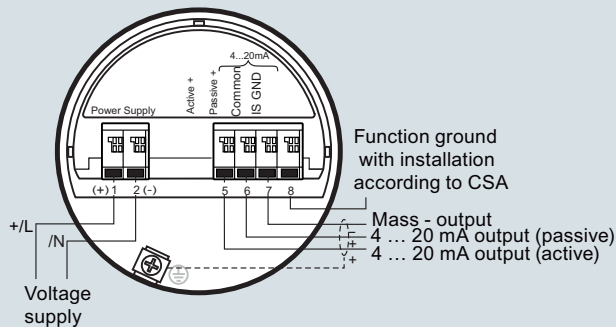


SITRANS LG series connections

#### Modbus electronic option, connection compartment

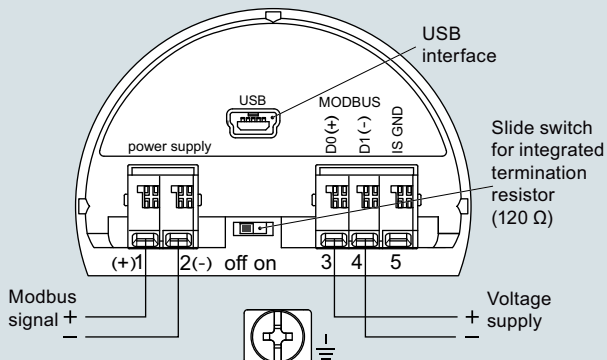


#### Modbus electronic option, electronics compartment, double chamber housing

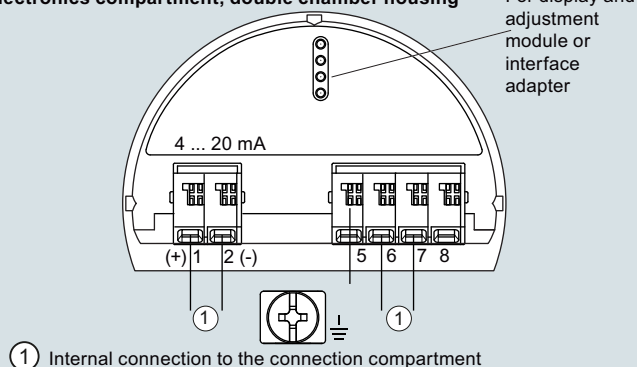


SITRANS LG series connections

#### PROFIBUS electronic option, connection compartment, double chamber housing

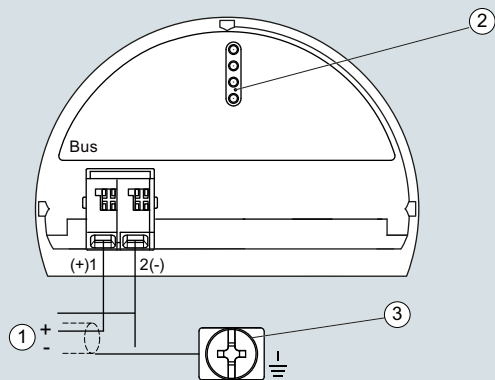

- ① Voltage supply, signal output
- ② For display and adjustment module or interface adapter
- ③ Ground terminal for connection of the cable screen


#### PROFIBUS electronic option, electronics compartment, double chamber housing

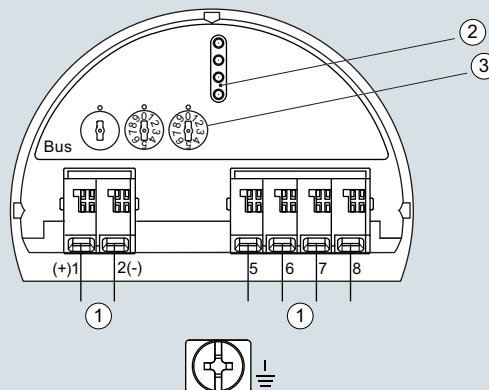

- ① Internal connection to the connection compartment
- ② Contact pins for the display and adjustment module or interface adapter
- ③ Selection switch for bus address


LG series connections

### PROFIBUS electronic option, electronics and connection compartment, single chamber housing

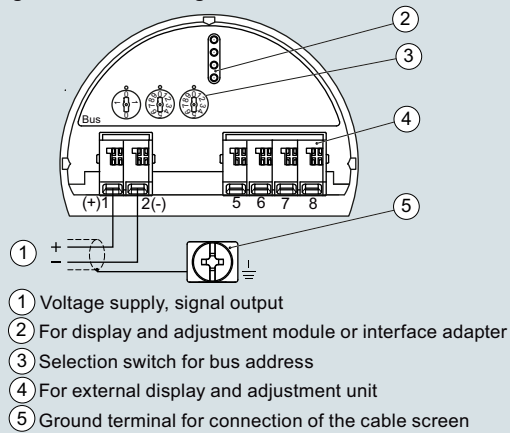


LG series connections

### LG series, FOUNDATION Fieldbus electronic option, electronic and terminal compartment, single chamber housing

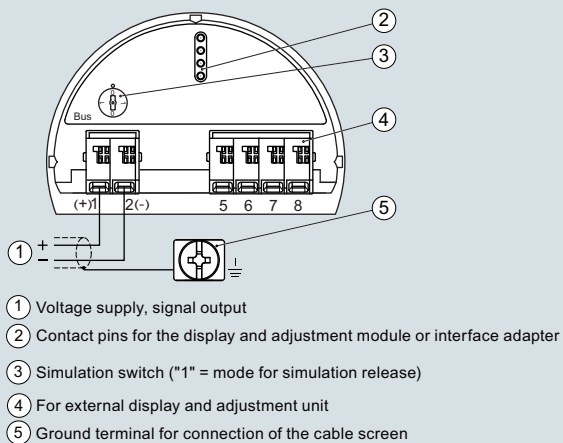

LG series connections

### LG series, FOUNDATION Fieldbus electronic option, electronic compartment, double chamber housing

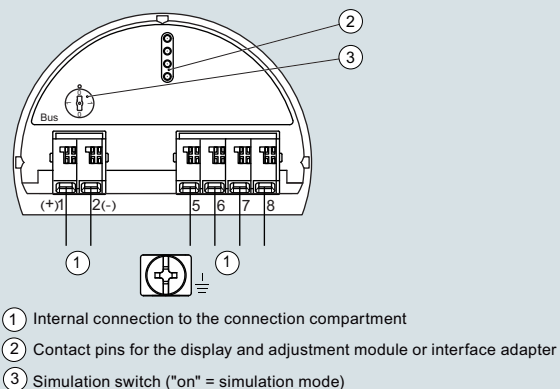

LG series connections

### LG series, FOUNDATION Fieldbus electronic option, terminal compartment, double chamber housing

