


## Level Measurement

Continuous level measurement  
Radar transmitters

### SITRANS LR200

#### Overview

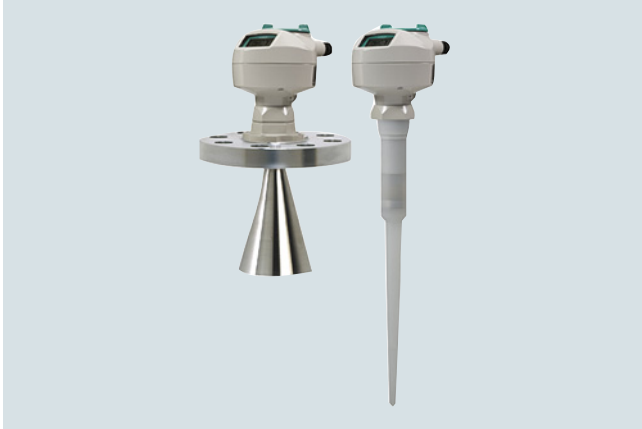

SITRANS LR200 is a 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature, pressure, agitation, and turbulence to a range of 20 m (65 ft).

#### Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- Communication using HART or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or SIMATIC PDM

#### Application

SITRANS LR200's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. It also features a built-in alphanumeric display in four languages.

The SITRANS LR200 has a standard Uni-Construction polypropylene rod antenna that offers excellent chemical resistance and is hermetically sealed. The Uni-Construction antenna features an internal, integrated shield that eliminates vessel nozzle interference.

Startup is easy with as few as two parameters for basic operation. Installation is simplified as the electronics are mounted on a rotating head that swivels, allowing the instrument to line up with conduit or wiring connections or simply to adjust the position for easy viewing. SITRANS LR200 features Process Intelligence signal-processing technology for superior reliability.

- Key Applications: liquid process vessels with agitators, vaporous liquids, high temperatures, asphalt


#### Configuration

##### Installation


Min. 300 mm (1 ft) for every 3 m (10 ft) of vessel wall.

##### Note:


- Beam angle is the width of the cone where the energy density is half of the peak energy density.
- Beam angle for horn antenna dependent on horn size
- The peak energy density is directly in front of and in line with the rod antenna.
- There is a signal transmitted outside of the beam angle; therefore false targets may be detected.




##### Mounting unit on vessel

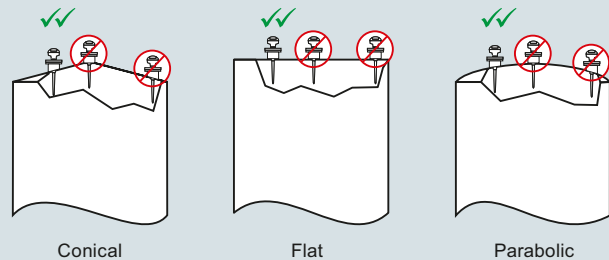

##### Mounting unit on stilling well

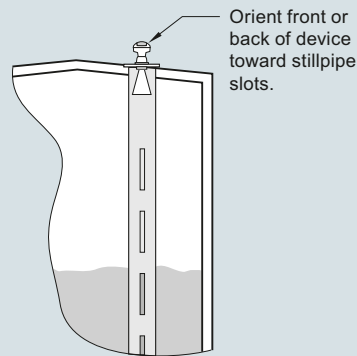


##### Mounting on a nozzle



SITRANS LR200 installation, dimensions in mm (inch)

## Integration

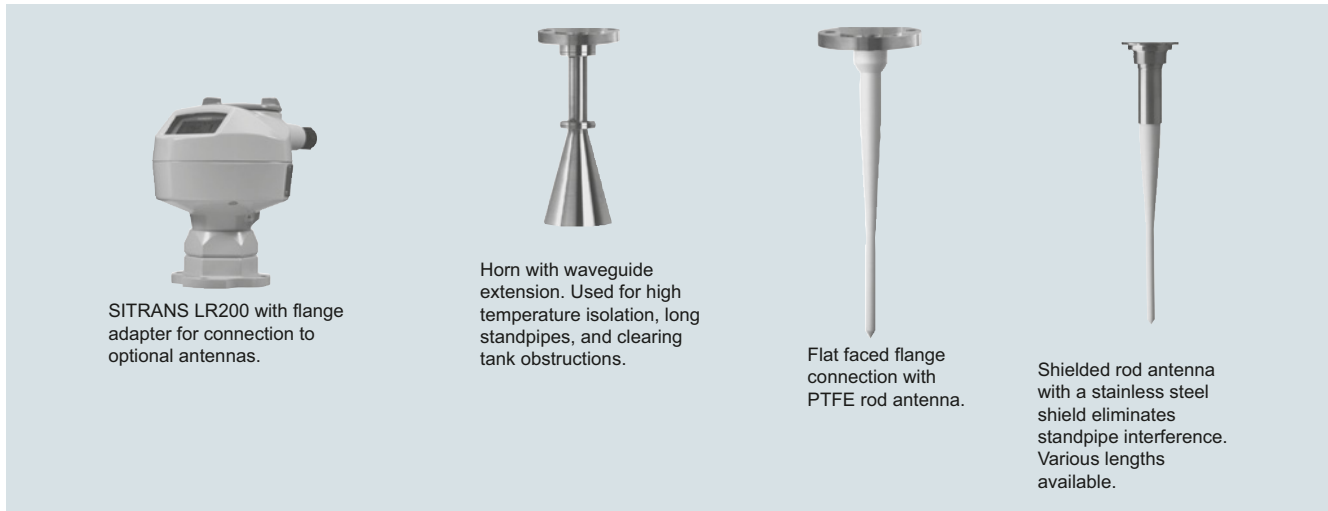

Antenna configurations for SITRANS LR200

Antenna types	Flat Faced Flange with Rod	Shielded Rod	Horn (4", 6", 8" sizes available)
<b>Connection type</b>	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6 inch)	Threaded 2" NPT, R 2" (BSPT), G 2" (BSPP) or flat faced flange nominal pipe sizes 80, 100 mm (3, 4 inch)	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6 inch)
<b>Wetted parts</b>	PTFE	PTFE, 316L stainless steel, FKM O-ring	316L stainless steel PTFE, FKM O-ring
<b>Extensions</b>	50 or 100 mm (2 or 4 inch) PTFE or UHMW-PE	100, 150, 200 or 250 mm (4, 6, 8 or 10 inch) standard shield length	Use waveguide for extensions to 6 m (20 ft) long
<b>Dielectric constant</b>	> 3	> 3	> 3
<b>Insertion length (max.)</b>	41 cm (16.3 inch)	Variable	Variable with extension
<b>Purging option (liquid or gas)</b>	No	No	Yes
<b>Sliding waveguide option for digesters<sup>1)</sup></b>	Yes	No	Yes
<b>Weight<sup>2)</sup></b>	6.5 kg (14.3 lb)	5.0 kg (11 lb)	7.5 kg (16.5 lb)

<sup>1)</sup> Maximum pressure 0.5 bar g at 60 °C (7.25 psi g at 140 °F)

<sup>2)</sup> Not including extensions, includes SITRANS LR200 and smallest process connection


## Level Measurement

Continuous level measurement  
Radar transmitters

### SITRANS LR200

#### Technical specifications

<b>Mode of operation</b>		<b>Power supply</b>		
Measuring principle	Radar level measurement	4 ... 20 mA/HART	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω Nominal 24 V DC (max. 30 V DC) with max. 250 Ω	
Frequency	C-band, approx. 6 GHz	<ul style="list-style-type: none"> <li>General Purpose, Non-incendive, Intrinsically Safe</li> <li>Flame proof, Increased safety, Explosion proof</li> </ul>		
Measuring range	0.3 ... 20 m (1.0 ... 65 ft)	PROFIBUS PA	<ul style="list-style-type: none"> <li>10.5 mA</li> <li>Per IEC 61158-2</li> </ul>	
<b>Output</b>		<b>Certificates and approvals</b>		
Analog output	4 ... 20 mA	General	CSA <sub>US/C</sub> , CE, FM, RCM	
Accuracy	± 0.02 mA	Marine	<ul style="list-style-type: none"> <li>Lloyd's Register of Shipping</li> <li>ABS Type Approval</li> </ul>	
Span	Proportional or inversely proportional	Radio	FCC, Industry Canada, and European (RED), RCM	
Communications	HART Optional: PROFIBUS PA (Profile 3.0, Class B)	Hazardous	<ul style="list-style-type: none"> <li>Intrinsically Safe (Brazil)</li> <li>Explosion Proof (Canada/USA)</li> </ul>	
Fail-safe	Programmable as high, low or hold (Loss of Echo)	<ul style="list-style-type: none"> <li>Intrinsically Safe (Canada/USA)</li> </ul>	INMETRO Ex ia IIC T4 Ga CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, T4 CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, T4 FM, Class I, Div. 2, Groups A, B, C, D, T5 NEPSI Ex d mb ia IIC T4/ Ex e mb ia IIC T4 ATEX II 1/2 G Ex d mb ia IIC T4 Ga/Gb ATEX II 1/2 G Ex e mb ia IIC T4 Ga/Gb ATEX II 1G Ex ia IIC T4 IECEX Ex ia IIC T4 EAC Ex ia	
<b>Performance (according to reference conditions IEC60770-1)</b>		<b>Programming</b>		
From end of antenna to 600 mm	40 mm (1.57 inch)	Intrinsically Safe Siemens handheld programmer	Infrared receiver	
Remainder of range	10 mm (0.4 inch) or 0.1 % of span (whichever is greater)	<ul style="list-style-type: none"> <li>Approvals for handheld programmer</li> </ul>	IS model: ATEX II 1GD Ex ia IIC T4 Ga Ex iaD 20 T135 °C T <sub>a</sub> = -20 ... +50 °C CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 T <sub>a</sub> = +50 °C	
<b>Rated operating conditions</b>		Handheld communicator	HART communicator 375	
Installation conditions	Indoor/outdoor	PC	<ul style="list-style-type: none"> <li>SIMATIC PDM</li> <li>AMS</li> <li>SITRANS DTM (for connecting to FDT such as PACTware or Field-care)</li> </ul>	
<ul style="list-style-type: none"> <li>Location</li> </ul>		Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages	
Ambient conditions (enclosure)		-40 ... +80 °C (-40 ... +176 °F)		
<ul style="list-style-type: none"> <li>Ambient temperature</li> <li>Installation category</li> <li>Pollution degree</li> </ul>			I	
<b>Medium conditions</b>				
Dielectric constant $\epsilon_r$	$\epsilon_r > 1.6$ (for $\epsilon_r < 3$ , use stillpipe)			
Vessel temperature and pressure	Varies with connection type; see Pressure/Temperature curves for more information			
<b>Design</b>				
Enclosure	Aluminum, polyester powder coated 2 x M20 x 1.5 or 2 x 1/2" NPT			
<ul style="list-style-type: none"> <li>Material</li> <li>Cable inlet</li> </ul>				
Degree of protection	Type 4X/NEMA 4X, Type 6/ NEMA 6, IP67, IP68			
Weight	< 2.82 kg (6.21 lb) (polypropylene rod antenna)			
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages			
Antenna	Polypropylene rod, hermetically sealed construction, optional PTFE Standard 100 mm (4 inch) shield for maximum 100 mm (4 inch) nozzle, or optional 250 mm (10 inch) long shield Refer to SITRANS LR200 Antennas for optional rods and horns			
<ul style="list-style-type: none"> <li>Material</li> </ul>				
<ul style="list-style-type: none"> <li>Dimensions</li> </ul>				
<ul style="list-style-type: none"> <li>Optional rods and horn</li> </ul>				
Process connections	1 1/2" NPT [(Taper), ANSI/ASME B1.20.1] R 1 1/2" [(BSPT), EN 10226], or G 1 1/2" [(BSPP), EN ISO 228-1] (polypropylene rod antenna) Refer to SITRANS LR200 Antennas for more connections			
<ul style="list-style-type: none"> <li>Process connection</li> </ul>				
<ul style="list-style-type: none"> <li>Flange connection</li> </ul>				

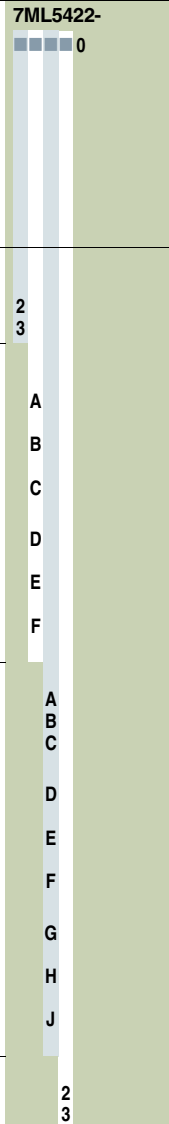Selection and Ordering data	Article No.	Selection and Ordering data	Order code
<b>SITRANS LR200, Uni-Construction polypropylene rod antenna version</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft). Max. 3 bar g (43.5 psi g) pressure and 80 °C (176 °F) ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	<b>7ML5422-</b>  <b>0</b>	<b>Further designs</b> Please add "-Z" to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 Namur NE43 compliant, device preset to failsafe < 3.6 mA <sup>1)</sup>	
<b>Enclosure/Cable inlet</b> Aluminum, epoxy painted 2 x 1/2" NPT 2 x M20 x 1.5	<b>2</b> <b>3</b>	<b>Operating Instructions</b> All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Polypropylene antenna type - (Max. 3 Bar pressure and 80 °C)</b> 1/2" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 100 mm shield R 1/2" [(BSPT), EN 10226], c/w integral 100 mm shield G 1/2" [(BSPP), EN ISO 228-1], c/w integral 100 mm shield 1/2" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 250 mm shield R 1/2" [(BSPT), EN 10226], c/w integral 250 mm shield G 1/2" [(BSPP), EN ISO 228-1], c/w integral 250 mm shield	<b>A</b> <b>B</b> <b>C</b> <b>D</b> <b>E</b> <b>F</b>	<b>Accessories</b> Handheld programmer, Intrinsically safe, EEx ia HART modem/USB (for use with a PC and SIMATIC PDM) One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART <sup>2)</sup> One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA <sup>2)</sup> One general purpose polymeric cable gland M20 x 1.5, rated -20 ... + 80 °C (-40 ... +176 °F)	Article No. <b>7ML1930-1BK</b> <b>7MF4997-1DB</b> <b>7ML1930-1AP</b> <b>7ML1930-1AQ</b> <b>7ML1930-1AM</b>
<b>Approvals</b> General Purpose, CE, RED, RCM General Purpose, CSA, FM, Industry Canada, FCC Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, RED, RCM; EAC Non incandive, FM Class I, Div. 2, Groups A, B, C, D, FCC <sup>1)</sup> Increased Safety, ATEX II 1/2G Ex e mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC <sup>2)3)</sup> Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC <sup>3)</sup> Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC <sup>1)3)</sup>	<b>A</b> <b>B</b> <b>C</b> <b>D</b> <b>E</b> <b>F</b> <b>G</b> <b>H</b> <b>J</b>	SITRANS RD100, loop powered display - see Chapter 7 SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7 For applicable back up point level switch - see point level measurement section	<b>7ML5741-...</b> <b>7ML5740-...</b> <b>7ML5744-...</b> <b>7ML5750-...</b>
<b>Communication/Output</b> PROFIBUS PA 4 ... 20 mA, HART, start-up at < 3.6 mA	<b>2</b> <b>3</b>	1) Available with communication option 3 only 2) Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.	

## Level Measurement

Continuous level measurement  
Radar transmitters

### SITRANS LR200

Selection and Ordering data	Article No.
<b>SITRANS LR200, Flange Adapter/PTFE Rod Antenna Version</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft). <a href="#">Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</a>	7ML5423-
<b>Antenna material (uses antenna adapter)</b> PTFE, uses antenna adapter and additional process connection below	1
<b>Process connection (refer to Pressure/Temperature curves, page 4/204)</b> Flanges (316L stainless steel) DN 50 PN 16, Type A, flat faced DN 80 PN 16, Type A, flat faced DN 100 PN 16, Type A, flat faced DN 150 PN 16, Type A, flat faced  2" ASME 150 lb, flat faced 3" ASME 150 lb, flat faced 4" ASME 150 lb, flat faced 6" ASME 150 lb, flat faced  DN 50 PN 40, flat faced DN 80 PN 40, flat faced DN 100 PN 40, flat faced DN 150 PN 40, flat faced  2" ASME 300 lb, flat faced, available with Pressure rating option 1 only due to flange hole spacing 3" ASME 300 lb, flat faced 4" ASME 300 lb, flat faced 6" ASME 300 lb, flat faced  JIS DN 50 10K JIS DN 80 10K JIS DN 100 10K JIS DN 150 10K (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)  Threaded connection (316L stainless steel) 1½" NPT [(Taper), ANSI/ASME B1.20.1] 2" NPT [(Taper), ANSI/ASME B1.20.1] R 1½" [(BSPT), EN 10226]  R 2" [(BSPT), EN 10226] G 1½" [(BSPP), EN ISO 228-1] G 2" [(BSPP), EN ISO 228-1]	AA BA CA DA  FB GB HB JB  AC BC CC DC FD  GD HD JD  AE BE CE DE  LA MA LC  MC LE ME
<b>Antenna extensions or Inactive shield length</b> No antenna extension 50 mm (2 inch) extension, PTFE 100 mm (4 inch) extension, PTFE  100 mm (4 inch) extension, 316L stainless steel shield <sup>1)</sup> 150 mm (6 inch) extension, 316L stainless steel shield <sup>1)</sup> 200 mm (8 inch) extension, 316L stainless steel shield <sup>1)</sup>  250 mm (10 inch) extension, 316L stainless steel shield <sup>1)</sup>	0 1 2  3  4  5  6
<b>Process seal/gasket</b> Integral Gasket, for flat faced flange process connections only, not for Antenna extension options 3 ... 6 FKM O-ring, not available for combination of flat faced flanges with Antenna extension options 0, 1 or 2	0  1

Selection and Ordering data	Article No.
<b>SITRANS LR200, Flange Adapter/PTFE Rod Antenna Version</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	7ML5423-
<b>Enclosure/Cable inlet</b> Aluminum, Epoxy painted 2 x ½" NPT 2 x M20 x 1.5	2 3
<b>Communication/Output</b> PROFIBUS PA 4 ... 20 mA, HART, start-up at < 3.6 mA	B C
<b>Approvals</b> General Purpose, CE, RED, RCM General Purpose, CSA FM, Industry Canada, FCC Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada  Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, RED, RCM; EAC Non incensive, FM Class I, Div. 2, Groups A, B, C, D, FCC <sup>2)</sup>  Increased Safety, ATEX II 1/2G Ex e mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC <sup>3/4)</sup> Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/ Gb, CE, RED, RCM; EAC <sup>4)</sup> Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC <sup>2/4)</sup>	A B C  D E F G H J
<b>Pressure rating</b> Rating per Pressure/Temperature curves in manual 0.5 bar g (7.25 psi g) maximum	0 1

- 1) Available with process connection options BA, CA, DA, GB, HB, JB, BC, CC, DC, GD, HD, JD, BE, CE, DE, MA, MC, ME only
- 2) Available with enclosure option 2 only
- 3) Available with enclosure option 3 only
- 4) Available with communication option C only

Selection and Ordering data	Order code
<b>Further designs</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]; Measuring-point number/identification (max. 27 characters); specify in plain text	<b>Y15</b>
Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	<b>C11</b>
Material inspection Certificate Type 3.1 per EN 10204	<b>C12</b>
Namur NE43 compliant, device preset to failsafe < 3.6 mA <sup>3)</sup>	<b>N07</b>
<b>Operating Instructions</b>	
All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Accessories</b>	
Handheld programmer, Intrinsically safe, EEx ia	<b>7ML1930-1BK</b>
Antenna, rod, PTFE	<b>7ML1830-1HC</b>
Antenna extension, 50 mm (2 inch), PTFE	<b>7ML1830-1CH</b>
Antenna extension, 100 mm (4 inch), PTFE	<b>7ML1830-1CG</b>
HART modem / USB (for use with PC and SIMATIC PDM)	<b>7MF4997-1DB</b>
Metallic cable gland M20 x 1.5, rated -40 °C (-40 °F) ... 80 °C (176 °F), HART (two are required)	<b>7ML1930-1AP</b>
Metallic cable gland M20 x 1.5, rated -40 °C (-40 °F) ... 80 °C (176 °F), PROFIBUS PA (two required)	<b>7ML1930-1AQ</b>
One General Purpose polymeric cable gland M20 x 1.5, rating for -20 °C (-4°F) ... + 80 °C (176 °F)	<b>7ML1930-1AM</b>
SITRANS RD100, loop powered display - see Chapter 7	<b>7ML5741-...</b>
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	<b>7ML5740-...</b>
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	<b>7ML5744-...</b>
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	<b>7ML5750-...</b>
For applicable back up point level switch - see point level measurement section	

## Level Measurement

Continuous level measurement  
Radar transmitters

### SITRANS LR200

#### Selection and Ordering data

Article No.

#### SITRANS LR200, Flange adapter/Horn Antenna version

7ML5425-

2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).

➔ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Antenna material (uses antenna adapter)

316L stainless steel with PTFE cone emitter  
316L stainless steel with PTFE cone emitter and purge connection with 1/8" NPT inlet<sup>1)</sup>

0

1

#### Process connection (refer to Pressure/ Temperature curves, page 4/204)

Flanges (316L stainless steel)

DN 50 PN 16 EN 1092-1 Type A flat faced<sup>1)</sup>

DN 80 PN 16 EN 1092-1 Type A flat faced

DN 100 PN 16 EN 1092-1 Type A flat faced

DN 150 PN 16 EN 1092-1 Type A flat faced

DN 200 PN 16 EN 1092-1 Type A flat faced

AA

BA

CA

DA

EA

DN 80 PN 10/16 DIN EN 1092-1 Type B1 raised face<sup>2)</sup>

DN 100 PN 10/16 DIN EN 1092-1 Type B1 raised face<sup>3)</sup>

DN 150 PN 10/16 DIN EN 1092-1 Type B1 raised face<sup>3)</sup>

DN 200 PN 16 DIN EN 1092-1 Type B1 raised face<sup>3)</sup>

BF

CF

DF

EF

2" ASME 150 lb, flat faced<sup>1)</sup>

3" ASME 150 lb, flat faced

4" ASME 150 lb, flat faced

6" ASME 150 lb, flat faced

8" ASME 150 lb, flat faced

FB

GB

HB

JB

KB

DN 50 PN 40, flat faced<sup>3)</sup>

DN 80 PN 40, flat faced<sup>3)</sup>

DN 100 PN 40, flat faced<sup>3)</sup>

AC

BC

CC

DN 80 PN 25/40 DIN EN 1092-1 Type B1 raised face<sup>3)</sup>

DN 100 PN 25/40 DIN EN 1092-1 Type B1 raised face<sup>3)</sup>

DN 150 PN 25/40 DIN EN 1092-1 Type B1 raised face<sup>3)</sup>

CG

DG

EG

2" ASME 300 lb, flat faced<sup>1)3)</sup>

3" ASME 300 lb, flat faced<sup>3)</sup>

4" ASME 300 lb, flat faced<sup>3)</sup>

FD

GD

HD

JIS DN 50 10K<sup>1)</sup>

JIS DN 80 10K

JIS DN 100 10K

JIS DN 150 10K

JIS DN 200 10K

AE

BE

CE

DE

EE

(Note: Flange bolting patterns and facings dimensionally correspond to the applicable

ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)

#### Communication/Output

PROFIBUS PA

4 ... 20 mA, HART, start-up at < 3.6 mA

1

2

#### Selection and Ordering data

Article No.

#### SITRANS LR200, Flange adapter/Horn Antenna version

7ML5425-

2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).

#### Process seal/gasket

FKM (-40 ... +200 °C)

Nitrile (-40 ... +60 °C)

0

1

#### Enclosure/Cable inlet

Aluminum, Epoxy painted

2 x 1/2" NPT

2 x M20 x 1.5

2

3

#### Horn size/Waveguide options

80 mm (3 inch) horn<sup>3)</sup>

100 mm (4 inch) horn<sup>4)</sup>

150 mm (6 inch) horn

200 mm (8 inch) horn

100 mm (4 inch) horn with 100 mm (4 inch)

waveguide extension<sup>4)</sup>

100 mm (4 inch) horn with 150 mm (6 inch)

waveguide extension<sup>4)</sup>

100 mm (4 inch) horn with 200 mm (8 inch)

wave-guide extension<sup>4)</sup>

100 mm (4 inch) horn with 250 mm (10 inch)

waveguide extension<sup>4)</sup>

150 mm (6 inch) horn with 100 mm (4 inch)

waveguide extension

150 mm (6 inch) horn with 150 mm (6 inch)

waveguide extension

150 mm (6 inch) horn with 200 mm (8 inch)

waveguide extension

150 mm (6 inch) horn with 250 mm (10 inch)

waveguide extension

200 mm (8 inch) horn with 100 mm (4 inch)

waveguide extension

200 mm (8 inch) horn with 150 mm (6 inch)

waveguide extension

200 mm (8 inch) horn with 200 mm (8 inch)

waveguide extension

200 mm (8 inch) horn with 250 mm (10 inch)

waveguide extension

B

C

D

E

F

G

H

J

K

L

M

N


P

Q

R

S

4

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
<b>SITRANS LR200, Flange adapter/Horn Antenna version</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	<b>7ML5425-</b> 	<b>Further designs</b> Please add <b>"-Z"</b> to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	
<b>Approvals</b> General Purpose, CE, RED, RCM General Purpose, CSA, FM, Industry Canada, FCC Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, RED, RCM; EAC Non incandive, FM Class I, Div. 2, Groups A, B, C, D, FCC <sup>4)</sup> Increased Safety, ATEX II 1/2G Ex e mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC <sup>5)6)</sup> Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC <sup>6)</sup> Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC <sup>5)6)</sup>	<b>A</b> <b>B</b> <b>C</b> <b>D</b> <b>E</b> <b>F</b> <b>G</b> <b>H</b> <b>J</b>	Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 Material inspection Certificate Type 3.1 per EN 10204 Namur NE43 compliant, device preset to failsafe < 3.6 mA <sup>1)</sup>	<b>Y15</b> <b>C11</b> <b>C12</b> <b>N07</b>
<b>Pressure rating</b> Rating per Pressure/Temperature curves in manual 0.5 bar g (7.25 psi g) maximum 0 1		<b>Operating Instructions</b> All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
1) Available with pressure rating option 1 only 2) Available with Antenna Material options 0 and 1 only 3) For stillpipe applications only 4) Available with enclosure option 2 only 5) Available with enclosure option 3 only 6) Available with communication option 2 only		<b>Accessories</b> Handheld programmer, Intrinsically safe, EEx ia HART modem/USB (for use with a PC and SIMATIC PDM) One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART <sup>2)</sup> One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA <sup>3)</sup> One general purpose polymeric cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F) SITRANS RD100, loop powered display - see Chapter 7 SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7 For applicable back up point level switch - see point level measurement section	Article No. <b>7ML1930-1BK</b> <b>7MF4997-1DB</b> <b>7ML1930-1AP</b> <b>7ML1930-1AQ</b> <b>7ML1930-1AM</b> <b>7ML5741-...</b> <b>7ML5740-...</b> <b>7ML5744-...</b> <b>7ML5750-...</b>
		1) Available with communication option 2 only 2) Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended. 3) Available with enclosure option 2 only	




## Level Measurement

Continuous level measurement




Radar transmitters

### SITRANS LR200

#### Characteristic curves

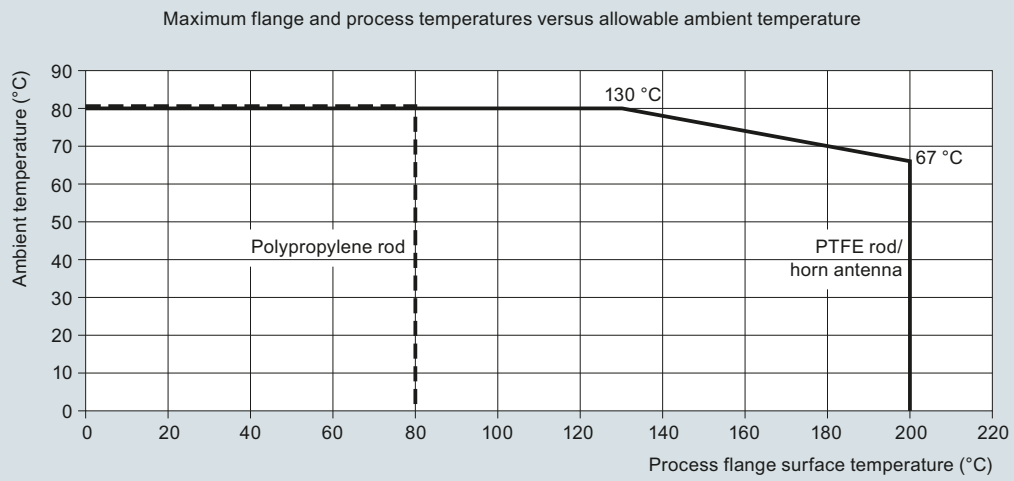

SITRANS LR200 ambient/process flange surface temperature curve

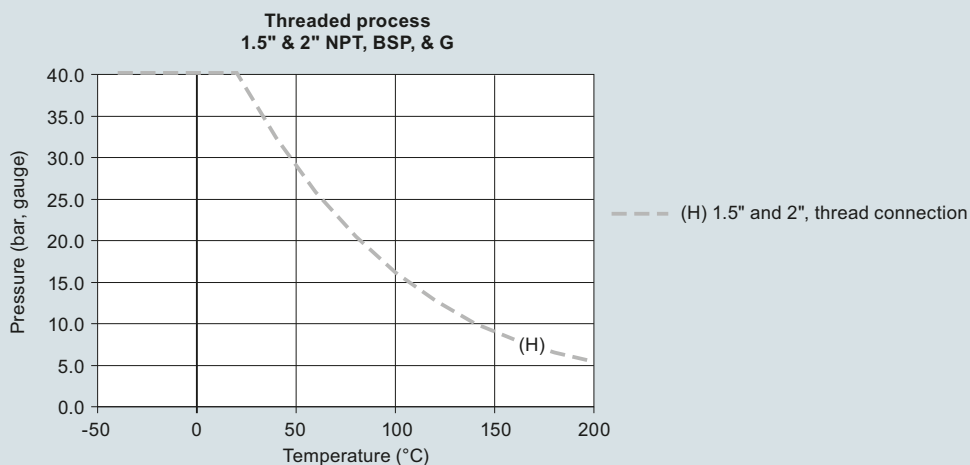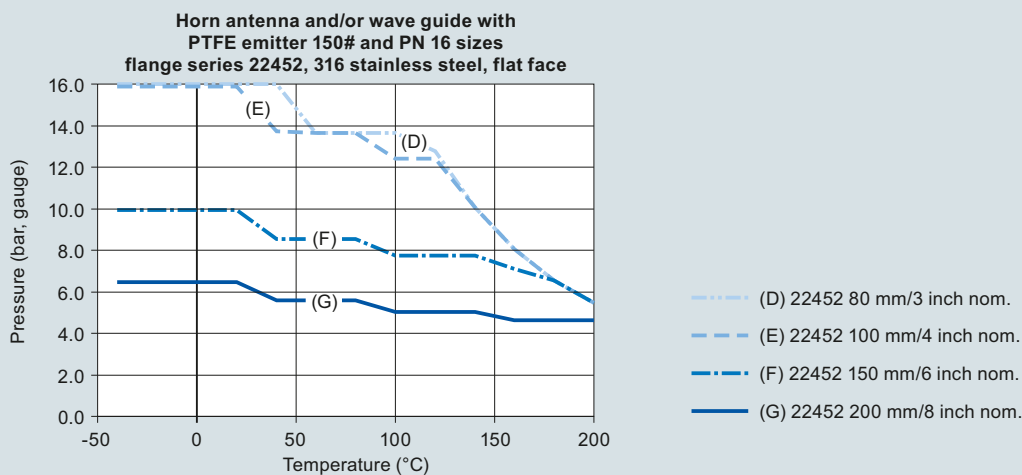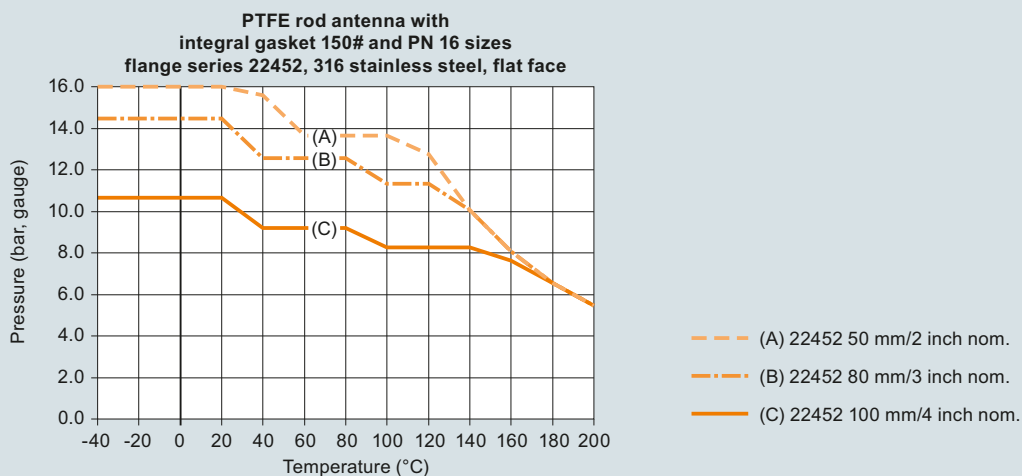

SITRANS LR200 process pressure/temperature derating curves

## Level Measurement


Continuous level measurement  
Radar transmitters

### SITRANS LR200


#### Dimensional drawings

4


**SITRANS LR200 with polypropylene shielded rod antenna**

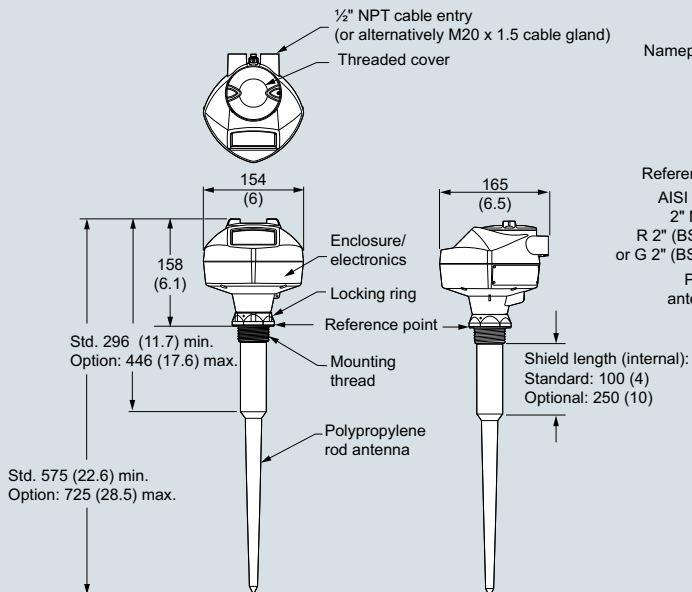


**PTFE rod antenna, threaded**

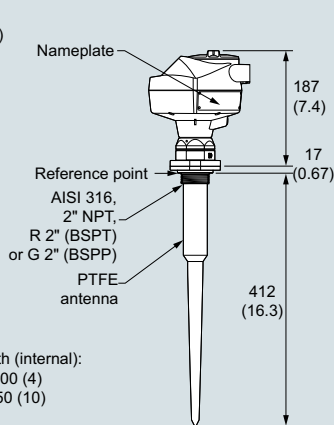

**Threaded connection PTFE rod, external shield**

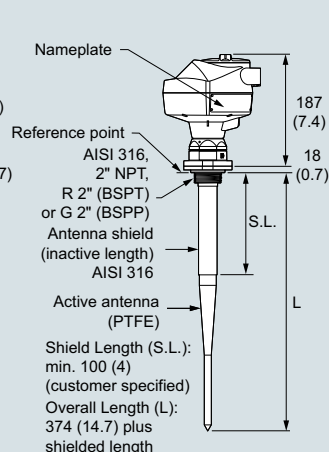

**Horn antenna with flat faced flange**

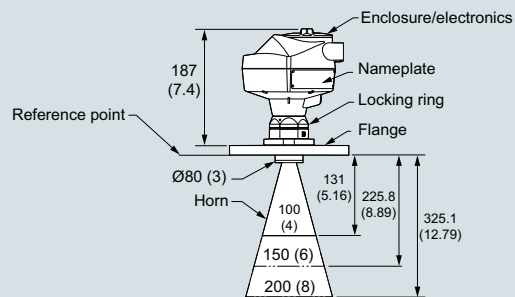

SITRANS LR200, dimensions in mm (inch)

## Circuit diagrams

Connect the wires to the terminals as shown: the polarity is identified on the terminal block.

Gland may or may not be provided, depending on approval option.

Shield for HART and PROFIBUS PA intrinsically safe versions only.

**Hand programmer**

SIEMENS			
1	2	3	4
5	6	7	8
9	0	.	+/−
C	⏪	⏩	⏴
←	↑	↓	→

Part number:  
7ML1930-1BK

**Notes:**

1. DC terminal shall be supplied from an SELV source in accordance with IEC 1010-1 Annex H.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 ... 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR200 connections



## Level Measurement

Continuous level measurement  
Radar transmitters



### SITRANS LR200 Specials






#### Selection and ordering data

##### SITRANS LR200 Specials

	Article No.
<b>SITRANS LR200 PROFIBUS PA Aluminum Enclosure Kit with electronics and covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna</b> 	
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with PROFIBUS PA communication, no process connection.	<b>A5E01483420</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with PROFIBUS PA communication, no process connection.	<b>A5E01483440</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, M20 cable inlet, approval option C, with PROFIBUS PA communication, no process connection.	<b>A5E01483456</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option C, with PROFIBUS PA communication, no process connection.	<b>A5E01483547</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option E, with PROFIBUS PA communication, no process connection.	<b>A5E01483559</b>
<b>SITRANS LR200 HART aluminum enclosure kit with electronics and covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna</b> 	
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E02956419</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E02956420</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option G, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E02956421</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option H, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E02956422</b>

##### SITRANS LR200 Specials

	Article No.
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E03617085</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option B, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E03617086</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option C, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E03617087</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection.	<b>A5E03617088</b>
<b>Sun shield for SITRANS LR200 enclosure, stainless steel</b> 	<b>A5E39142556</b>
<b>SITRANS LR200 Horn Antenna Kits with mounting screws (no emitter supplied)</b> 	
80 mm (3 inch) horn antenna kit	<b>PBD:25500K02A</b>
100 mm (4 inch) horn antenna kit	<b>PBD:25500K03A</b>
150 mm (6 inch) horn antenna kit	<b>PBD:25500K05A</b>
<b>SITRANS LR200 Extension Kits for Horn Antenna with mounting screws</b>	
100 mm (4 inch) extension kit for horn antenna	<b>PBD:25501K0100A</b>
150 mm (6 inch) extension kit for horn antenna	<b>PBD:25501K0150A</b>
200 mm (8 inch) extension kit for horn antenna	<b>PBD:25501K0200A</b>
250 mm (10 inch) extension kit for horn antenna	<b>PBD:25501K0250A</b>
500 mm (20 inch) extension kit for horn antenna	<b>PBD:25501K0500A</b>
1 000 mm (40 inch) extension kit for horn antenna	<b>PBD:25501K1000A</b>

SITRANS LR200 Specials		SITRANS LR200 Specials	
	Article No.		Article No.
<b>SITRANS LR200 Flanged Rod Antenna Kit with 316L stainless steel flat faced flanges</b>		<b>SITRANS LR200 PTFE Rod Antenna Kit (100 mm shield) with 316L stainless steel 2" pipe thread process connection</b>	
Flanged PTFE rod antenna kit, 2" ASME, 150 lb. See drawing 51003 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>1)4)</sup>	<b>PBD: 51003K020AAAA</b>	PTFE rod antenna shielded kit, 2" NPT 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>3)4)</sup>	<b>PBD: 51002K0100AAA</b>
Flanged PTFE rod antenna kit, DN 50 PN 16. See drawing 51003 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>1)4)</sup>	<b>PBD: 51003K050AJAA</b>	PTFE rod antenna shielded kit, R 2" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>3)4)</sup>	<b>PBD: 51002K0100BAA</b>
Flanged PTFE rod antenna kit, JIS 10K DN 50. See drawing 51003 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>1)4)</sup>	<b>PBD: 51003K050AOAA</b>	PTFE rod antenna shielded kit, 2" G 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>3)4)</sup>	<b>PBD: 51002K0100CAA</b>
<b>SITRANS LR200 PTFE Rod Antenna Kit with 316L stainless steel 1½" pipe thread process connection</b>		<b>SITRANS LR200 Horn Antenna Kit with 316L stainless steel flat faced flange, with PTFE emitter (without waveguide)</b>	
PTFE rod antenna kit, R 1½" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring; see drawing 51004 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>4)</sup>	<b>PBD: 51004K2AAA</b>	Horn antenna kit, 2" ASME 316L stainless steel flange 3 inch horn, PTFE emitter <sup>1)4)</sup>	<b>PBD: 51006K020AAAA</b>
PTFE rod antenna kit, 1½" G 316L stainless steel process connection, FKM O-ring; see drawing 51004 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>4)</sup>	<b>PBD: 51004K3AAA</b>	Horn antenna kit, 2" ASME 316L stainless steel flange 4 inch horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K020AABA</b>
<b>SITRANS LR200 PTFE Rod Antenna Kit with 316L stainless steel 2" pipe thread process connection</b>		Horn antenna kit, 2" ASME 316L stainless steel flange 6 inch horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K020AACA</b>
PTFE rod antenna kit, 2" NPT 316L stainless steel process connection, FKM O-ring; see drawing 51005 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>4)</sup>	<b>PBD: 51005K1AAA</b>	Horn antenna kit, 2" ASME 316L stainless steel flange 8 inch horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K020AADA</b>
PTFE rod antenna kit, R 2" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring; see drawing 51005 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>4)</sup>	<b>PBD: 51005K2AAA</b>	Horn antenna kit, DN 50 PN 16 316L stainless steel flange 80 mm horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K050AJAA</b>
PTFE rod antenna kit, 2" G 316L stainless steel process connection, FKM O-ring; see drawing 51005 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>4)</sup>	<b>PBD: 51005K3AAA</b>	Horn antenna kit, DN 50 PN 16 316L stainless steel flange 100 mm horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K050AJBA</b>
		Horn antenna kit, DN 50 PN 16 316L stainless steel flange 150 mm horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K050AJCA</b>
		Horn antenna kit, DN 50 PN 16 316L stainless steel flange 200 mm horn, PTFE emitter <sup>1)2)</sup>	<b>PBD: 51006K050AJDA</b>

## Level Measurement

Continuous level measurement  
Radar transmitters

### SITRANS LR200 Specials

#### SITRANS LR200 Specials

Article No.

#### SITRANS LR200 PTFE flanged rod antenna kit with 316L stainless steel shield and 316L stainless steel flat faced flange



PTFE shielded rod antenna kit, flanged,  
3" ASME 150 lb 316L stainless steel flange,  
100 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0100AAA**

PTFE shielded rod antenna kit, flanged,  
DN 80 PN 16 316L stainless steel flange,  
100 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0100EJA**

PTFE shielded rod antenna kit, flanged,  
3" ASME 150 lb 316L stainless steel flange,  
150 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0150AAA**

PTFE shielded rod antenna kit, flanged,  
DN 80 PN 16 316L stainless steel flange,  
150 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0150EJA**

PTFE shielded rod antenna kit, flanged,  
3" ASME 150 lb 316L stainless steel flange,  
200 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0200AAA**

PTFE shielded rod antenna kit, flanged,  
DN 80 PN 16 316L stainless steel flange,  
200 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0200EJA**

PTFE shielded rod antenna kit, flanged,  
3" ASME 150 lb 316L stainless steel flange,  
250 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0250AAA**

PTFE shielded rod antenna kit, flanged,  
DN 80 PN 16 316L stainless steel flange,  
250 mm 316L stainless steel shield.<sup>1)4)</sup>

**PBD:**  
**51014K0250EJA**

#### PTFE grease

Kit, PTFE grease, 5 Dupont 1 GR Polypack

**A5E01151626**

#### Cable gland

One metallic cable gland M20 x 1.5,  
rated -40 ... +80 °C (-40 ... +176 °F), HART

**7ML1930-1AP**

One metallic cable gland M20 x 1.5,  
rated -40 ... +80 °C (-40 ... +176 °F),  
PROFIBUS PA

**7ML1930-1AQ**

#### Ex-proof plugs

Ex-proof plugs kit, 1/2" NPT, qty 5

**A5E39979991**

Ex-proof plugs kit, M20, qty 5

**A5E39979992**

- 1) Available in flange sizes including ASME, DIN and JIS.  
Please consult a local sales person for details.
- 2) Available with no pressure rating.  
Please consult a local sales person for details.
- 3) Available in other shield lengths.  
Please consult a local sales person for details.
- 4) Available with Pressure rating.  
Please consult a local sales person for details.

Customers interested in a custom designed device should consult a local sales person. For more information, please visit [http://www.automation.siemens.com/aspa\\_app](http://www.automation.siemens.com/aspa_app).