

LTC Levelogger Edge Level, Temperature, Conductivity

The LTC Levelogger Edge logs conductivity, water level and temperature. It combines a datalogger, 8-year battery, Hastelloy® pressure sensor, temperature detector, and conductivity sensor within a small waterproof housing, 7/8" x 7.5" (22 mm x 190 mm). A Titanium ceramic PVD coating protects the body against corrosion. The conductivity sensor is a 4-electrode platinum sensor, with autoranging capabilities. The minimal maintenance, sealed LTC Levelogger Edge is simple to clean and calibrate, even in the field. Using Levelogger Series Software, it displays conductivity, temperature, and temperature-compensated water level.



Level Sensor:	Piezoresistive Silicon with Hastelloy Sensor
Ranges:	5, 10, 20, 30, 100, and 200 m
Accuracy:	±0.05% FS
Resolution:	0.001% FS to 0.0006% FS
Units of Measure:	cm, m, ft, psi, kPa, bar (°C, °F)
Normalization:	Automatic Temperature Compensation
Temp Compensation Range:	0°C to 50°C
Temperature Sensor:	Platinum Resistance Temperature Detector (RTD)
Accuracy:	±0.05°C
Resolution:	0.003°C
Conductivity Sensor:	4-Electrode Platinum
Full Range:	0 to 100,000 µS/cm
Calibrated Range:	50 to 80,000 µS/cm
Accuracy:	±1% 5,000 µS/cm – 80,000 µS/cm; greater of ±2% or 15 µS/cm from 80 µS/cm – 5,000 µS/cm
Resolution:	±0.1 µS/cm
Temp Compensation Range:	0°C to 50°C
Normalization:	Specific Conductance @ 25°C
Battery Life:	8 Years (1 reading every 5 minutes)
Clock Accuracy:	±1 minute/year (-20°C to 80°C)
Operating Temperature:	-20°C to 80°C
Maximum Readings:	27,000 sets of readings in FRAM memory
Memory:	Slate or Continuous
Communication:	Optical Infra-red: USB, RS-232, SDI-12
Size:	7/8" x 7.5" (22 mm x 190 mm)
Weight:	7.05 oz. (200 grams)
Corrosion Resistance:	Titanium ceramic PVD coating
Wetted Materials:	Platinum, Hastelloy, 316L Stainless Steel, Delrin®, Viton®, Titanium ceramic PVD coating
Sampling Mode:	Linear, Event & User-Selectable with Repeat Mode, Future Start, Future Stop, Real-Time View
Measurement Rates:	2 seconds to 99 hours
Barometric Compensation:	Software Wizard and Barologger Edge

LTC Models	Full Scale (FS)	Accuracy	Resolution
M5, C80	5 m (16.4 ft.)	± 0.3 cm (0.010 ft.)	0.001% FS
M10, C80	10 m (32.8 ft.)	± 0.5 cm (0.016 ft.)	0.0006% FS
M20, C80	20 m (65.6 ft.)	± 1 cm (0.032 ft.)	0.0006% FS
M30, C80	30 m (98.4 ft.)	± 1.5 cm (0.064 ft.)	0.0006% FS
M100, C80	100 m (328.1 ft.)	± 5 cm (0.164 ft.)	0.0006% FS
M200, C80	200 m (656.2 ft.)	± 10 cm (0.328 ft.)	0.0006% FS

Features

- Corrosion resistant Hastelloy pressure sensor
- Titanium ceramic PVD coating
- 4-electrode platinum conductivity sensor
- Single or multi-point conductivity calibration
- Basic and advanced data compensation options

User-Friendly Operation

Calibration and Data Wizards guide you through the calibration process and barometric compensation, to provide corrected data.

Levelogger Software allows you to easily program your preferences, download data, and display data in a graph or table format or export to other programs. The Real Time View option allows immediate viewing of live conductivity, water level and temperature readings.

Leveloggers are easy to deploy; installation can be with direct read cables or wireline/cord suspension. The LTC Levelogger Edge is SDI-12 compatible using the Solinst SDI-12 Interface Cable.

Data can be downloaded in the field using the DataGrabber™ USB data transfer device, or through Bluetooth® using the Levelogger App Interface device. The LTC Levelogger Edge is also compatible with the 9500 LevelSender telemetry system, designed to send your data wirelessly by email or SMS.

Applications

- Salt water intrusion and soil salination monitoring
- Plume remediation monitoring and studies
- Leachate monitoring at landfills, mine tailings, waste disposal storage sites, and more
- Agricultural and stormwater runoff monitoring
- Tracer tests

®Solinst and Levelogger are registered trademarks of Solinst Canada Ltd.

Biofoul Screen

When an LTC Levelogger Edge is deployed for an extended period, there is the risk of biofouling on the pressure sensor and/or conductivity cell, which can compromise their readings.

The Biofoul Screen is designed to reduce the unwanted buildup of microorganisms, plants, algae, or organisms such as barnacles and mussels, on the instrument sensors. The Biofoul Screen consists of a Delrin sleeve wrapped with copper wire. It simply slips onto the sensor end of an LTC Levelogger Edge, where it is held in place by compression fit.

Using the natural anti-fouling characteristics of copper, the Biofoul Screen is an affordable option to lengthen the time an LTC Levelogger Edge can be deployed. It reduces site visits and time spent cleaning Leveloggers, and improves long-term performance by ensuring accurate sensor measurements.



An optional Biofoul Screen provides extra protection for the LTC Levelogger Edge pressure and conductivity sensors in harsh environments.

Levelogger App & Interface

The Solinst Levelogger App is designed to communicate to Solinst dataloggers via your smart device. Programming options include start/stop, data downloading, linear and real-time sampling, future start/stop, and GPS coordinates.

The Levelogger App Interface uses *Bluetooth®* wireless technology to connect with your smart device running the Solinst Levelogger App. Use our Levelogger App Interface and a Solinst Direct Read Cable, to communicate to a downhole Levelogger and email data files right from the field (see Model 3001 Solinst Levelogger App & Interface data sheets).



Convenient and Intuitive

- App is available for free
- Download data in the field
- Linear & real-time sampling options



LevelSender Telemetry System

Instantly add cellular telemetry to your LTC Levelogger Edge by connecting to a Model 9500 LevelSender. Send data by email or SMS from your remote stations to your desired location. The LevelSender simplifies your telemetry setup, by working with Solinst direct read cables and is compatible with the full Levelogger Series product line. (see Model 9500 LevelSender data sheet).

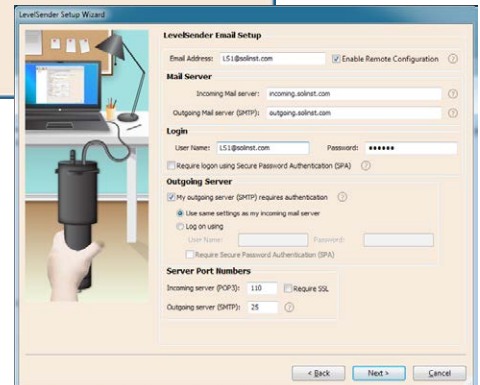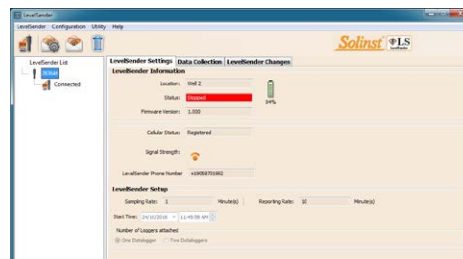

DataGrabber is a trademark of Solinst Canada Ltd.

®Delrin and Viton are registered trademarks of DuPont Corp.

®Hastelloy is a registered trademark of Haynes International Inc.

®The Apple logo is a trademark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Solinst Canada Ltd. is under license.