



## Proteus Water Quality Sensor

An award-winning multi-parameter, real-time sensor platform (portable or permanent) that accurately and reliably measures BOD, COD and faecal coliforms for permanent and temporary applications.

The Proteus is the world's first scientifically proven real-time sensor for measuring BOD that can measure a wide range of applications. A multiprobe that measures your choice of parameter, all in one package, that can deliver data in the toughest field conditions. The Proteus has been designed for its ease of use, reliable data and economical operation.

### Applications

- BOD Loading to Wastewater Treatment Works (WWTWs)
- Combined Sewage Overflow (CSO) event monitoring
- Point Source Pollution monitoring
- Faecal Coliform monitoring
- Efficiencies of Wastewater Treatment Works
- Diffuse Pollution Monitoring
- Groundwater Water Quality Monitoring
- Survey tool combined with Bluetooth®

### Parameters include:

- BOD
- Dissolved Oxygen
- Pressure
- Chloride
- pH
- Temperature
- Optical Brighteners
- Nitrate
- Faecal Coliforms
- ORP / REDOX
- Tryptophan
- Refined Oils
- Ammonium
- EC / Salinity / TDS
- Turbidity
- Crude Oils CDOM
- COD
- TOC



Self cleaning: As it is essential that optical sensors have a cleaning mechanism, the Proteus is also supplied with an integral wiper which cleans all of the Proteus' sensors before every measurement cycle.

Virtually maintenance free: The system is fully serviceable in the field and requires almost no maintenance. Logs data unattended minimizing manpower requirements and safety issues.

Multiple power options: Power can be provided by an optional internal lithium battery pack for unattended logging, or an external power source (battery, mains or solar). External ON/OFF switch for logging without need for PC connection.


Improved process control: Let the Proteus monitor multiple process parameters 24/7.

Simple to use & intuitive software

Apply more sensors: The patent-pending and award-winning Proteus breaks the boundaries of water quality meters. The Proteus offers a unique platform to add additional sensors such as pH, REDOX, electrical conductivity, dissolved oxygen, turbidity and many others.

Robust build quality with stainless steel and Delrin outer casing

Easy integration: The Proteus can be effortlessly integrated with telemetry/SCADA systems and other datalogging devices with external RS232/Modbus/SDI12 or simply by using its internal datalogger. The integrated datalogger can log 1,000,000 readings and it can be used with Tablets/Mobile Phones.

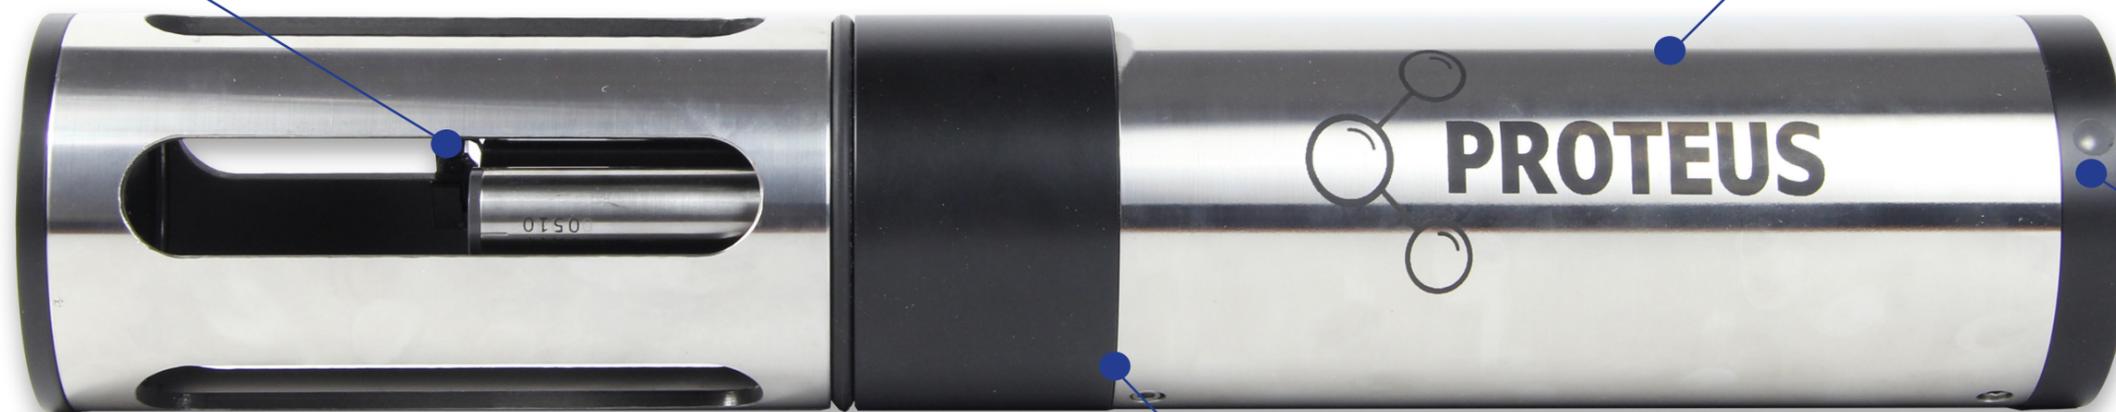

Measure bacteria/coliforms: The Proteus is the first instrument globally that has the potential to measure bacteria/coliforms in drinking water in real time.

Status LED

Sensor Specifications					
Parameter	Range	Resolution	Accuracy	Comments	
<b>BOD</b>	BOD mg/l	0-300 mg/l	0.01 mg/l <sup>-1</sup>	< 5 % of reading*	Local site calibration can improve accuracy. * providing adequate field calibration
<b>Coliform Counts</b>	per 100ml <sup>-1</sup>	>1 count/100ml <sup>-1</sup>	1 count/100ml <sup>-1</sup>	1 count/100ml <sup>-1</sup>	
<b>COD</b>	COD mg/l	0-600 mg/l	0.01 mg/l	< 5 % of reading*	Local site calibration can improve accuracy. * providing adequate field calibration
<b>DOC (Dissolved Organic Carbon)</b>	DOC mg/l	0 - 400 mg L <sup>-1</sup>	0.01 mg L <sup>-1</sup>	< 5 % of reading*	* Providing adequate field calibration
<b>Temperature</b>	Water Temperature	-5 to 50 °C	0.01	0.1	Never needs calibration
<b>pH/ORP</b>	pH	0 to 14 units	0.1	0.1 within 10 C of calibration, 0.2 otherwise	Refillable reference electrode; corrected for temperature; typical sensor life > 4 years
	ORP	-999 to 999 mV	1	20 mV	Platinum ORP sensor is combined with pH sensor
<b>Turbidity</b>	Turbidity	0 to 40 FNU	4 digits with maximum of two decimals	2% of reading or 0.2	Compensated for temperature; filtered for non-turbidity spikes; includes wiper to clean the optics
		40-400 FNU		2% of reading or 0.2	
		400-5000 FNU		2% of range	
	Transmissivity	0 to 100% transmission	4 digits	Linearity of 0.99R <sup>2</sup>	WETLabs SeaStar; mounts alongside the Manta
<b>Optical Dissolved Oxygen</b>	Concentration	0 to 20 mg/l	0.01	0.1	Compensated for temperature and salinity; EPA approved "lifetime" luminescence method; typical sensor cap life > 4 years
		20 to 30 mg/l	0.01	0.15	
		30 to 50 mg/l	0.1	5%	
	% saturation	0 to 500% saturation	0.1%	Corresponds with the accuracy of the concentration reading	
<b>Conductivity</b>	Specific conductance, μS/cm	0 to 5000 μS/cm	4 digits with maximum of one decimal	±0.5% of reading ±0.001	Corrected for temperature; four easy-to-clean graphite electrodes; optional sensor provides ±0.5% of reading accuracy to 100 mS/cm.
		0 to 10 mS/cm		±1% of reading ±0.001	
		10 to 100 mS/cm		1% of reading	
		100 to 275 mS/cm		2% of reading	
		Salinity	0 to 70 PSS	0.01	0.2
	Total dissolved solids (TDS)	0 to 65 g/	0.1	5% of reading	Calculated from specific conductance

Sensor Specifications					
Parameter	Range	Resolution	Accuracy	Comments	
<b>Pressure</b>	Depth	0 to 25 m	0.01	0.05	Compensated for temperature and salinity; 0.05 m out of 25 m is 2" out of 100 feet; 0.4 m out of 200 m is a football length out of two football fields
		0 to 200 m		0.4	
	Vented depth (level)	0 to 10 m	0.001	0.003m	Compensated for temp, salinity, barometric pressure
	Barometric pressure	400 to 900 mm Hg	0.1	1.5	Included with depth sensor
	Total dissolved gas (TDG)	400 to 1,400 mm Hg	0.1	1	Compensated for temperature; maximum depth 15m
<b>Fluorometers</b>	Chlorophyll a - blue	0 to 500 μg/l	6 digits with maximum of two decimals	Linearity of 0.99R <sup>2</sup>	Highest-quality Turner Designs fluorometric sensors; fluorometers often require non-trivial calibration; custom optics available upon request
	Chlorophyll a - red	0 to 500 μg/l			
	Rhodamine dye	0 to 1000 ppb			
	Phycocyanin (fresh-water BGA)	0 to 40,000 ppb			
	Phycocerythrin (marine BGA)	0 to 750 ppb			
	CDOM/fDOM	0 to 1250 or 0 to 5000 ppb			
	CDOM/fDOM custom	0 to 1250 or 0 to 5000 ppb			
	Optical brighteners	0 to 15,000 ppb			
	Tryptophan	0 to 20,000 ppb			
	Fluorescein dye	0 to 500 ppb			
<b>Ion-selective electrodes (ISE's)</b>	Ammonium	0 to 100 mg/l as nitrogen	0.1	5% or 2 mg/l	Corrected for ionic strength (via conductivity readings); the accuracy specification relies on non-trivial maintenance practice and frequent calibration near the temperature of measurement; ammonium and nitrate require tip replacement every 3 - 6 months
	Nitrate	0 to 100 mg/l as nitrogen			
	Chloride	0 to 18,000 mg/l			
	Sodium	0 to 20,000 mg/l			
	Calcium	0 to 40,000 mg/l			
	Bromide	0 to 80,000 mg/l			
<b>PAR</b>	Photometric PAR	10,000 μmol/sm <sup>2</sup>	4 digits	5% of reading	LiCor spherical sensor

<b>Internal Power Battery Life</b>	1 to 24 month depending on sensors / logging rates	<b>Sample Rate</b>	1 Hz
<b>External Power</b>	5-15 vdc	<b>Data Memory</b>	>1,000,000 logged readings
<b>Operating Temperature</b>	-5 to 50 °C	<b>Logging Rates</b>	1 second to 1 day
<b>Depth Rating</b>	200 m	<b>Warranty</b>	2 years* * All sensors included except ISE's (Ammonia/nitrate/chloride)
<b>Communications</b>	RS-232, SDI-12, USB or Bluetooth		

General Specifications	Proteus 30	Proteus 35	Proteus 40
<b>Diameter</b>	75 mm (2.95")	89 mm (3.5")	102 mm (4.00")
<b>Length - w/o Battery Pack</b>	483 mm (19")	483 mm (19")	483 mm (19")
<b>Weight - with IBP</b>	2.3 kg (5.0 lbs)	4.1 kg (9.0 lbs)	4.5 kg (10.0 lbs)
<b>Number of sensors</b>	Up to 7	Up to 11	Up to 13
<b>Battery Pack</b>	8 "C" cells	8 "C" cells	8 "C" cells

Parameter Information	
<b>Ammonia (NH<sub>3</sub>)</b>	Ammonia is normally found in very low concentrations in natural waters. It is a result of microbiological activity breaking down nitrogen-containing material. Elevated levels of ammonia can be very harmful to aquatic life and fish in particular.
<b>Biochemical oxygen demand (BOD)</b>	Biochemical oxygen demand is a measure of the amount of oxygen used by microorganisms (e.g., aerobic bacteria) in the oxidation of organic matter. High levels of BOD (due to excess organic matter) indicate greater consumption of oxygen by microorganisms, meaning less is available to fish and other aquatic life.
<b>Chemical Oxygen Demand (COD)</b>	Chemical Oxygen Demand (COD) measures the amount of oxygen required to chemically oxidize the organic material and inorganic nutrients, such as Ammonia or Nitrate, present in water. It is widely used as an indicator of organic pollution and many industrial and wastewater effluents have strict permits associated with COD concentration.
<b>Conductivity</b>	Conductivity is a measure of the ability of water to pass an electric current; it is affected by the presence of dissolved solids such as chloride, nitrate and phosphate. Conductivity can be a very useful indicator that a discharge of some sort has entered a stream, or some other change has occurred.
<b>Dissolved oxygen</b>	Oxygen is essential for the survival of aquatic life and is incorporated into surface waters by direct absorption from the atmosphere, more so in turbulent streams. It is then consumed by organisms and decaying organic matter. An excess of decaying organic matter leads to a shortage of oxygen, which can prove fatal for fish.
<b>Faecal Coliforms</b>	Coliforms (coliform bacteria) are rod-shaped gram-negative bacteria that are commonly used as an indicator of the sanitary quality of water
<b>Nitrate (NO<sub>3</sub>-)</b>	Nitrate is a naturally occurring by-product of the breakdown of organic waste. In low concentrations it stimulates the growth of aquatic plants. At higher concentrations it can be directly harmful and can also lead to excess algae growth and eutrophication. The primary source of excess nitrate is surface runoff from agricultural land.
<b>pH</b>	pH is related to the concentration of hydrogen ions in a solution and is a measure of acidity or alkalinity. In natural ecosystems it can vary from around 4.5, for acid peaty upland waters, to over 10.0 where there is intense photosynthetic activity.
<b>Redox (ORP)</b>	Redox (Reduction-oxidation) or ORP (Oxidation Reduction Potential) is a measure of the oxidising or reducing potential of a water body. Many important biochemical processes are oxidation or reduction reactions (e.g. ammonia>nitrite>nitrate). The ORP level in a river or treatment plant will govern (along with DO and pH levels) which reactions are prevalent.
<b>Temperature</b>	Physical temperature of the watercourse. Largely dictated by climate, but also of interest around thermal discharges. Temperature extremes can be harmful to aquatic organisms, and also have an effect on other parameters, e.g. pH and dissolved oxygen.
<b>Turbidity</b>	Turbidity is a measure of the clarity of water. Silts and soils that are suspended within rivers and lakes cause high levels of turbidity, especially during storm and run-off events.