

## Levelogger Gold

Model 3001

The Levelogger® Gold is completely designed, developed and manufactured in-house, in the tradition of all Solinst high quality products. Due to the Solinst commitment to providing leading-edge instruments designed for repeatable accuracy, the Levelogger Gold is always advancing.


The Levelogger Gold is a water level and temperature recording device. It combines a datalogger, 10-year battery, pressure transducer and temperature sensor, in a small, minimal maintenance, 7/8" x 6" (22 mm x 154 mm) stainless steel housing. The sealed Faraday cage design greatly simplifies maintenance and provides protection against electrical spikes caused by lightning. A Zirconium Nitride coating resists corrosion.

The Levelogger Gold offers high resolution and reliability with an accuracy of 0.05%. The Levelogger Gold has excellent transducer, temperature and clock accuracies. Altitude, water density, temperature and barometric compensations also add to the accuracy and instrument stability.

High accuracy, long-term stability and an internal battery that lasts for 10 years when reading every minute, make Leveloggers the ideal devices for recording water levels. A Barologger provides the easiest and most accurate method of barometric compensation.

### Applications

- Pumping and slug tests
- Watershed, drainage basin and recharge monitoring
- Stream gauging, lake and reservoir measurement
- Harbor and tidal fluctuation monitoring
- Wetlands and stormwater run-off monitoring
- Tank level monitoring
- Input water level data to SCADA/PLC systems
- Long-term water level monitoring in wells, surface water bodies and seawater environments

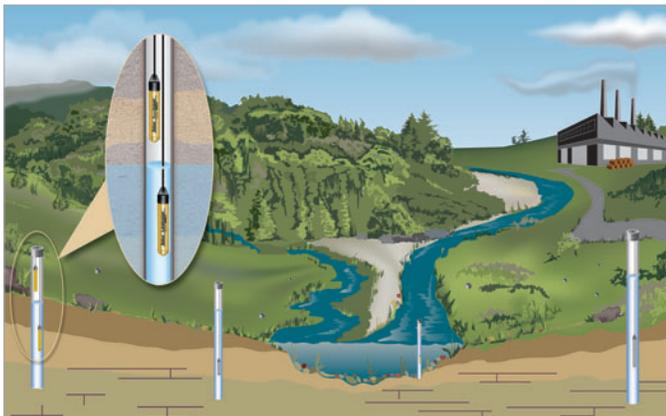

### Features

- Self-test capability
- Maintenance-free, waterproof design
- Protected from power surges, such as lightning
- Real-time viewing; data can be exported
- Radio, satellite or cellular telemetry
- SDI-12 compatible, up to 1500 ft (450 m)
- User-selectable, 30 line sampling schedule

### Robust Memory

The Levelogger Gold memory allows a maximum of 40,000 readings of level and temperature, set up in individual logs. The user has a choice of slate or continuous logging when operating in linear mode. In event-based and schedule sampling, memory is a form of circular slate, which starts logging from the end of the last log and wraps around to eventually overwrite older logs, but which will stop at the start of the current log. A separate redundant memory provides backup of the last 1200 readings, which can be accessed by a Diagnostic Utility program.

### Downloading Options

The Levelogger Gold offers 4 download options: 'All Data' downloads the complete log, or the user can save time by selecting 'Append Data', when only new data is desired. A selected period of time prior to the last date stamp can be downloaded using 'Partial Download'. 'Recover Previous Log' is a safeguard in case the Levelogger has been restarted without downloading data. A complete data dump is also available as a feature of the Diagnostic Utility, which downloads all available memory in the Levelogger Gold.

### High Accuracy

The Levelogger Gold has an accuracy of at least 0.05% net FS, a resolution of 0.0006 to 0.002% depending on range, a Barologger with algorithms based on air not water, enhanced altitude, density, temperature and barometric compensation, as well as a very accurate clock.

® Solinst and Levelogger are registered trademarks of Solinst Canada Ltd.



## Convenient Sampling Options

Solinst includes a very flexible, user-selectable sampling schedule, as well as the standard linear and event-based sampling options. Linear sampling can be anywhere from 0.5 seconds to 99 hours.

Event-based sampling can be set to record when the level changes anywhere from 0.1% up to 25% of the full range of the logger. Readings will be checked at the selected time interval, but only recorded in memory if the condition has been matched or exceeded.


The Schedule option allows up to 30 schedule items, each with its own sampling rate of seconds, minutes or hours, and a duration of seconds, minutes, hours, days or weeks. A running total of sample time and number of readings available are indicated and updated. Templates of these Schedules, and Levellogger Settings, can be saved for easy re-use.

## Levellogger Operation

Solinst has made programming the Levellogger Series extremely intuitive. Simply place the Levellogger in the optical reader or connect to the direct read cable. All in one screen, fill in the information fields for location, project ID, sample mode and rate, altitude, density adjustment and any desired offset.

Levellogger time may be synchronized to the computer clock, or the Levellogger Gold clock, or it can be user defined. There are options for immediate start or a future start time. The percentage battery life remaining and the amount of free memory are indicated on the settings screen.

A manual measurement of the initial water depth is usually taken at each location, and noted as a base line measurement. When a Barologger is used for barometric pressure measurement, it is set above high water level in one location on site. If direct read cables are being used, data can also be viewed, logged on demand and retrieved from the Levellogger at any time using a Levelloader or a portable computer.

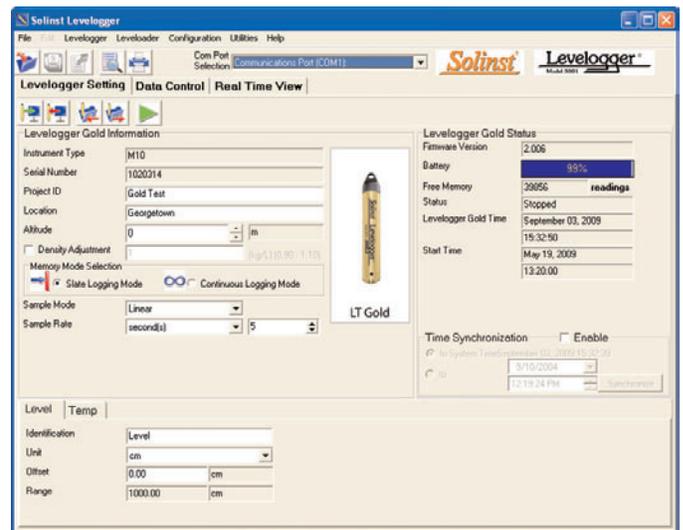


Levellogger Settings Window

## Data Download, Viewing and Export

Data is downloaded to a PC with the click of a screen icon or with the push of a button on the Levellogger. Collected data is retained in the Levellogger until it has been written over. The level data downloaded from a Levellogger has already been automatically compensated for temperature and altitude and the temperature data is also downloaded.

Barometric compensation of the Levellogger data is performed by a Wizard that can be used to input elevation offsets and adjust for Barometric efficiency. The software allows immediate viewing of the data in graph or table format using the 'Real Time View' option. It also allows easy export into a spreadsheet or database for further processing.

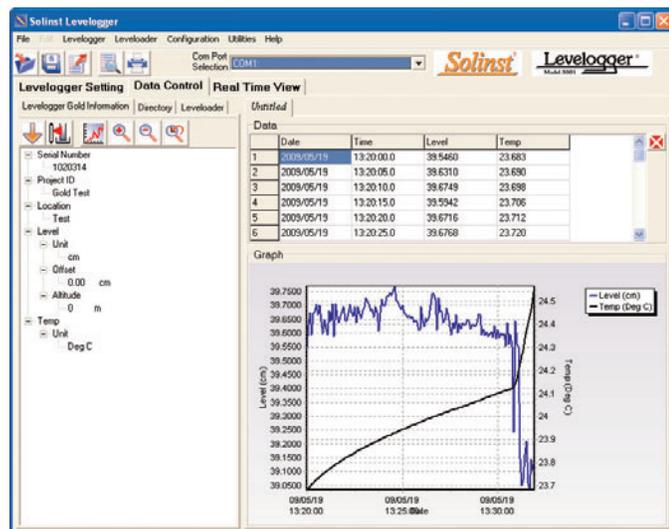

Real Time View Window

## Use of Direct Read Cables

When it is desired to get real-time data and communicate with Leveloggers without removal from the water, they can be deployed using direct read cables.

The lower end of the direct read cable has a miniaturized infra-red optical reader. The top cap of the Levelogger is removed and the direct read cable is threaded in its place. In turn, the upper end of the cable is attached to a portable computer or Leveloader, via a USB or RS232 PC Interface Cable. This allows viewing of the data, downloading and/or programming in the field.

Leveloggers can also be connected to an SDI-12 datalogger using the Solinst SDI-12 Interface Cable attached to a direct read cable.

The full benefits of a sealed Levelogger with no vent tube or electrical cable connection are also maintained. The logger is still sealed from all electrical interference through a Faraday cage design. Cable handling problems are minimized.



*A Direct Read Cable with a Levelogger connected, attaches to a PC Interface Cable at a 2" Well Cap*



*PC Interface Cable connected to the Direct Read Cable*



*Enviro Cap™ lockable cap and key used with Wireline and Hooks*

## Helpful Utilities

The 'Self-Test Diagnostic Utility' can be used in case of an unexpected problem. It checks the functioning of the program, calibration, backup and logging memories, the pressure transducer, temperature sensor and battery voltage, as well as enabling a complete Memory Dump, if required. A Firmware Upgrade will be available from time to time, to allow upgrading of the Levelogger Gold, as new features are added.

## Direct Read Cable Specifications

Direct read cables are available for attachment to any Levelogger, new or old, in standard lengths of: 15', 50', 100', 200', 250', 300' and 5m, 15 m, 30 m, 60 m, 80 m, 100 m. Custom cable lengths up to 1500 ft (450 m) are also available to fit particular monitoring situations, as required. Cable markings are available upon request.

The 1/10" dia. (2.54 mm) coaxial cable has an outer polyethylene jacket for strength and durability. A stranded stainless steel braided conductor gives non-stretch accuracy.

The upper end of the direct read cable is fitted with a connector that can act as a well cap for a 1" well. This connector fits Solinst Levelogger well caps designed for 2" or 4" wells, and can easily be tethered at surface in other situations.

## Use of Suspension Wireline and Kevlar Cord

Leveloggers may also be suspended in the water on a stainless steel wireline or Kevlar® cord. This is a very inexpensive method of deployment, and if in a well, allows the Levelogger to be easily locked, out of sight and inaccessible to anyone without a special key.

Solinst has adapted the Enviro Cap™ by adding a vent hole in the cap to allow for the equalization of barometric pressure in the well. The well cap has a convenient eyelet from which to suspend the Levelogger. It slips into the casing and is locked in place with the tamper-proof key, as shown.

The Enviro Caps are available sized for 2" and 4" wells. Well caps for other sizes of well can also be used.

## Accurate Barometric Compensation

Leveloggers measure absolute pressure (water pressure + atmospheric pressure) expressed in feet, meters or centimeters of water column.

The most accurate method of obtaining changes in water level is to compensate for atmospheric pressure fluctuations using a Barologger. This avoids any time lag in the compensation calculation and any errors introduced due to moisture buildup, kinking or damage to vented cable. The new Barologger Gold uses algorithms based on air rather than water pressure, which gives superior accuracy. The recorded barometric information can also be very useful to help determine barometric lag and/or barometric efficiency of the monitored aquifer.

The Data Compensation Wizard in the Levelogger software greatly simplifies the barometric adjustment of the water level measurements by using the synchronized data from one on-site Barologger with all the Leveloggers.

The overall results give more reliable, highly accurate level data than that obtained when using high maintenance and expensive vented cable.

® Kevlar is a registered trademark of DuPont Corp.

## Levelogger Gold Specifications

<b>Level Sensor:</b>	Piezoresistive Silicon in 316L Stainless Steel
Accuracy:	0.05% net FS
Stability of Readings:	Superior, low noise
Resolution:	0.002 to 0.0006% FS
Normalization:	Automatic Temp Compensation
<b>Temperature Sensor:</b>	Platinum Resistance Temperature Detector
Temp. Sensor Accuracy:	± 0.05°C
Temp. Sensor Resolution:	0.003°C
Temp. Comp. Range:	-10°C to +40°C
Battery Life:	10 Years - based on one reading/min
Clock Accuracy:	± 1 minute/year
Operating Temperature:	-20°C to 80°C
Maximum # Readings:	40,000 of level and temperature
Memory:	Superior reliability EEPROM (Slate, or Continuous) plus redundant backup of last 1200 logs
Communication:	Optical Infra-Red Interface, Serial at 9600 Baud, Conversion to RS232 or USB Computer Connection
Size:	7/8" x 6" (22 mm x 154 mm)
Weight:	6.3 oz (179 grams)
Backwards Compatibility:	Full
Corrosion Resistance:	Zirconium Nitride (ZrN) Coating
Other Wetted Materials:	316-L Stainless Steel, Delrin®, Viton®
Sampling Modes:	Linear, Event and User-Selectable with 30 separate line items
Measurement Rates:	0.5 sec to 99 hrs
Barometric Compensation:	Software Wizard and one Barologger in local area (approx. 20 miles/30 km) radius

Models	Full Scale (FS)	Accuracy (typical)	Resolution
Barologger	4.92 ft., 1.5 m	± 0.003 ft., 0.1 cm	0.002% FS
F15, M5	16.4 ft., 5 m	± 0.010 ft., 0.3 cm	0.001% FS
F30, M10	32.8 ft., 10 m	± 0.016 ft., 0.5 cm	0.0006% FS
F65, M20	65.6 ft., 20 m	± 0.032 ft., 1 cm	0.0006% FS
F100, M30	98.4 ft., 30 m	± 0.064 ft., 1.5 cm	0.0006% FS
F300, M100	328.1 ft., 100 m	± 0.164 ft., 5 cm	0.0006% FS

**Levelogger Junior:** See Model 3001 Junior Data Sheet for details  
**Conductivity:** See Model 3001 LTC Levelogger Junior Data Sheet

## Leveloader Gold

The Leveloader Gold is a data transfer unit designed for use with all versions of the Solinst Levelogger, Barologger and Rainlogger. It is used to download and store multiple data files.



The 8 Mb FLASH memory stores up to 1,390,000 LT readings, 930,000 LTC readings, or 34 full Levelogger downloads. It can also be used to display data in real-time, and has optional password protection.

Simply use the connector cables for attachment to a Levelogger, or to a direct read cable, to allow downloading or reprogramming of the Levelogger settings in the field. It comes with cables for USB and RS232 connection to a PC for data transfer. (See Model 3001 Leveloader Gold Data Sheet.)

## STS Telemetry



The STS Gold Telemetry System provides an economical and efficient method to access remote data instantly. Built for the Levelogger Series, the system combines high quality dataloggers, intuitive software and a variety of wireless communication options to create a remote monitoring solution.

CDMA and GSM digital cellular, satellite and radio wireless communication options give the flexibility to suit any project. Systems are suitable for both small to large networks. The STS Gold is designed to save costs by enabling the self-management of data, as well as remote collection of the data. Alarm notification, remote firmware upgrades and diagnostic reporting make system maintenance simple. (See Model 9100 Data Sheet.)

## RRL Telemetry

The inexpensive RRL Radio Telemetry is ideal for short range applications up to 1000 ft (300 m). Distances can be increased by using some radios as 'repeater' stations. (See Model 9200 Data Sheet.)

® Delrin and Viton are registered trademarks of DuPont Corp.